


Copeland semi-hermetic compressors

Model designation


1 Suction-gas-cooled Stream compressors

	Volt	~	Hz
L (Δ)	220 - 240	3	50
L (Y)	380 - 420	3	50
M	380 - 420	3	50
R	220 - 240	3	50
Y	500 - 550	3	50
K (Δ)	220 - 240	3	60
K (Y)	380 - 420	3	60
D	440 - 480	3	60
C	208 - 230	3	60
N (Δ)	250 - 280	3	60
N (Y)	440 - 480	3	60
X	380	3	60

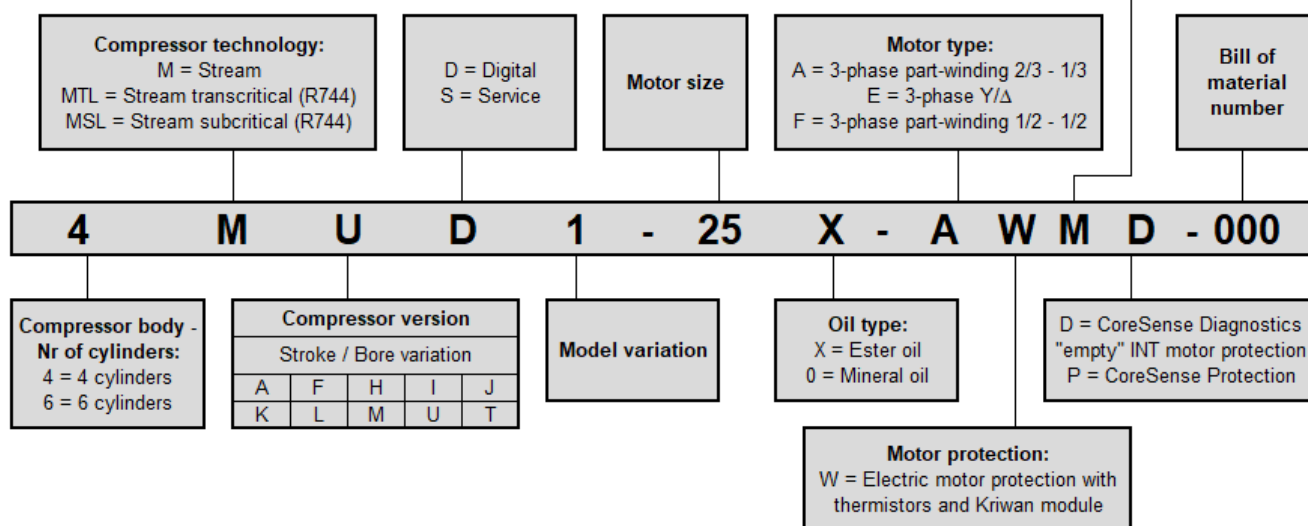


2 Air- or water-cooled compressors

2.1 Copeland designation (present models)

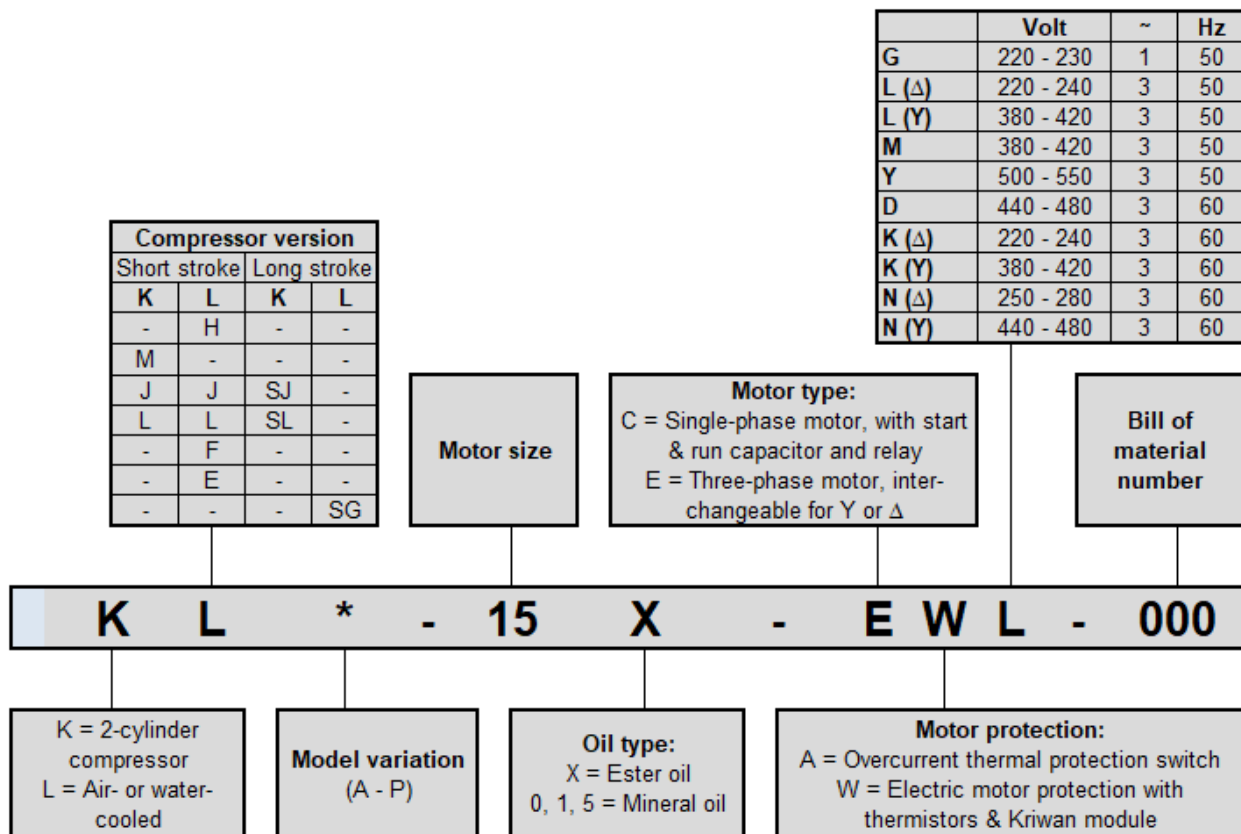


2.2 DWM Copeland designation (old models)

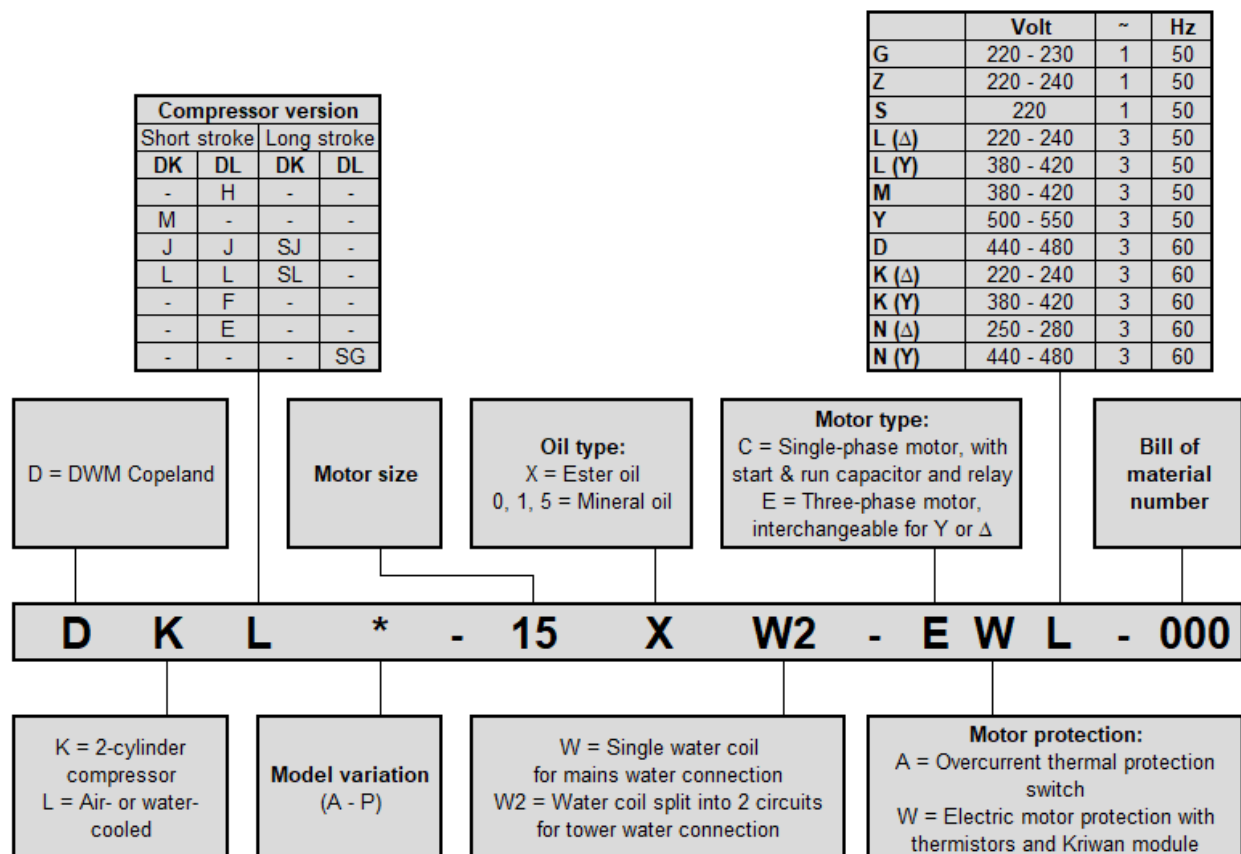


3 Suction-gas-cooled compressors


3.1 Copeland designation (present models)

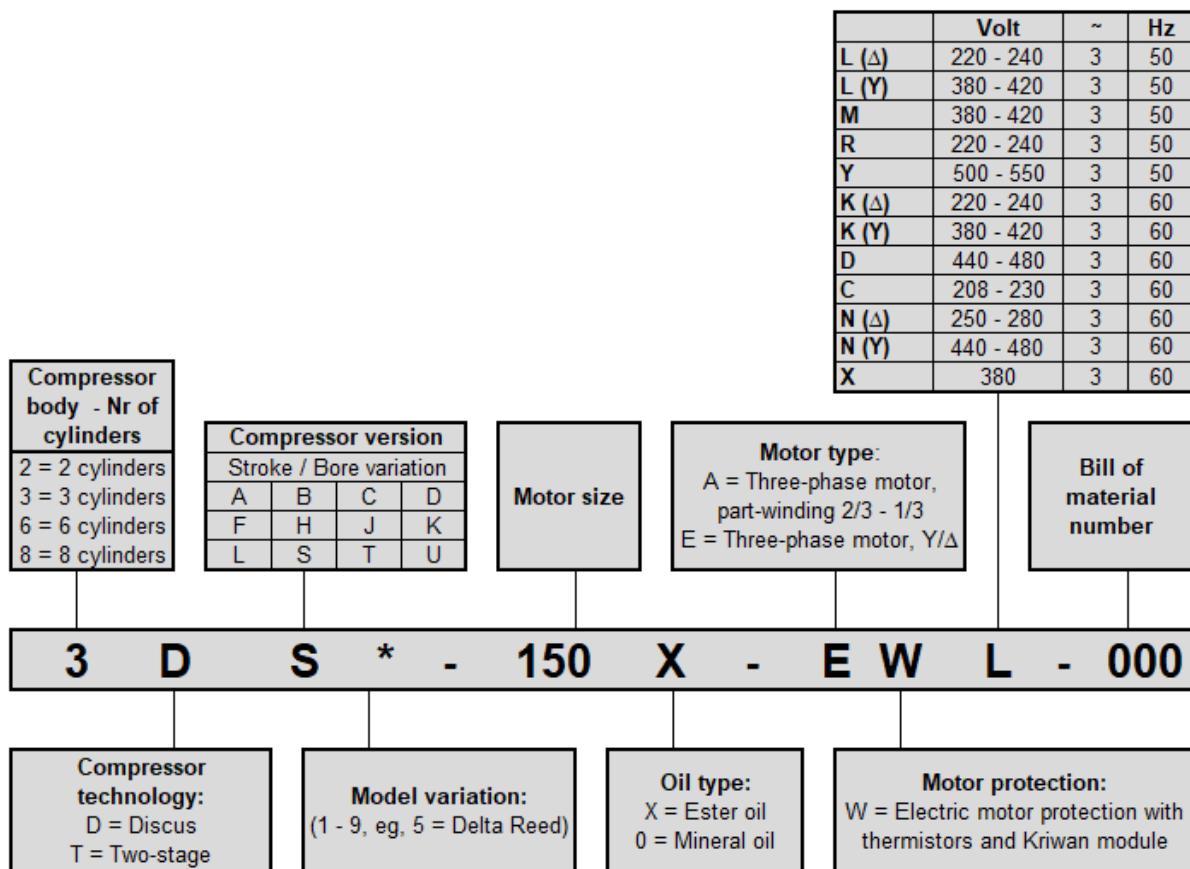

3.2 DWM Copeland designation (old models)

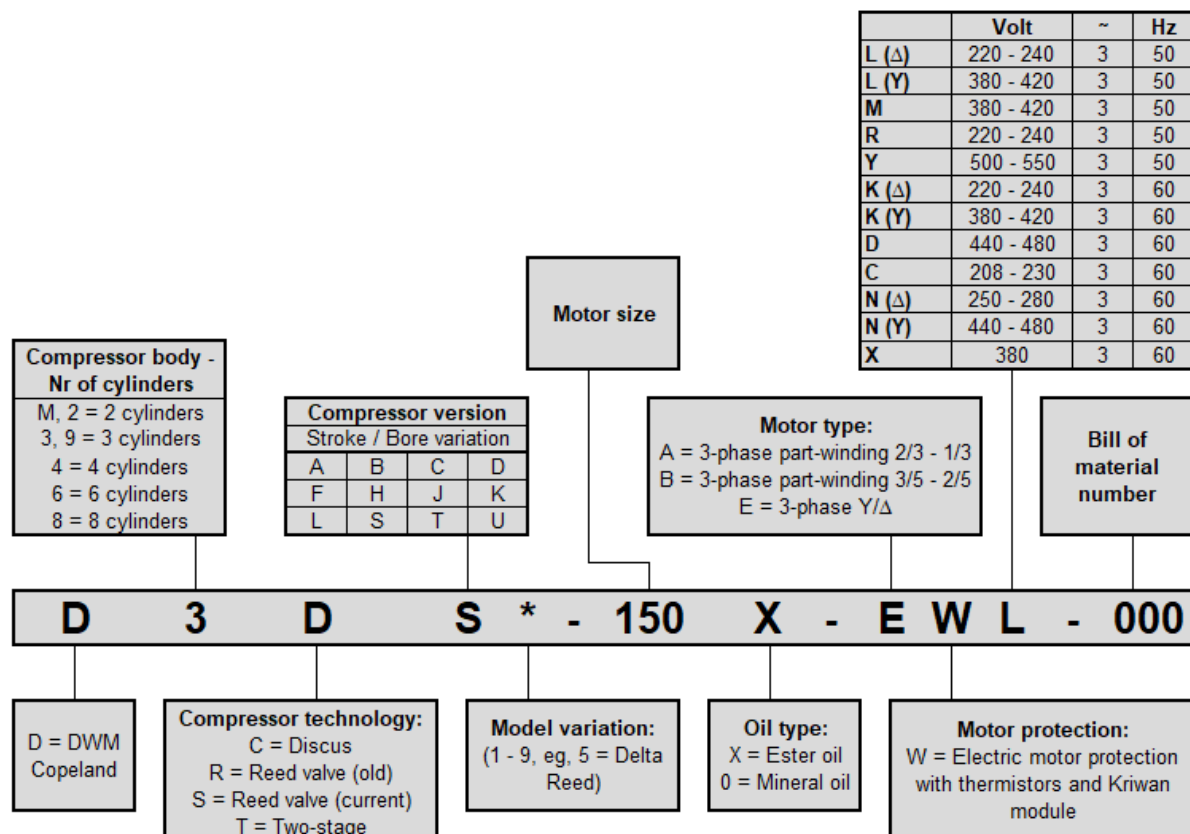

4 Suction-gas-cooled TWIN compressors

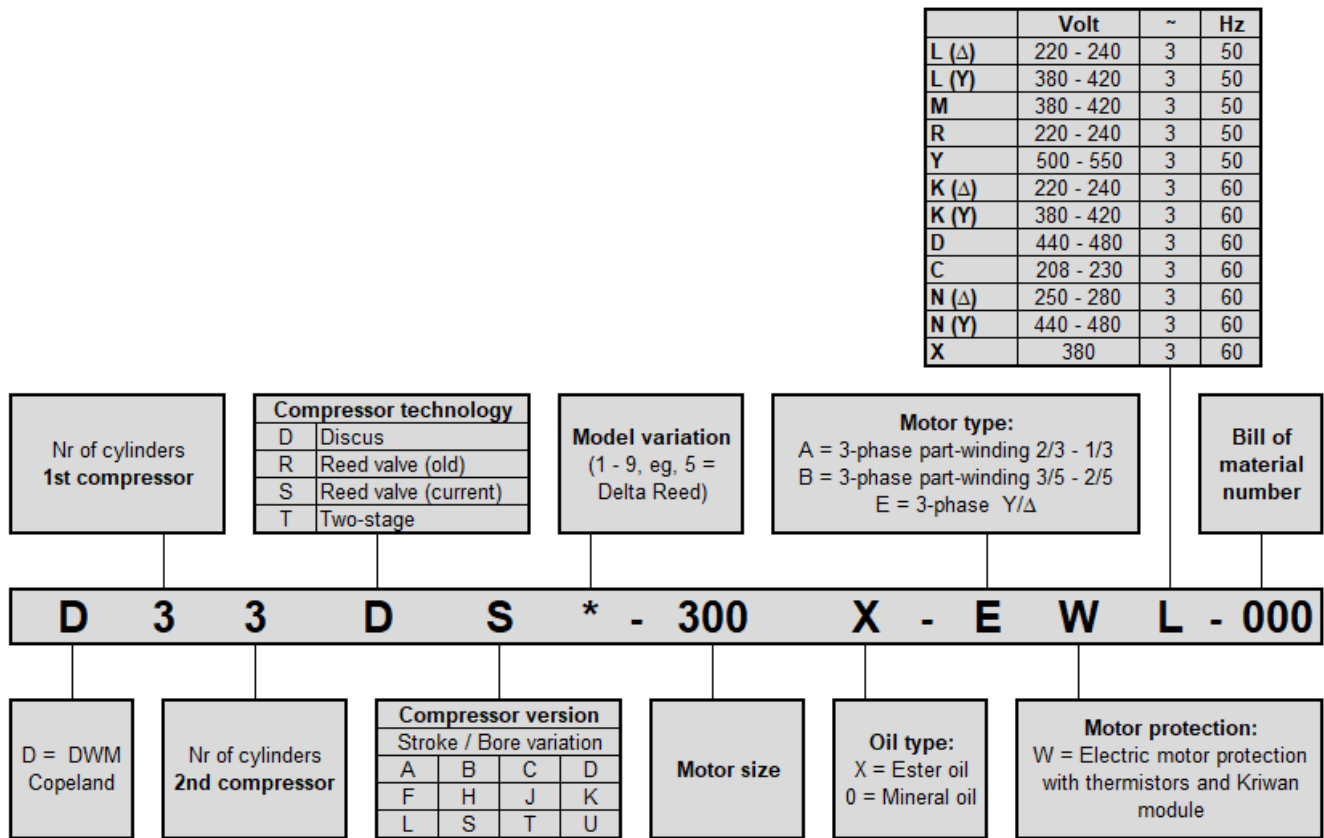

NOTE: Not all combinations are listed. Refer to brochures and to Copeland Select software at www.copeland.com/en-gb/tools-resources for product availability.

DISCLAIMER: The Copeland logo is a trademark and service mark of Copeland LP or one of its affiliates. Copeland Europe GmbH shall not be liable for errors in the stated capacities, dimensions, etc., as well as typographic errors. Products, specifications, assumptions, designs and technical data contained in this document are subject to modification by us without prior notice. Illustrations are not binding. ©2024 Copeland LP. All rights reserved.