ProTech903™ D1 / CE
Lead-Acetate Tape Analyzer for H_2S / TS

GALVANIC
APPLIED SCIENCES



ProTech Introduction
- Lead-Acetate Tape Technology for H_2S & Total Sulfur
- Manufactured In & Supported From Calgary, AB
- Backed by 40 Years of Experience in Natural Gas

Rapid Return-On-Investment
- Never Miss Unexpected Sour Event Spikes
- Guaranteed Contractual Compliance
- Automate Custody Transfer Validation
- Avoid Pipeline "Lock-Out" From Contamination

Measurement Certainty
- 0.005 ppm LDL Every 3 Minutes
- No Cross Interferences for H_2S
- Predictive Alarm in ≤ 20 Seconds
- Wide Over-Range Detection
- Multi-Stream Up to 4 Channel
- 10 Months Data Logging Storage
- CSA Div. 1
  Ex II 2 G Ex db [ia] ia op is IIB+H2 T4 Gb
  Tamb= 0 to +50°C

Key Applications
Refinery / Petrochemical
- Flare Emissions
- Catalyst Protection
- Fuel Gas

Natural Gas
- Processing Plant Inlet, Outlet, and Flare
- Natural Gas, LNG, and NGL Pipeline
- Custody Transfer



ProTech903™ D1 / CE

info@galvanic.com | +1 (403) 252-8470 | www.galvanic.com


SAM-BMM-E30-ALL-ProTech903 Brochure D1-CE H2S+TS Rev. 1
Specifications Subject to Change Without Notice

Request price and delivery for this product from Seven Star LLC, Muscat, Oman | omansevenstar.com | info@omansevenstar.com

ProTech903™ D1 / CE
Lead-Acetate Tape Analyzer for H_2S / TS

GALVANIC
APPLIED SCIENCES


Extended-Life Tape With No Interferences

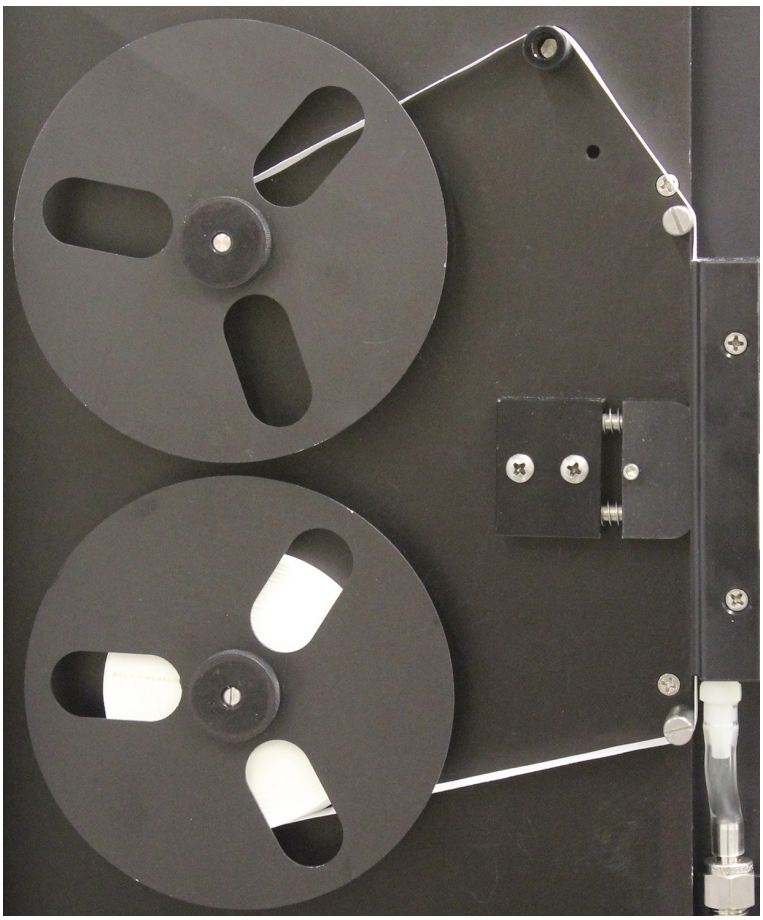


Humidifer Provides Faster Response



Large Local Display With LED Indicators

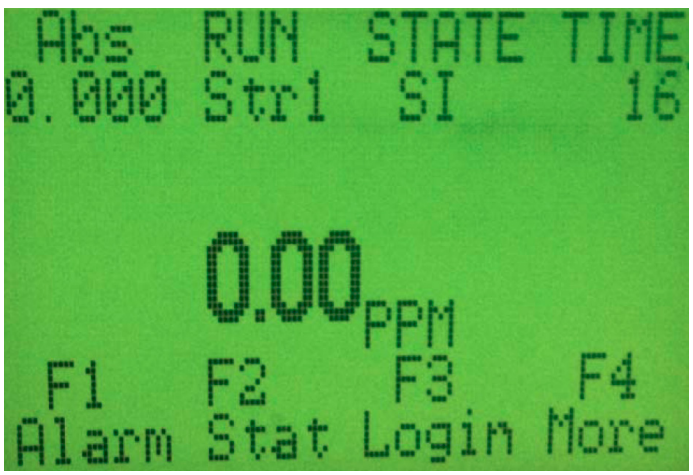

Secure Remote Access With Advanced Diagnostics

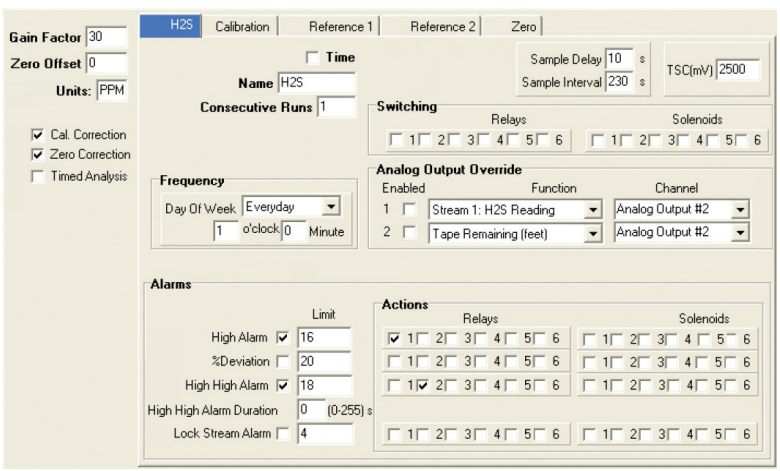

info@galvanic.com | +1 (403) 252-8470 | www.galvanic.com

SAM-BMM-E30-ALL-ProTech903 Brochure D1-CE H2S+TS Rev. 1
Specifications Subject to Change Without Notice