General Specifications

Daqstation
DX3000

GS **04L75B01-01EN**

■ OVERVIEW

The DX3000 is a DAQSTATION that displays real-time measured data on a color LCD and saves data on a CompactFlash memory card (CF card). It can be hooked up to network via Ethernet, which enables to inform by E-mail and to monitor on Web site as well as to transfer files by using FTP. Also, it can communicate with Modbus/RTU or Modbus/TCP.

It comes with a four, eight, ten, twenty, or thirty-channel model. As the input signal, a DC voltage, thermocouple, resistance temperature detector, or contact signal can be set to each channel. Log input mode allows you to measure the DC voltage input (DCV: 20 mV, 60 mV, 200mV, 2 V, 6 V, 20 V, and 50 V), convert to logarithmic scale, and display the data. Simulation function used to stop the updating of the time, trend, digital values, and bar graph.

The data saved on a CF card can be converted by data conversion software to Lotus 1-2-3, Excel, or ASCII format file, facilitating processing on a PC. Not only this, the Viewer software allows a PC to display waveforms on its screen and to print out waveforms.



■ STANDARD SPECIFICATIONS

General Specifications

Construction

Mounting: Flush panel mounting (on a vertical plane)
Mounting may be inclined downward up to 30 degrees from a horizontal plane.

Allowable panel thickness:
2 to 26 mm

Material: Case: drawn steel
Bezel: Aluminum

Case color:
Case: Grayish blue green (Munsell 2.0B 5.0/1.7 or equivalent)
Bezel: Charcoal grey light (Munsell 10B 3.6/0.3 or equivalent)

Dimensions:
448 (W) × 215 (H) × 234.2 (D) mm
17.68 (W) × 8.46 (H) × 9.22 (D) inch

Weight: 3004, DX3010: approx. 6.96 kg*
DX3008, DX3020: approx. 7.24 kg*
DX3030 : approx. 7.52 kg*
*without optional features

Input

Number of inputs:
DX3004: four channels
DX3008: eight channels
DX3010: ten channels
DX3020: twenty channels
DX3030: thirty channels

Measurement interval:
DX3004, DX3008:
125 ms, 250 ms, 25 ms (fast sampling mode*)
DX3010, DX3020, DX3030:
1 s (Not available when A/D integrationtime is set to 100 ms), 2 s, 5 s, 125 ms (fast sampling mode*)
* A/D integration time is fixed to 1.67 ms in case of fast sampling mode.

Inputs: DCV (DC voltage), TC (thermocouple), RTD (resistance temperature detector), DI (digital input for event recording), DCA (DC current with external shunt resistor attached)

GS 04L75B01-01EN
©Copyright July. 2015
3rd Edition November.2016(YK)

Input type	Range	Measuring range	
DCV	20 mV	–20.000 to 20.000 mV	
	60 mV	–60.00 to 60.00 mV	
	200 mV	–200.00 to 200.00 mV	
	2 V	–2.0000 to 2.0000 V	
	6 V	–6.000 to 6.000 V	
	1-5V	0.800 to 5.200 V	
	20 V	–20.000 to 20.000 V	
	50 V	–50.00 to 50.00 V	
TC	R*1	0.0 to 1760.0°C	32 to 3200°F
	S*1	0.0 to 1760.0°C	32 to 3200°F
	B*1	0.0 to 1820.0°C	32 to 3308°F
	K*1	–200.0 to 1370.0°C	–328 to 2498°F
	E*1	–200.0 to 800.0°C	–328.0 to 1472.0°F
	J*1	–200.0 to 1100.0°C	–328.0 to 2012.0°F
	T*1	–200.0 to 400.0°C	–328.0 to 752.0°F
	N*1	–270.0 to 1300.0°C	–454 to 2372°F
	W*2	0.0 to 2315.0°C	32 to 4199°F
	L*3	–200.0 to 900.0°C	–328.0 to 1652.0°F
	U*3	–200.0 to 400.0°C	–328.0 to 752.0°F
	WRe*4	0.0 to 2400.0°C	32 to 4352°F
RTD	Pt100*5	–200.0 to 600.0°C	–328.0 to 1112.0°F
	JPt100*5	–200.0 to 550.0°C	–328.0 to 1022.0°F
DI	DCV input (TTL)	OFF : less than 2.4 V ON : more than 2.4 V	
	Contact input	Contact ON/OFF	

*1 R, S, B, K, E, J, T, N: IEC 60584-1, DIN EN 60584-1, JIS C 1602
*2 W: W-5% Re/W-26% Re (Hoskins Mfg. Co.), ASTM E988-96
(Type C equivalent of OMEGA Engineering Inc.)
*3 L: Fe-CuNi, DIN43710, U: Cu-CuNi, DIN43710
*4 WRe: W-3%Re/W-25%Re (Hoskins Mfg. Co.), ASTM E988-96
(Type D equivalent of OMEGA Engineering Inc.)
*5 Pt100: JIS C 1604, IEC 60751, DIN EN 60751
JPt100: JIS C 1604, JIS C 1606
Measuring current: i = 1mA

A/D integration time:
20 ms (50 Hz), 16.7 ms (60 Hz), 100ms (50/60Hz for DX3010/3020/3030), or AUTO selectable (automatic selection by detection of power supply frequency)
A/D integration time is fixed to 1.67 ms (600Hz) in case of fast sampling mode.

Thermocouple burnout:
Burnout upscale/downscale function can be switched on/off (for each channel).
Burnout upscale/downscale selectable
Normal: Less than 2 kΩ, Burn out: More than 100 kΩ
Detection current: approx. 10 μA

1-5V range burnout:
Burnout upscale/downscale function can be switched on/off (for each channel).
Burnout upscale/downscale selectable
Upscale burnout: More than +10% of configured span
Downscale burnout: Less than -5% of configured span

Moving average:
Moving average on/off selectable for each channel
Moving average cycles 2 to 400 selectable

Calculation:
Differential computation:
Between any two channels
Available for DCV, TC, RTD and DI ranges.

Linear scaling:
Available for DCV, TC, RTD and DI ranges.
Scaling limits: -30000 to 30000
Decimal point: user-selectable
Engineering unit: user-definable, up to 6 characters
Over value: Exceeds ± 5% of scaling limits (on/off selectable)

Square root:
Available for DCV range.
Scaling limits: -30000 to 30000
Decimal point: user-selectable
Engineering unit : user-definable, up to 6 characters
Low level cut off: 0.0 to 5.0% of display span
Over value: Exceeds ± 5% of scaling limits (on/off selectable)

1-5VDC scaling:
Available for 1-5VDC range.
Scaling limits: -30000 to 30000
Display span limit: 0.800 to 5.200
Decimal point: user-selectable
Engineering unit : user-definable, up to 6 characters
Low level cut off: Fixed to lower span limit
Over value: Exceeds ± 5% of scaling limits (on/off selectable)

Display

Display unit:
10.4-inch TFT color LCD (VGA, 640 × 480 pixels)
Note) In the part of crystal display, there are some pixels that can't always turn on or off. Please understand that the brightness of screen looks uneven because of characteristics of crystal display, but it is not out of order.

Display group:
Each measurement channel and computation channel can be assigned to display group of the trend, digital and bargraph display.
Number of display: 36 groups
Number of assignable channels for one group: 10 channels

Display color:
Trend/Bargraph:
Selectable from 24 colors
Background:
White or black selectable

Trend display:
Trend display type:
Vertical, horizontal, landscape, horizontal split or circular selectable
Number of indication channels:
10 channels per display (maximum)

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

Number of display:
36 displays (36 groups)
Line width:
1, 2, and 3 pixels selectable
Scales: Maximum 10 scales.
Bargraph, green band area and alarm mark can be displayed on scale display.
Number of divisions: Selectable from 4 to 12 or C10 (10 divisions by main scale mark and scale values are displayed on 0, 30, 50, 70 and 100% position).
Trend update rate:
5, 10, 15, 30 sec.,1, 2, 5, 10, 15, 20, 30 min., 1, 2, 4, 10 hours/div selectable (5, 10 sec/div is available for only DX3004 and DX3008. DX3010, DX3020, DX3030 can be specified to 15 sec/div when they are in fast sampling mode.)
Circular waveform span rate:
20, 30 min., 1, 2, 6, 8, 12, 16 hours, 1, 2 days, 1, 2, 4 weeks/rev selectable

Bargraph display:
Direction: Vertical or horizontal selectable
Number of indication channels:
10 channels per display
Number of display:
36 displays (36 groups)
Scales: Green band area and alarm mark can be displayed on scale display.
Number of divisions: Selectable from 4 to 12
Reference position: Left, right or center
Display renewal rate: 1 s

Digital indication:
Number of indication channels:
10 channels per display
Number of display:
36 displays (36 groups)
Display renewal rate: 1 s

Overview display:
Number of indication channels:
Measuring values and alarm status of all channels

Information display:
Alarm summary display:
Display the list of latest 1000 alarms summary.
Jump to historical trend display by cursor pointing.
Message summary display:
Display the list of latest 450 messages and time.
Jump to historical trend display by cursor pointing.
Memory information:
Display the file list in internal memory.
Jump to historical trend display by cursor pointing.
Report information:
Display the report data in internal memory.
Modbus status:
Display the Modbus status.
Relay status:
Display the on/off status of internal switch and relay output.
Stacked bar graph display:
Display the periodic sums of report data.
Event switch status:
Display the event switch status.

Log display:
Log display types:
Login log, error log, communication log, FTP log, Web log, E-mail log, SNTP log, DHCP log, Modbus log

Tags:
Display the tag number and tag comment.
Tag number:
Number of characters:
16 characters maximum
Tag comment:
Number of characters:
32 characters maximum

Messages:
Number of characters:
32 characters maximum
Number of messages:
100 messages (including 10 free messages)
Message adding function:
Message can be added on historical display.

Other display contents:
Status display area:
Date & time (year/month/day, hour:minute:second), batch name (batch number + lot number), login user name, display name, internal memory status, status indication icon
Trend display area:
Grid lines (number of divisions selectable from 4 to 12), hour : minutes on grid, trip levels (line widths are selectable from 1, 2 and 3 pixels)

Data referencing function:
Display the retrieved data (display data or event data) from internal or external memory.
Display format:
Whole display or divided to 2 areas
Time axis operation:
Display magnification or reduction, scroll by key operation
Data searching operation:
Display the retrieved data from internal memory by specifying date and time.

Display auto scroll function:
Display group of monitor display (trend display, bargraph display and digital display) automatically changes in a preset interval (5, 10, 20, 30 s and 1 min).

LCD saver function:
The LCD backlight automatically dims or off (selectable) if no key is touched for a certain preset time (can be set from 1, 2, 5, 10, 30, and 60 min).

Display register function:
Up to 8 display types can be registered with display name.

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

Display auto return function:
The display type automatically returns to registerd display type if no key is touched for a certain preset time (can be set from 1, 2, 5, 10, 20, 30 and 60 min)
Temperature unit:
°C or °F selectable
Custom display function:
Display can be customized by lay outing display parts. Display data is saved in internal memory or external medium.
Number of customized display:
28 displays maximum (3 in internal memory and 25 in external medium)
Display part:
- General parts (digital, bar, label, tag number, tag comment, system icon, Modbus input, etc)
- Scale parts
- Trend parts
- List parts (alarm list, message list)
- Figure parts (line, rectangle, circle)

Edit function:
Select parts, grid, edit parts (move, resize, property, copy, paste, layout order change, dependency of visual property), group control, delete, save display
Custom display data:
Contents: Display contents data (for each display)
Format: Text
Output: External medium
Custom display data save/load:
Each or all custom display data file can be saved in specified directory.
Custom display data can be loaded from specified directory.

Data Saving Function

External storage medium:
Medium: CompactFlash memory card (CF card)
Format: FAT16 or FAT32
Internal memory:
Medium: Flash memory
Capacity: 400MB
Maximum number of files can be saved:
400 files (total number of display data file and event data file)
Manual saving:
Data files in internal memory can be saved manually.
Selectable form all data saving or selected data saving.
Drive: CF card or USB flash drive (only for USB option)
Automatic saving:
Display data:
Periodic saving to CF card
Event data:
In case of trigger free...Periodic saving to CF card
In case of using trigger...Save the data when sampling is finished
Media FIFO function :
Allows the oldest file to be deleted and the newest file to be saved if the free space on the CF card is insufficient (on/off selectable).
Sampling Period (data saving period):
Display data file:
Linked with the trend update rate
Event file: Linked with the specified sampling period
Event File Sampling Period:
DX3004, DX3008:
Selectable from 25, 125, 250, 500 ms, and 1, 2, 5, 10, 30, 60, 120, 300, 600, 900, 1200 and 1800 s*
DX3010, DX3020, DX3030:
Selectable from 125, 250, 500 ms, and 1, 2, 5, 10, 30, 60, 120, 300, 600, 900, 1200 and 1800 s*
*Sampling period faster than measurement interval can not be selected.
Measurement data File:
The following two file types can be created.
Event file (stores instantaneous values sampled periodically at a specified sampling period)
Display data file (stores the maximum and minimum values for each sampling period from among measured data sampled at measurement intervals)
Files can be created in the following combinations.
(a) Event file + display data file
(b) Display data file only
(c) Event file only
Data format: YOKOGAWA private format (Binary)
Maximum data size per file:
8,000,000 byte (8MB)
Data per channel:
Display data file:
Measurement data.....4 byte/data
Mathematical data.....8 byte/data
External channel data..4 byte/data
Event data file:
Measurement data.....2 byte/data
Mathematical data.....4 byte/data
External channel data..2 byte/data
Sampling time:
The sampling time per file (8MB) during manual data saving can be determined by the formula “number of data items per channel × interval of data saving (sampling period).”
This logic is explained in more detail below:
1) When handling display data files only
If we assume that the number of measuring channels is 30, the number of computing channels is 10, and the trend update rate is 30 min/div (60 sec sampling period), then:
Number of data items per channel = 8,000,000 bytes/(8 bytes(time stamp) + 30 × 4 bytes + 10 × 8 bytes) = 38,462 data items
Sampling time per file = 38,462 × 60 sec = 2,307,720 sec = approx. 26 days

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

2) When handling event files only
If we assume that the number of measuring channels is 30, the number of computing channels is 10, and the sampling period is 1 sec, then :
Number of data items per channel = 8,000,000 bytes/(8 bytes(time stamp) + 30 × 2 bytes + 10 × 4 bytes) = 74,074 data items
Sampling time per file = 74,074 × 1 sec = 74,074 sec = approx. 20 hours

3) When handling both display data files and event files
The sampling time is calculated by defining the size of data items in a display data file as 8,000,000 bytes and the size of data items in an event data file as 8,000,000 bytes. The method of calculation is the same as shown above.

Examples of Sampling Time for 1 file (8MB)*:
*If sampling time exceeds 31 days, data file is divided.

In case measurement ch = 8 ch, mathematical ch = 0 ch

Display data file (approx.)

Trend update rate (time/div)	15 s	30 s	1 min	2 min	5 min	10 min
Sampling period	0.5 s	1 s	2 s	4 s	10 s	20 s
Sampling time	27.8 h	2 days	4 days	9 days	23 days	46 days

Event data file (approx.)

Sampling period	25 ms	125 ms	0.5 s	1 s	2 s	5 s	10 s
Sampling time	2.3 h	11.6 h	46.3 h	3 days	7 days	19 days	38 days

Manual sample data:
The measuring and computing data can be saved manually to the internal memory and CF card.
Trigger: Key operation, communication command or event action function
Data format: Text
Max. number of data: 400 data (if exceeds 400 data, oldest data is overwritten)

Report data (only for MATH option):
Types: Hourly, daily, hourly + daily, daily + weekly, and daily + monthly
Data format: Text
Drive: CF card

Trigger function:
Selectable from FREE or TRIG for event data saving.
Trigger mode: Selectable from free, single or repeat trigger
Data length: Selectable from 10, 20, 30 min, 1, 2, 3, 4, 6, 8, 12 hour, 1, 2, 3, 5, 7, 10, 14, 31 day
Pre trigger: Selectable from 0, 5, 25, 50, 75, 95, 100%
Trigger source: Key operation, communication command or event action function

Display hard copy:
Trigger: Key operation, communication command or event action function
Data format: png format
Drive/output: CF card or communication interface

Data file retrieving function:
Data file in CF card or USB flash drive (only for USB option) can be retrieved and displayed.
Retrieved data file: Display data file or event data file

Saving and retrieving of configuration data:
Configuration information can be saved and retrieved as text data.
Drive: CF card or USB flash drive (only for USB option)

Alarm Function

Number of alarm levels: Up to four levels for each channel
Alarm types: High and low limits, differential high and low limits, high and low rate-of-change limits and delay high and low
Alarm delay time: 1 to 3600 s
Interval time of rate-of-change alarms: The measurement interval times 1 to 32
Display: The alarm status (type) is displayed in the digital value display area upon occurrence of an alarm. A common alarm indication is also displayed.
Alarm display color and display order can be changed by configured importance level and color.
Alarming behavior: non-hold or hold-type can be selectable for common to all channels.
Hysteresis: On/off selectable (common to measurement channels, mathematical channels or external channels)
0.0 to 5.0% of display span (or scaling span)

Outputs:
Output: Internal switch or relay output (optional)
Number of internal switch: 30 points
Internal switch action: AND/OR
Number of relay output points: 6, 12, 22 or 24 points (optional)
Relay action: Energized/deenergized, hold/non-hold, AND/OR, alarm reflash selectable.

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

Alarm no logging function:
When alarm occurs, only internal switch or relay output is activated. There are no alarm display on screen and no record on alarm summary.
On/off selectable for each channel and alarm level.

Memory:
The times of alarm occurrences/recoveries, alarm types, etc. are stored in the memory.
Up to 1000 latest alarm events are stored.

Alarm annunciator function:
Alarm display and relay output based on alarm sequence.
Alarm sequence: 3 types (ISA-A-4, ISA-A, ISA-M)
First out display function: Not available

Event action function

General: Particular action can be executed by particular event.

Number of event action:
40 actions can be set

Event list:

Event	Level/Edge	Description
Remote	Level/Edge	Action by remote control signal
Relay	Level/Edge	Action by relay operation
Internal switch	Level/Edge	Action by internal switch operation
Alarm	Level/Edge	Action by any alarm
Timer	Edge	Action by timer time up
Match time	Edge	Action by time up of match time timer
USER key	Edge	Action by USER key operation
Event level switch	Level/Edge	Action by custom display, or communication command
Event edge switch	Edge	Action by custom display, FUNC display or communication command
Alarm OFF	Level/Edge	Action by alarm OFF
Internal switch OFF	Level/Edge	Action by internal switch OFF
Relay OFF	Level/Edge	Action by Relay OFF
Level switch OFF	Level/Edge	Action by level switch OFF

Action list:

Action	Level/Edge	Description
Memory start/stop	Level	Memory start and stop
Memory start	Edge	Memory start
Memory stop	Edge	Memory stop
Event trigger	Edge	Event data sampling start
Alarm ACK	Edge	Alarm ACK
Math start/ stop	Level	Computation start and stop
Math start	Edge	Computation start
Math stop	Edge	Computation stop
Math reset	Edge	Computation reset
Manual sample	Edge	Manual sample
Snapshot	Edge	Save display image to external media
Message input	Edge	Message writing
Trend update rate change	Level	Change trend update rate
Display data save	Edge	Save currently sampled display data to internal memory as a file
Event data save	Edge	Save currently sampled event data to internal memory as a file
Relative time timer reset	Edge	Reset relative time timer
Display group change	Edge	Change to specified display group
Time adjustment	Edge	Adjust internal clock to the nearest hour
Flag	Level	Normal: "0", Event: "1"
Setting file load	Edge	Load setting file from CF card (up to 3 setting files).
Alarm display reset	Edge	Reset alarm display
Comment display	Edge	Display comment
Favorite display	Edge	Display registered favorite screen

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

Security functions*
General: Login function or key lock function can be set for each key operation or communication operation.
Key lock function:
On/off and password can be set for each operation key and FUNC operation.
Login function:
Using the login function described below, you can enter security settings on the instrument
- User name
- Password

User level and number of users:
System administrator: 5 users (all can be operated)
General user: 30 users (With user restrictions, you can set restrictions on each operation key and FUNC display operation.)
User restrictions setting: 10 kinds (for general users)

* If the /AS1 option is installed, see the advanced security functions (/AS1) specifications.

Clock
Clock: With calendar function (year of grace)
Clock accuracy:
± 10 ppm, excluding a delay (of 1 second, maximum) caused each time the power is turned on.
Time setting method:
Key operation, communication command, event action function or SNTP client function
Time adjustment method:
During memory sample:
Adjust 40 ms per second (No influence for measurement period)
During memory stop:
Adjust at a time
Time zone:
Time difference from GMT:
Settable from -1300 to 1300
Date display format:
Selectable from YYYY/MM/DD, MM/DD/YYYY, DD/MM/YYYY or DD.MM.YYYY
DST function (summer/winter time):
The time at which the daylight savings time adjustment is automatically calculated and configured.

Communication Functions
Electrical specifications:
Confirms to IEEE802.3 (DIX specification for Ethernet frames)
Connection:
Ethernet (10BASE-T)
Protocols: TCP, UDP, IP, ICMP, ARP, DHCP, HTTP, FTP, SMTP, SNTP, Modbus, DX private, EtherNet/IP

E-mail inform function:
E-mail is sent by events as below.
- Alarm occurring/alarm canceling
- Recover from power failure
- Memory end
- Storage medium error, FTP client function error
- Specified time period
- Report data time up (only for mathematical option)

POP before SMTP and SMTP authentication (PLAIN and CRAM-MD5) is available.
FTP client function:
Data file auto-transfer from DX
Transferred data file:
Display data file, event data file, report data file and display image file
FTP server function:
File transfer from DX, file elimination, directory operation and file list output are available by request from host computer.
Web server function:
Display image of DX and alarm information can be displayed on web browser.
Display the data searching display and report data of DX on web browser.
You can have a buzzer sound on the PC when an alarm occurs on the DX.
SNTP client function:
The time on DX can be synchronized to the time of a SNTP server.
SNTP server function:
The DX can operate as a SNTP server.
DHCP client function:
Network address configuration can be obtained automatically from DHCP server.
Obtained information:
IP address, subnet mask, default gateway and DNS information
Modbus client function:
Reading or writing of measurement data on other instruments are available by Modbus protocol.
Mathematical option or external input option is required to read the data from other instruments.
Modbus server function:
Output of measurement data from DX is available by Modbus protocol.
Control operation such as message or batch name writing is available.
Access control from Modbus client to register is available by IP filtering function.
Setting/measurement server function:
Operation, setting or output of measurement data are available by DX private protocol.
Maintenance/test server function:
Output connection information or network information of the Ethernet communication.
Instrument information server function:
Output instrument information such as serial number or model name of DX.

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

EtherNet/IP server function:
- Reading of measurement data or mathematical channel data
- Reading or writing of external channel data
- Reading or writing of communication input channel

Batch function

General: Data display and data management with batch name, text field function and batch comment function are available.

Batch name:

Batch name can be used as file name of display data, event data and report data.

Batch name format:

Batch number (max. 32 characters) + lot number (max. 8 characters)
Use/not use selectable for lot number, on/off selectable for auto increment function

Text field function:

Field number:

1 to 24

Field title:

Max. 20 characters

Field text:

Max. 30 characters

Batch comment function:

Batch comment is added to display data and event data.

Batch comment information:

3 comments (max. 50 characters) are available.

LOG input function

This mode allows you to measure the DC voltage input (DCV: 20 mV, 60 mV, 200mV, 2 V, 6 V, 20 V, and 50 V), convert to logarithmic scale, and display the data.

LOG Input Mode:

Selectable span range:

Same range as the DC voltage input
Span Lower must be less than Span Upper.

Selectable scale range:

1.0E-15 to 1.0E+15 (15 decades maximum)
Scale Lower must be less than Scale Upper.

Mantissa: Select two or three digits.

Unit: You can set the unit.

Alarm types in LOG input mode:

H, L, T, and t only.
Set the alarm value using a voltage.
Alarm hysteresis fixed to 0%.

Simulation Function

Display Freeze Function:

A function used to stop the updating of the time, trend, digital values, and bar graph.
The display freeze function is controlled through the event action function or communication commands.

Memory and Trend Clear Function:

A function used to clear the internal memory and the trend.
The memory and trend clear function is controlled through the event action function or communication commands.

Enabling/Disabling the Time Display:

A function used to disable the time display on the operation display.

Special Current Value Mark Function:

A function used to display the channel using two digits for the current value mark that is displayed in the scale display position on the trend/historical trend display.

Power Supply

Rated power supply:

100 to 240 VAC (automatic switching)

Allowable power supply voltage range:

90 to 132 or 180 to 264 VAC

Rated power supply frequency:

50/60 Hz (automatic switching)

Power consumption:

Supply voltage	LCD off	Normal	Max.
100 VAC	28 VA	42 VA	74 VA
240 VAC	38 VA	54 VA	100 VA

Allowable interruption time:

Less than 1 cycle of power supply frequency

Other Specifications

Memory backup :

A built-in lithium battery backs up the setup parameters (battery life: approximately 10 years at room temperature).

Insulation resistance:

Each terminal to ground terminal:

20 MΩ or greater (at 500 VDC)

Dielectric strength:

Power supply to ground terminal:

2300 VAC (50/60 Hz), 1 min

Contact output terminal to ground terminal:

1600 VAC (50/60 Hz), 1 min

Measuring input terminal to ground terminal:

1500 VAC (50/60 Hz), 1 min

Between measuring input terminals:

1000 VAC (50/60 Hz), 1 min (except for b-terminal of RTD input of DX3010, DX3020, and DX3030)

Between remote control terminal to ground terminal:

1000 VDC, 1 min

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

Safety Standards

CSA: CSA22.2 No.61010-1, CSA C22.2 No.61010-2-030
Installation category II*1, pollution degree 2*2, measurement category II*3

UL: UL61010-1, UL61010-2-030 (CSA NRTL/C)

*1: Installation Category (Overvoltage Category) II
Describes a number which defines a transient overvoltage condition. It implies the regulation for impulse withstand voltage. “II” applies to electrical equipment which is supplied from fixed installations like distribution boards.

*2: Pollution Degree
Describes the degree to which a solid, liquid, or gas which deteriorates dielectric strength or surface resistivity is adhering. “2” applies to normal indoor atmosphere. Normally, only non-conductive pollution occurs.

*3: Measurement Category II
Applies to measuring circuits connected to low voltage installation, and electrical instruments supplied with power from fixed equipment such as electric switchboards.

■ Normal Operating Conditions

Power voltage:
90 to 132 or 180 to 250 VAC
Power supply frequency:
50 Hz ±2%, 60 Hz ±2%
Ambient temperature:
0 to 50 °C
Ambient humidity:
20% to 80% RH (at 5 to 40 °C)
Vibration: 5 ≤ f < 8.4 Hz amplitude 3.5 mm (peak)
8.4 ≤ f ≤ 160 Hz acceleration 9.8 m/s2
Shock: Not acceptable
Magnetic field:
400 A/m or less (DC and 50/60 Hz)
Noise:
Normal mode (50/60 Hz):
DCV: The peak value including the signal must be less than 1.2 times the measuring range.
TC: The peak value including the signal must be less than 1.2 times the measuring thermal electromotive force.
RTD: 50 mV or less
Common mode noise voltage (50/60 Hz):
250 Vrms AC or less for all ranges
Maximum noise voltage between channels (50/60 Hz):
250 Vrms AC or less
Mounting position:
Can be inclined up to 30 deg backward. Mounting at an angle away from the perpendicular is not acceptable.
Warm-up time:
At least 30 min after power on
Installation location:
In-room
Altitude: Less than 2000 m

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

■ Standard Performance

Measuring and Recording Accuracy:

The following specifications apply to operation of the recorder under standard operation conditions.

Temperature: 23 ± 2 °C
Humidity: 55 ± 10% RH
Power supply voltage: 90 to 132 or 180 to 250 VAC
Power supply frequency: 50/60 Hz ± 1%
Warm-up time: At least 30 min.

Other ambient conditions such as vibration should not adversely affect recorder operation.

Input	Range	Measurement accuracy (digital display)		Max. resolution of digital display
		A/D integration time: 16.7ms or more	A/D integration time: 1.67ms (fast sampling mode)	
DCV	20 mV	±(0.05% of rdg + 12 digits)	±(0.1% of rdg + 40 digits)	1 µV
	60 mV	±(0.05% of rdg + 3 digits)	±(0.1% of rdg + 15 digits)	10 µV
	200 mV			10 µV
	2 V	±(0.05% of rdg + 12 digits)	±(0.1% of rdg + 40 digits)	100 µV
	6 V	±(0.05% of rdg + 3 digits)	±(0.1% of rdg + 15 digits)	1 mV
	1-5 V			1 mV
	20 V			1 mV
	50 V			10 mV
TC (Excluding RJC accuracy)	R	±(0.15% of rdg + 1°C) However, R, S: ±3.7°C at 0 to 100°C ±1.5°C at 100 to 300°C B: ±2°C at 400 to 600°C Accuracy at less than 400°C is not guaranteed.	±(0.2% of rdg + 4°C) However, R, S: ±10°C at 0 to 100°C ±5°C at 100 to 300°C B: ±7°C at 400 to 600°C Accuracy at less than 400°C is not guaranteed.	0.1°C
	S			
	B			
	K	±(0.15% of rdg + 0.7°C) However, ±(0.15% of rdg + 1°C) at -200 to -100°C	±(0.2% of rdg + 3.5°C) However, ±(0.15% of rdg + 6°C) at -200 to -100°C	
	E	±(0.15% of rdg + 0.5°C) However, ±(0.15% of rdg + 0.7°C) at -200 to -100°C	±(0.2% of rdg + 2.5°C) However, ±(0.2% of rdg + 5°C) at -200 to -100°C	
	J			
	T			
	L			
	U			
	N	±(0.15% of rdg + 0.7°C) However, ±(0.35% of rdg + 0.7°C) at -200 to 0°C Accuracy at less than -200°C is not guaranteed.	±(0.3% of rdg + 3.5°C) However, ±(0.7% of rdg + 3.5°C) at -200 to 0°C Accuracy at less than -200°C is not guaranteed.	
	W	±(0.15% of rdg + 1°C)	±(0.3% of rdg + 7°C)	
	WRe	±(0.2% of rdg + 2.5°C) However, ±4°C at 0 to 200°C	±(0.3% of rdg + 10°C) However, ±18°C at 0 to 200°C	
RTD	Pt100	±(0.15% of rdg + 0.3°C)	±(0.3% of rdg + 1.5°C)	
	JPt100			

Measurement accuracy in case of scaling (digits):
= measurement accuracy (digits) × scaling span (digits)/measurement span (digits) + 2 digits
Decimals are rounded off to the next highest number.

Reference junction compensation:
INT (internal)/EXT (external) selectable (common for all channels)

Reference junction compensation accuracy:
Types K, J, E, T, N, L, U: ± 0.7 °C
Types R, S, B*, W, WRe: ± 1.2 °C
(Above 0 °C, input terminal temperature is balanced)
* Reference junction compensation is fixed to the 0 °C.

Maximum allowable input voltage:
± 60 VDC (continuous) for all input ranges

Input resistance:
Approx. 10 MΩ or more for DCV ranges of 200 mVDC or less and TC
Approx. 1 MΩ for more than 2 VDC ranges

Input source resistance:
DCV, TC: 2 kΩ or less
RTD: 10 Ω or less per wire (The resistance of all three wires must be equal.)

Input bias current:
10 nA or less (approx. 100nA for TC range with burnout function)

Maximum common mode noise voltage:
250 Vrms AC (50/60 Hz)

Maximum noise voltage between channels:
250 Vrms AC (50/60 Hz)

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

Interference between channels:
120 dB (when the input source resistance is 500 Ω and the inputs to other channels are 60 V)
Common mode rejection ratio:
A/D integration time 20 ms:
More than 120 dB (50 Hz ± 0.1%, 500 Ω imbalance between the minus terminal and ground)
A/D integration time 16.7 ms:
More than 120 dB (60 Hz ± 0.1%, 500 Ω imbalance between the minus terminal and ground)
A/D integration time 1.67 ms:
More than 80 dB (50/60 Hz ± 0.1%, 500 Ω imbalance between the minus terminal and ground)
Normal mode rejection ratio:
A/D integration time 20 ms:
More than 40 dB (50 Hz ± 0.1%)
A/D integration time 16.7 ms:
More than 40 dB (60 Hz ± 0.1%)
A/D integration time 1.67 ms:
50/60Hz is not rejected.

■ Effects of Operating Conditions

Ambient temperature: (Only for 16.7 ms A/D integration time or more)
With temperature variation of 10 °C
DCV, TC: ± (0.1% of rdg + 0.05% of range) or less
Excluding the error of reference junction compensation
RTD: ± (0.1% of rdg + 2 digits) or less
Power supply:
With variation within 90 to 132 V and 180 to 250 VAC (50/60 Hz):
Within measurement accuracy
With variation of ± 2 Hz from rated power frequency (at 100 VAC):
Within measurement accuracy
Magnetic field:
AC (50/60 Hz) and DC 400 A/m fields:
± (0.1% of rdg + 10 digits) or less
Input source resistance:
(1) DCV range (with variation of +1 kΩ)
200 mVDC range or less:
± 10 μV or less
2 VDC range or greater:
± 0.15% of rdg or less
(2) TC range (with variation of +1 kΩ)
± 10 μV
(3) RTD range (Pt100)
With variation of 10 Ω per wire (resistance of all three wires must be equal):
± (0.1% of rdg + 1 digit) or less
With maximum difference of 40 mΩ between wires:
approx. ± 0.1 °C
Effects of Vibration
Effects from a sinusoidal vibration along all three axis at a frequency between 10 to 60 Hz and an acceleration of 0.2 m/s^2: ± (0.1% of rdg + 1 digit) or less

■ Transport and Storage Conditions

The following specifies the environmental conditions required during transportation from shipment to the start of service and during storage as well as during transportation and storage if this instrument is temporarily taken out of service.
No malfunction will occur under these conditions without serious damage, which is absolutely impossible to repair; however, calibration may be necessary to recover normal operation performance.
Ambient temperature:
-25 °C to 60 °C
Humidity: 5% to 95% RH (No condensation is allowed.)
Vibration: 10 to 60 Hz, 4.9 m/s^2 maximum
Shock: 392 m/s^2 maximum (while being packed)

■ SPECIFICATIONS OF OPTIONAL FUNCTIONS

Alarm Output Relays (/A3, /A4, /A5)
An alarm signal is output from the rear panel as a relay contact signal.
Number or output:
Select from 6, 12 and 24 points
Relay contact rating:
250 VDC/0.1 A (for resistance load), 250 VAC (50/60 Hz)/3 A
Terminal configuration:
SPDT (NO-C-NC). Energized-at-alarm/ deenergized-at-alarm,
AND/OR, and hold/non-hold actions are selectable.

Serial Communication Interface (/C2, /C3)
Connection:
EIA RS-232 (/C2) or RS-422A/485 (/C3)
Protocols: DX private protocol, Modbus(master/ slave) protocol
Synchronization method:
Start-stop asynchronous transmission
Connection method (RS-422A/485):
4-wire half-duplex multi-drop connection (1 : N, N = 1 to 31)
Transmission speed:
1200, 2400, 4800, 9600, 19200 or 38400 bps
Data length:
7 or 8 bits
Stop bit: 1 bit
Parity: Odd, even, or none
Communication distance (RS-422A/485):
Up to 1.2 km
Communication mode:
ASCII for input/output for control and setting
ASCII or binary for output of measured data
Setting/measurement server function:
Operation, setting or output of measurement data are available by DX private protocol.

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

Modbus communication:
Reading or writing of measurement data on other instruments are available by Modbus protocol.
Mathematical function option or external input option is needed to read measurement data from other instruments.
Control operation such as message or batch name writing is available (Modbus slave function).
Operation mode:
RTU MASTER or RTU SLAVE
Modbus master command number:
1 to 16

Fail/Status Output (/F1)

The relay contact output on the rear panel indicates the occurrence of CPU failure or selected status. You can select the contents output to the two relay output signals.

FAIL output relay:
The relay contact output on the rear panel indicates the occurrence of CPU failure.
Relay operation: CPU normal: Energized, CPU failure: Deenergized

Status output relay:
The relay contact output on the rear panel indicates the occurrence of selected status
Relay operation: Status detection: Energized

Status	Description
Memory status	Relay is energized when internal memory or external storage media is in the following conditions: Abnormality in the internal memory When automatic saving of settings to the external storage media is ON • When the remaining space on the external storage medium reaches 10%. • When an abnormality occurs with the external storage medium, and auto save fails • When the external storage medium is not inserted, operation is same as when automatic saving of settings to the external storage media is Off When automatic saving of settings to the external storage media is Off • When the remaining space on the internal memory reaches 10% • When the number of data file which is not saved to external storage media exceeds 390 *Not including USB memory connected to the instrument.
Measurement Failure	Relay energized upon A/D converter abnormality or burnout detection
Comm. failure	Relay energized when communication error occurs in the Modbus master
Memory stop	Relay energized upon memory stop
Alarm	Relay energized upon any alarm occurs

Relay contact rating:
250 VDC/0.1 A (for resistance load), 250 VAC (50/60 Hz)/3A

Fail & Alarm Output Relays 22 points (/F2)

Combination of “Fail/Memory end output function” and “Alarm output relays 22 points”.

Mathematical Functions (/M1)

Used for calculating data, displaying trends and digital values, and recording calculated data assigned to channels.
Channel assignable to calculated data:
DX3004, DX3008:
Up to 24 channels (101 to 124)
DX3010, DX3020, DX3030:
Up to 60 channels (101 to 160)
Max. character length of expression:
120 characters
Operation:
General arithmetic operations:
Four arithmetic operations, square root, absolute, common logarithm, natural logarithm, exponential, power, relational operations (>, ≥, <, ≤, =, ≠), logic operations (AND, OR, NOT, XOR)
Statistical operations:
TLOG (Average, maximum, minimum, summation and P-P value of time series data)
CLOG (Average, maximum, minimum, summation and P-P value of channel series data)
Special operations:
PRE (Previous data)
HOLD(a):b (Hold data of “b” in case of “a” is not “0”)
RESET(a):b (Reset data of “b” and restart in case of “a” is not “0”)
CARRY(a):b (If “b” exceeds “a”, “b-a” becomes computation results)
Conditional operation:
[a?b:c] (Execute “b” in case of “a” is not “0”, or execute “c” in case of “a” is “0”)
Constant: Up to 60 constants (K01 to K60)
Digital data input via communication:
Up to 60 data (C01 to C60)
External input:
Up to 240 data (201 to 440) (only for external input option)
Remote status input:
Remote input status (0/1) can be used in mathematical expression
Up to 8 inputs (D01 to D08)
Status input:
Internal switch status (S01 to S30), relay status (I01 to I36), memory sampling status (M01 to M12) and flag status (F01 to F08) can be used in mathematical expression
Memory status:
-Memory sampling status (M01 to M12) can be used in mathematical expression
Report functions:
Number of report channels:
DX3004, DX3008: up to 24 channels
DX3010, DX3020, DX3030: up to 60 channels
Report type:
Hourly, daily, hourly + daily, daily +weekly and daily + monthly

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

Operation:
Max. 4 types are selectable from average, maximum, minimum, instantaneous and summation
Data format:
TEXT
Excel spread sheet template function:
reports can be automatically created in XML spread sheet format according to a predefined spread sheet template

Long term rolling average:
Computation interval:
1, 2, 3, 4, 5, 6, 10, 12, 15, 20, 30 sec., 1, 2, 3, 4, 5, 6, 10, 12, 15, 20, 30, 60 min
Number of sampling:
2 to 1500

Cu10, Cu25 RTD Input /3 leg isolated RTD Input(/N1)

This option allows Cu10 and Cu25 inputs to be added to the standard input types.
A, B, b legs are of isolated input type for DX3010, DX3020, and DX3030.

Input type Measuring range:
The following specifications apply to operation of the recorder under standard operation conditions.
Temperature:
23 ± 2 °C
Humidity:
55 ± 10% RH
Power supply voltage:
90 to 132 or 180 to 250 VAC
Power supply frequency:
50/60 Hz ± 1%
Warm-up time:
At least 30 min.
Other ambient conditions such as vibration should not adversely affect recorder operation.

Input	Type	Measurement range	Accuracy guaranteed range	Measurement accuracy		Max. resolution of digital display
				A/D integration time: 16.7 ms or more	A/D integration time: 1.67ms (Fast sampling mode)	
RTD *1	Cu10 (GE)	-200 to 300°C	-70 to 170°C	±(0.4% of rdg + 1.0°C)	±(0.8% of rdg + 5.0°C) RTD	0.1°C
	Cu10 (L&N)		-75 to 150°C			
	Cu10 (WEED)		-200 to 260°C			
	Cu10 (BAILEY)		-200 to 300°C			
	Cu10:α =0.00392 at 20°C					
	Cu10:α =0.00393 at 20°C					
	Cu25:α =0.00425 at 0°C			±(0.3% of rdg + 0.8°C)	±(0.5% of rdg + 2.0°C)	

*1 Measuring current: i = 1mA

Input source resistance:
1 Ω or less per wire (The resistance of all three wires must be equal.)
Ambient temperature: (Only for 16.7 ms A/D integration time or more)
With temperature variation of 10 °C
± (0.2% of rdg + 2 digits) or less
Input source resistance:
With variation of 1 Ω per wire (resistance of all three wires must be equal):
± (0.1% of rdg + 1 digit) or less
With maximum difference of 40 mΩ between wires:
approx. ± 1 °C

3 legs Isolated RTD Input (/N2)

A, B, b legs are of isolated input type.
* Can be specified only for DX3010, DX3020, and DX3030. A, B, b legs of DX3004 and DX3008 are isolated as standard.

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

Extended Input Types (/N3)

This option allows extra inputs types to be added to the standard input types.

Input type Measuring range:

The following specifications apply to operation of the recorder under standard operation conditions.

Temperature: 23 ± 2 °C
Humidity: 55 ± 10% RH
Power supply voltage: 90 to 132 or 180 to 250 VAC
Power supply frequency: 50/60 Hz ± 1%
Warm-up time: At least 30 min.
Other ambient conditions such as vibration should not adversely affect recorder operation.

Input	Type	Measurement range	Measurement accuracy		Max. resolution of digital display
			A/D integration time: 16.7 ms or more	A/D integration time: 1.67ms (Fast sampling mode)	
TC	Kp vs Au7Fe	0.0 to 300.0K	Within ±4.5K at 0 to 20K Within ±2.5K at 20 to 300K	Within ±13.5K at 0 to 20K Within ±7.5K at 20 to 300K	0.1 K
	PLATINEL	0.0 to 1400.0°C	±(0.25% of rdg+2.3°C)	±(0.25% of rdg+8.0°C)	0.1°C
	PR40-20	0.0 to 1900.0°C	Accuracy is not guaranteed at 0 to 450°C ±(0.9% of rdg+3.2°C) at 450 to 750°C ±(0.9% of rdg+1.3°C) at 750 to 1100°C ±(0.9% of rdg+0.4°C) at 1100 to 1900°C	Accuracy is not guaranteed at 0 to 450°C ±(0.9% of rdg+15.0°C) at 450 to 750°C ±(0.9% of rdg+6.0°C) at 750 to 1100°C ±(0.9% of rdg+3.0°C) at 1100 to 1900°C	
	NiNiMo	0.0 to 1310.0°C	±(0.25% of rdg+0.7°C)	±(0.5% of rdg+3.5°C)	
	W/WRe	0.0 to 2400.0°C	±15.0°C at 0 to 400°C ±(0.2%of rdg+2.0°C) at 400 to 2400°C	±30.0°C at 0 to 400°C ±(0.4%of rdg+4.0°C) at 400 to 2400°C	
	TypeN(AWG14)	0.0 to 1300.0°C	±(0.2% of rdg+1.3°C)	±(0.5% of rdg+7.0°C)	
	XK GOST	-200.0 to 600.0°C	±(0.25% of rdg +0.8°C) ±(0.25% of rdg +1.0°C) at -200 to -100°C	±(0.5% of rdg +4.0°C) ±(0.5% of rdg +5.0°C) at -200 to -100°C	
RTD *1	Pt50	-200.0 to 550.0°C	±(0.3% of rdg+0.6°C)	±(0.6% of rdg+3.0°C)	
	Ni100(SAMA)	-200.0 to 250.0°C	±(0.15% of rdg+0.4°C)	±(0.3% of rdg+2.0°C)	
	Ni100(DIN)	-60.0 to 180.0°C	±(0.15% of rdg+0.4°C)	±(0.3%of rdg+2.0°C)	
	Ni120	-70.0 to 200.0°C	±(0.15% of rdg+0.4°C)	±(0.3% of rdg+2.0°C)	
	J263*B	0.0 to 300.0 K	Within ±3.0K at 0 to 40K Within ±1.0K at 40 to 300K	Within ±9.0K at 0 to 40K Within ±3.0K at 40 to 300K	0.1 K
	Cu53	-200.0~550.0°C	±(0.3% of rdg +0.8°C)	±(0.3% of rdg+4.0°C)	0.1°C
	Cu100	-50.0 to 150.0°C	±(0.2% of rdg+1.0°C)	±(0.4% of rdg+5.0°C)	
	Pt25	-200.0 to 550.0°C	±(0.15% of rdg +0.6°C)	±(0.3% of rdg +3.0°C)	
	Pt46 GOST	-200.0 to 550.0°C	±(0.3% of rdg +0.8°C)	±(0.6% of rdg +4.0°C)	
	Pt100 GOST	-200.0 to 600.0°C	±(0.15% of rdg +0.3°C)	±(0.3% of rdg +1.5°C)	
	Cu10 GOST	-200.0 to 200.0°C	±(1.5% of rdg+3.0°C)	±(3.0% of rdg +15.0°C)	
	Cu50 GOST	-200.0 to 200.0°C	±(0.4% of rdg +0.5°C)	±(0.8% of rdg +2.5°C)	
	Cu100 GOST	-200.0 to 200.0°C	±(0.15% of rdg +0.3°C)	±(0.3% of rdg +1.5°C)	
	Pt200(WEED)	-100.0 to 450.0°C	±(0.3% of rdg +0.6°C)	±(0.6% of rdg +3.0°C)	

*1 Measuring current: i = 1mA

Input source resistance:
TC: 2 kΩ or less
RTD: 1 Ω or less per wire (The resistance of all three wires must be equal.)

Ambient temperature: (Only for 16.7 ms A/D integration time or more)

With temperature variation of 10 °C
TC: ± (0.1% of rdg + 0.05% of range) or less Excluding the error of reference junction compensation.
RTD: ± (0.2% of rdg + 2 digits) or less

Input source resistance:

(1) TC range (with variation of + 1 kΩ)
±10 μV

(2) RTD range

With variation of 1 Ω per wire (resistance of all three wires must be equal):
± (0.1% of rdg + 1 digit) or less

With maximum difference of 100 mΩ between wires:
approx. ± 1 °C

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

Remote Control (/R1)

This option allows eight functions to be controlled remotely by a contact input.
Please refer the part of “Event action function” for functions to be controlled.

24 VDC transmitter power supply (/TPS4, /TPS8)

Output voltage:
22.8 to 25.2 VDC (rated load current)
Rated output current:
4 to 20 mADC
Max. output current:
25 mADC (current to guard operation against overcurrent: approx. 68 mADC)
Allowable conductor resistance:
RL ≤ (17.8 - transmitter minimum operation voltage)/0.02 A (not include drop voltage with load shunt resistance)
Max. length of wiring:
2 km (CEV cable)
Insulation resistance:
output terminal to grand terminal more than 20 MΩ (500 VDC)
Dielectric strength:
Output terminal to grand terminal:
500 VAC (50/60 Hz, I = 10 mA), 1 min
Between output terminal:
500 VAC (50/60 Hz, I = 10 mA), 1 min

USB interface (/USB1)

USB interface specification:
Based on Rev1.1, host function
Number of ports:
2 ports (Front and rear panel)
Power supply:
5V, 500mA (for each port)*1
Available USB devices:
Keyboard: 104/89 keyboard (US) based on USB HID Class Ver.1.1
External medium:
USB flash drive (some of USB flash drives may not be supported by DXAdvanced)
Barcode reader:
Interface based on USB HID Class Ver.1.1 and supports standard US keyboard

*1: For low powered devices (bus power < 100 mA):
5V ± 5%
For high powered devices (bus power < 500 mA):
5V ± 10%
Devices which need more than 500 mA total bus power for 2 ports can not be connected at the same time.

Calibration correction function (/CC1)

Corrects the measurement value of each channel using segment linearizer approximation.
Number of segment points:
2 to 16
Calibration correction control function:
You can specify how calibration correction settings are periodically performed

External input function (/MC1)

Digital input channels via communication or Modbus master function are extended to input data from other instruments*.
Number of external input channels:
Up to 240 channels (channel number: 201 to 440)
* Only for DX3010, DX3020, and DX3030
* Fast sampling mode is not available with external input function option.

Multi-batch functions (/BT2)

This option allows to start/stop the independent data file for each batch and creating independent data file*.
* Only for DX3010, DX3020, and DX3030.
* Fast sampling mode is not available when the multi-batch function is being used.

Number of batches:
2 to 12
Independent operation for each batch:
Memory start/stop, math reset, writing message
Common operation for all batches:
Math start/stop, report start/stop, manual sample, setting data save/load
Measurement interval:
Only normal mode (fast sampling mode is not available), 1 s fastest (common for all batches)
Data type:
Display data file or event data file only. Trigger mode is not available for event data file.
Data saving period:
Common for all batches
Data file:
Each display/event data file is created for each batch
Number of group:
12 groups maximum for each batch
10 channels maximum for each group
Number of timer and match time timer:
12 timers maximum
Independent settings for each batch:
Group setting, trip line setting, file header setting, data file name setting, text field setting, batch number setting, lot number setting

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

Advanced security functions (/AS1)

Security and electronic record/signature functions have been added that are compliant with the USA's FDA title 21 CFR Part 11.

Data anti-tamper function:
Settings and measured data are saved as encrypted binary files.

Data type:
Only for display or event
Trigger mode is not possible with event data.

Login function:
Using the login function described below, you can enter security settings on the instrument
- User name
- Password
- User ID (depend on setting)

User level and number of users:

System administrator:	5 users (all can be operated)
General user:	90 users (With user restrictions, you can set restrictions on performing operations and sign authority .)
User restrictions setting:	10 kinds (for general users)

Password expiration time:
select form Off, 1month, 3 month, 6month

Password control function:
Logins are verified by a Kerberos authentication server* (only user name and password)
Encryption method:
AES128-CTS-HMAC-SHA1-96
AES256-CTS-HMAC-SHA1-96
ARCFOUR-HMAC-MD5
Pre-Auth function: use
* The function has confirmed compatibility with Windows Server2003 SP2/Windows Server2008 SP2 Active Directory

Signature function:
After checking data that has finished being recorded, you can add three levels of electronic signature, select a pass/fail, and enter comments (32 characters maximum)

Audit trail function:
The operation log, the settings change log and the settings file when the change was made are saved.

Individual alarm ACK function:
Alarm display and relay output can be cancelled on individual alarms
ACK can be performed in the overview display

Extended alarm delay time:
Alarm delay times of up to 24 hours can be set

■ APPLICATION SOFTWARE

DAQSTANDARD

Operating environment

OS:	Windows Vista (Home Premium SP2, Business SP2)*	
	* Except for 64-bits editions	
	Windows 7 (Home Premium SP1 32-bit and 64-bit editions, Professional SP1 32-bit and 64-bit editions)	
	Windows 8.1 (Update 32-bit and 64-bit editions (Supports the desktop mode), Pro Update 32-bit and 64-bit editions (Supports the desktop mode))	
Processor and main memory		
Vista:	Intel Pentium 4, 3GHz or faster x64 or x86, 2GB or more	
7/8.1:	32-bit edition	Intel Pentium 4, 3GHz or faster x64 or x86, 2GB or more
	64-bit edition	Intel x64 processor that is equivalent to Intel Pentium 4, 3 GHz or faster, 2GB or more
Hard disk:	100MB or more of free space	
Display:	A video card that is recommended for the OS and a display that is supported by the OS, has a resolution of 1024 × 768 or higher, and that can show 65,536 colors (16-bit, high color) or more.	

Configuration software:

Setting mode:
Configuration of setting mode and basic setting mode

Configuration via communication:
Configuration of setting mode and basic setting mode without communication configuration (ex. IP address)

Data viewer software:

Number of display channels:
32 channels per group, 50 groups maximum

Viewer function
Waveform display, digital display, circular display, list display, report display, operation log display etc.

Signature function:
Three levels of electronic signature, select a pass/fail, and comments (32 characters maximum) can be inserted on the currently displayed data file
*Applying electronic signatures to data files created using the password management function requires a network that can connect with the Kerberos authentication server set on the main unit.

Data conversion:
File conversion to ASCII, Lotus 1-2-3 or MS-Excel format

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

DAQStudio (optional)

Custom display builder software

Operating environment

OS: Windows Vista (Home Premium SP2, Business SP2)*
* Except for 64-bits editions
Windows 7 (Home Premium SP1 32-bit and 64-bit editions, Professional SP1 32-bit and 64-bit editions)
Windows 8.1 (Update 32-bit and 64-bit editions, Pro Update 32-bit and 64-bit editions)
Windows 10 (Home 32-bit and 64-bit editions, Pro 32-bit and 64-bit editions)

Processor

Vista: Intel Pentium 4, 3GHz or faster x64 or x86 processor

7/8.1/10: 32-bit edition: Intel Pentium 4, 3GHz or faster x64 or x86 processor
64-bit edition: Intel x64 processor that is equivalent to Intel Pentium 4, 3 GHz or faster

Memory: 2 GB or more (Windows Vista/7/8.1/10)

Hard disk: 100MB or more of free space

Display: A video card that is recommended for the OS and a display that is supported by the OS, has a resolution of 1024 × 68 or higher, and that can show 65,536 colors (16-bit, high color) or more.

General functions

(1) Send and receive the parts layout data of the custom display (via Ethernet or CF card).
(2) Display the custom screens, create new custom display and edit.
(3) Save and load the file of configured or edited custom display data.

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

■ MODEL AND SUFFIX CODES

Model code	Suffix code	Optional code	Description
DX3004			4ch, 125ms (Fast sampling mode: 25ms)
DX3008			8ch, 125ms (Fast sampling mode: 25ms)
DX3010			10ch, 1s (Fast sampling mode: 125ms)
DX3020			20ch, 1s (Fast sampling mode: 125ms)
DX3030			30ch, 1s (Fast sampling mode: 125ms)
Internal memory	–3		400MB
External media	–4		CF card (with media)
Display language	–2		English/German/French, degF, DST(summer/winter time)
Options		/A3	Alarm output 6 points *1
		/A4	Alarm output 12 points *1 *7
		/A5	Alarm output 24 points *1 *2 *6
		/C2	RS-232 interface *3
		/C3	RS-422A/485 interface *3
		/F1	FAIL/Status output *2 *4 *7
		/F2	FAIL + Alarm output 22 points *1 *4 *6
		/M1	Mathematical functions
		/N1	Cu10,Cu25 RTD input/3 leg isolated RTD
		/N2	3 leg isolated RTD *5
		/N3	Extended input type (PR40-20, Pt50, etc.)
		/R1	Remote control
		/TPS4	24VDC transmitter power supply (4 loops) *6
		/TPS8	24VDC transmitter power supply (8 loops) *6 *7
		/USB1	USB interface
		/CC1	Calibration correction function
		/MC1	External input function *8
		/BT2	Multi-batch functions*9
		/AS1	Advanced security functions

*1 /A3, /A4, /A5, /F2 cannot be specified together.
*2 /A5 and /F1 cannot be specified together.
*3 /C2 and /C3 cannot be specified together.
*4 /F1 and /F2 cannot be specified together.
*5 /N2 can be specified for only DX3010, DX3020, and DX3030.
*6 /TPS4, /TPS8, /A5 and /F2 cannot be specified together.
*7 In case that /TPS8 is specified, combination of /A4/F1 cannot be specified together.
*8 /MC1 can be specified for only DX3010, DX3020, and DX3030.
*9 /BT2 can be specified for only DX3010, DX3020, and DX3030

Application Software

Model code	Description	O S
DXA120-S2*	DAQSTANDARD software	Windows Vista/7/8.1
DXA170	DAQStudio software (optional)	Windows Vista/7/8.1/10
DXA250	DAQManager (optional)	Windows Vista/7

* Special version for the DX3000.

■ STANDARD ACCESSORIES

Product	Qty
Mounting brackets	2
User's Manual	1
DAQSTANDARD software (CD)	1
CF card (128MB)	1

The electronic manual (CD, part no. B8706ZZ) is available for purchase. Please contact your nearest YOKOGAWA dealer for details.


■ OPTIONAL ACCESSORIES

Product	Model code (part number)	Specification
Shunt resister (for M4 screw input terminal)	415920	250 Ω±0.1%
	415921	100 Ω±0.1%
	415922	10 Ω±0.1%
CF card adapter	772090	–
CF card	772093	512 MB
	772094	1 GB
	772095	2 GB
Mounting bracket	B9900BX	–

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation


■ DIMENSIONS


Ddimensions

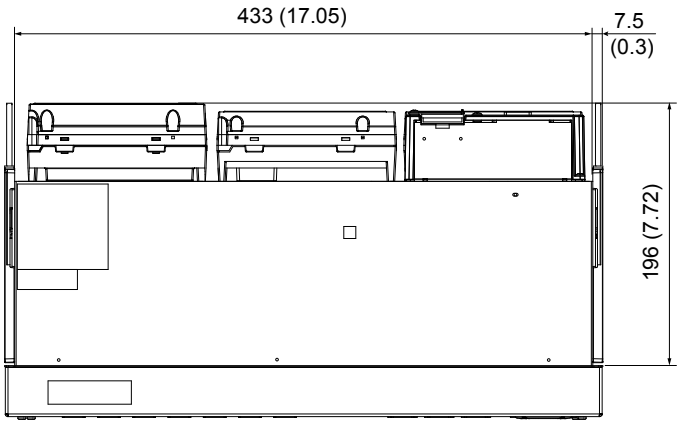



Panel cut dimensions

Unit: mm
(approx. inch)

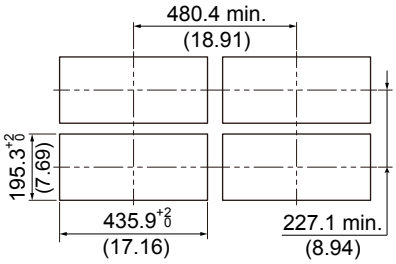

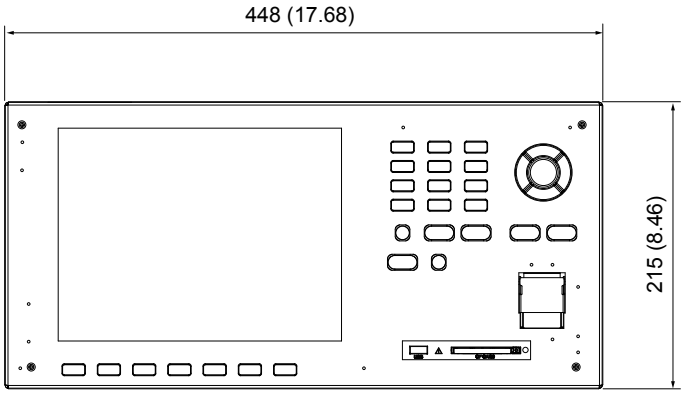

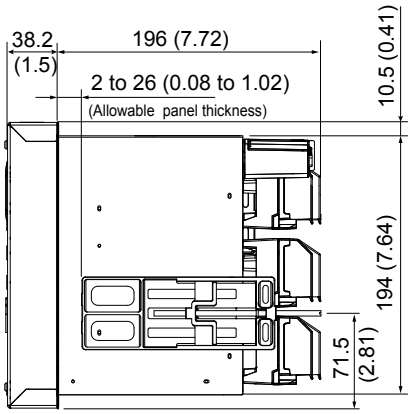


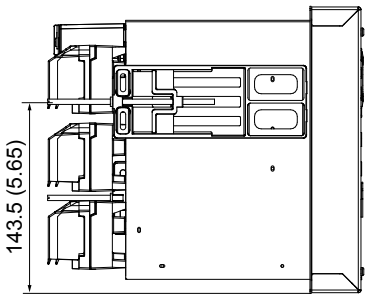


Unless otherwise specified, tolerance is ±3% (however, tolerance is ±0.3 mm when below 10 mm).

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation


Rear View

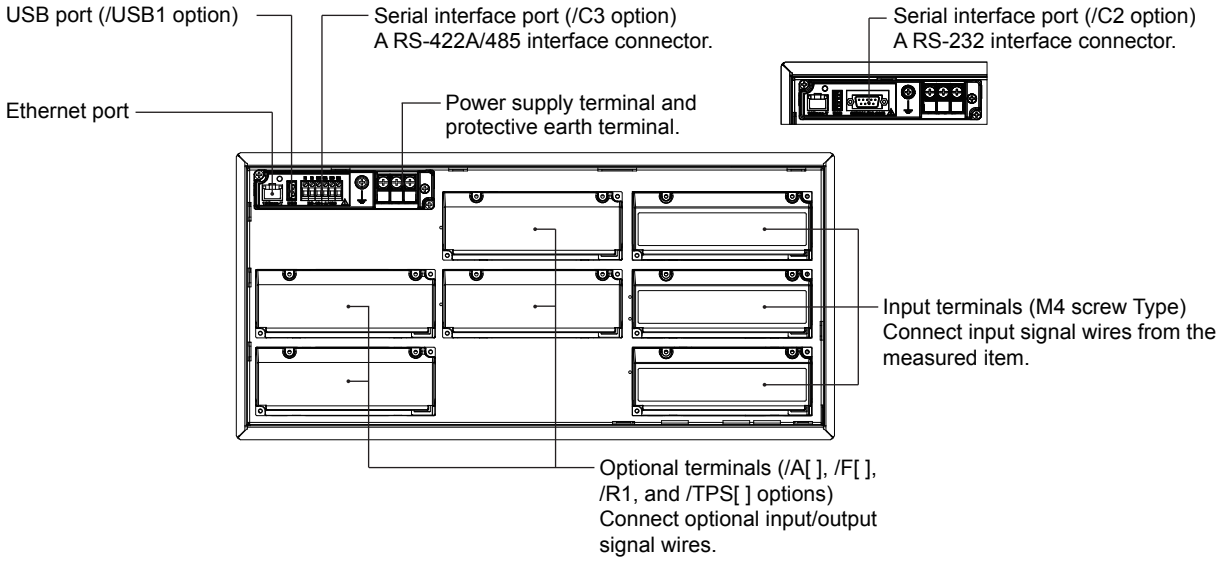


Power Supply Terminal



RS-422-A/485 Terminal



RS-232 Terminal




1	N.C.
2	RD
3	SD
4	N.C.
5	SG
6	N.C.
7	RS
8	CS
9	N.C.

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation
Subject to change without notice.


Input Terminals

M4 Screw Terminals


DX3004, DX3008

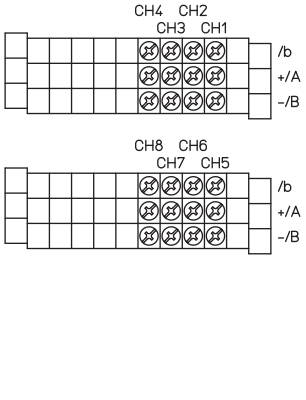

DX3010, DX3020, DX3030

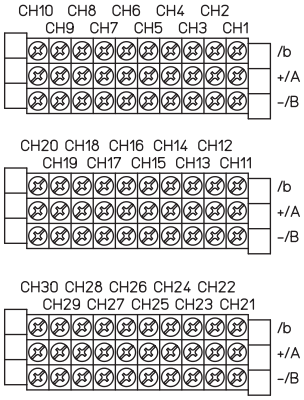

Option Terminals

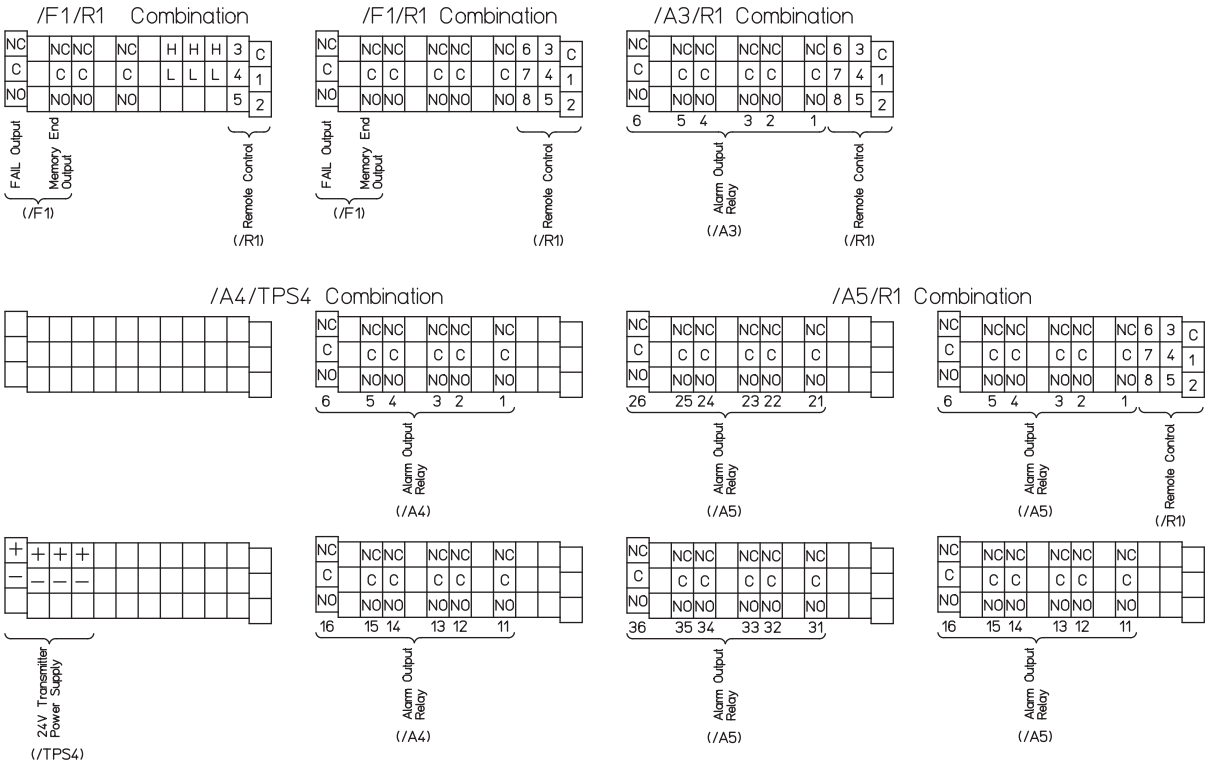

The TCP/IP software used in this product and the document for that TCP/IP software are based in part on BSD networking software, Release 1 licensed from The Regents of the University of California.

- Daqstation, DXAdvanced and DAQstudio are registered trademark of Yokogawa Electric Corporation.
- Microsoft, MS and Windows are registered trademarks of Microsoft Corporation USA.
- Lotus and 1-2-3 are registered trademark of Lotus Development Corporation.
- Pentium are registered trademarks of Intel Corporation.
- Modbus is a registered trademark of AEG Schneider.
- EtherNet/IP is a trademark of ODVA (Open DeviceNet Vendor Association).
- Other company and/or product names are registered trademark of their manufactures.

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation
Subject to change without notice.