


InteliGen 1000 SC

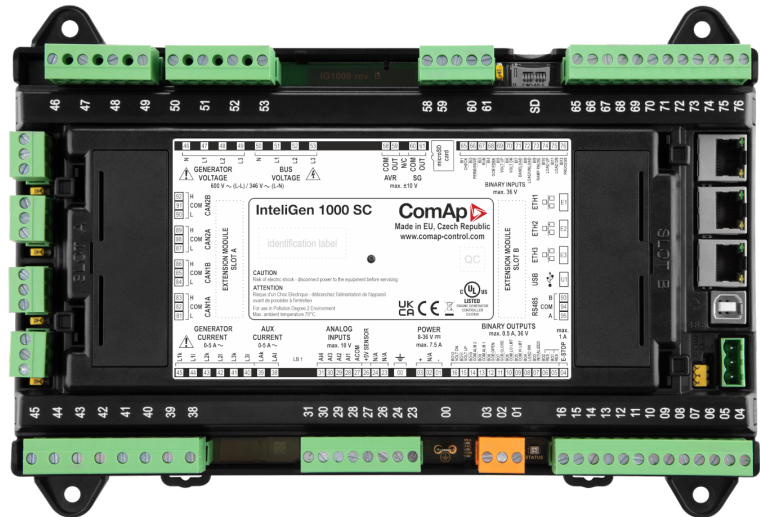

Order code: IG31000SCBB

Datasheet

Generator synchronizer and load sharing controller

Product description

The InteliGen 1000 SC is a state-of-the-art paralleling controller for synchronization as well as load/var control. This controller is intended for applications where system control is driven either from panel switches or from an upper level device such as a system PLC. In addition, this controller can communicate with an engine ECU to read engine specific values and providing generator protections if required. The InteliGen 1000 SC is simple to configure and operate which will reduce engineering and commissioning times.

Key benefits

- **Great flexibility** for the most complex applications
 - » Large in-built PLC interpreter, user-defined protections and parameters and easy extension via CAN modules and SW key features
- **Ready for mission critical** installations
 - » Inter-controller communication and controller redundancy
- **Communication capabilities and protocols**
 - » USB, 4 CAN ports, 3 ethernet ports, RS485
 - » Modbus Client/Server over RTU/TCP, SNMP v1, v2c and v3, J1939
- **Cyber security by design** to protect your business
 - » Meeting requirements of ISA 62443 level 2-3
- **Controlled by upper level systems**
 - » Via binary signals or Modbus RTU/TCP communication

Key features

- **CAN FD communication protocol** enabling cooperation with up to 64 gen-sets/mains/tie controllers



- **State of the art AC accuracy measurements** to participate on primary frequency control mechanism, grid balancing and demand response projects
- **Hot-swap redundancy** enabling a redundant unit to take over in case the primary controller fails, helping to minimize solution downtime*
- **CAN bus redundancy** ensuring that a redundant CAN line be created and take over in case of CAN failure
- **Multi ECU** (Electronic Control Unit) for communication with more independent J1939 devices such as engine ECUs, digital AVRs, breakers, etc.
- In-built **CAN bus logger and event-based history** for easy and fast troubleshooting
- **Remote connection and monitoring**
 - » **AirGate 2.0**—easy connection to your equipment remotely, without worrying about your asset's IP address
 - » **WebSupervisor**—the cloud-based tool for fleet monitoring

Application overview



*Extended feature (SW key required)

Terminals and dimensions

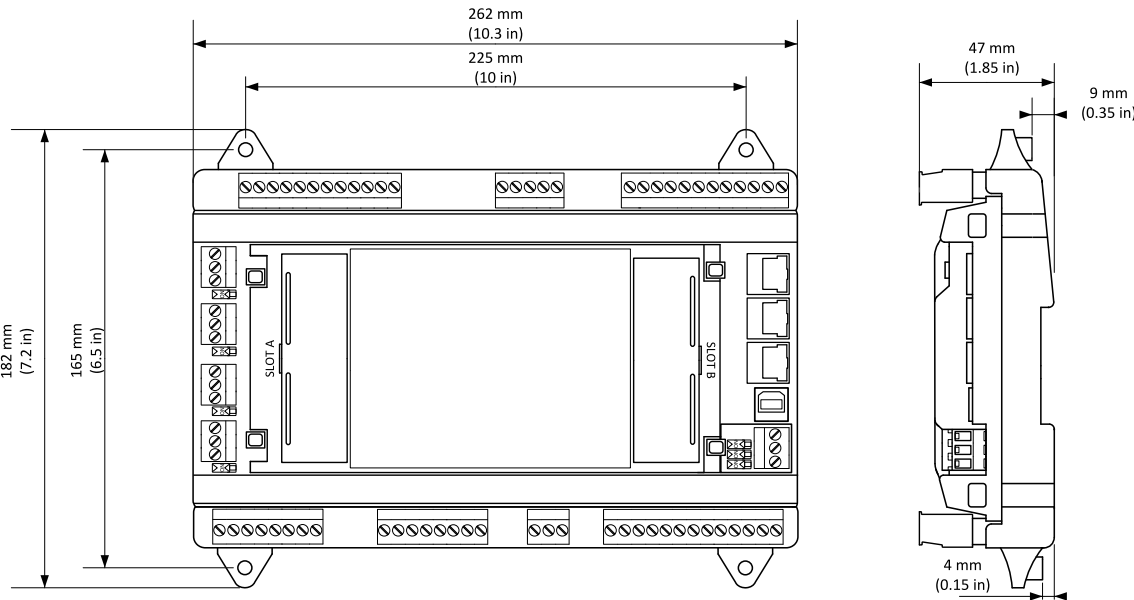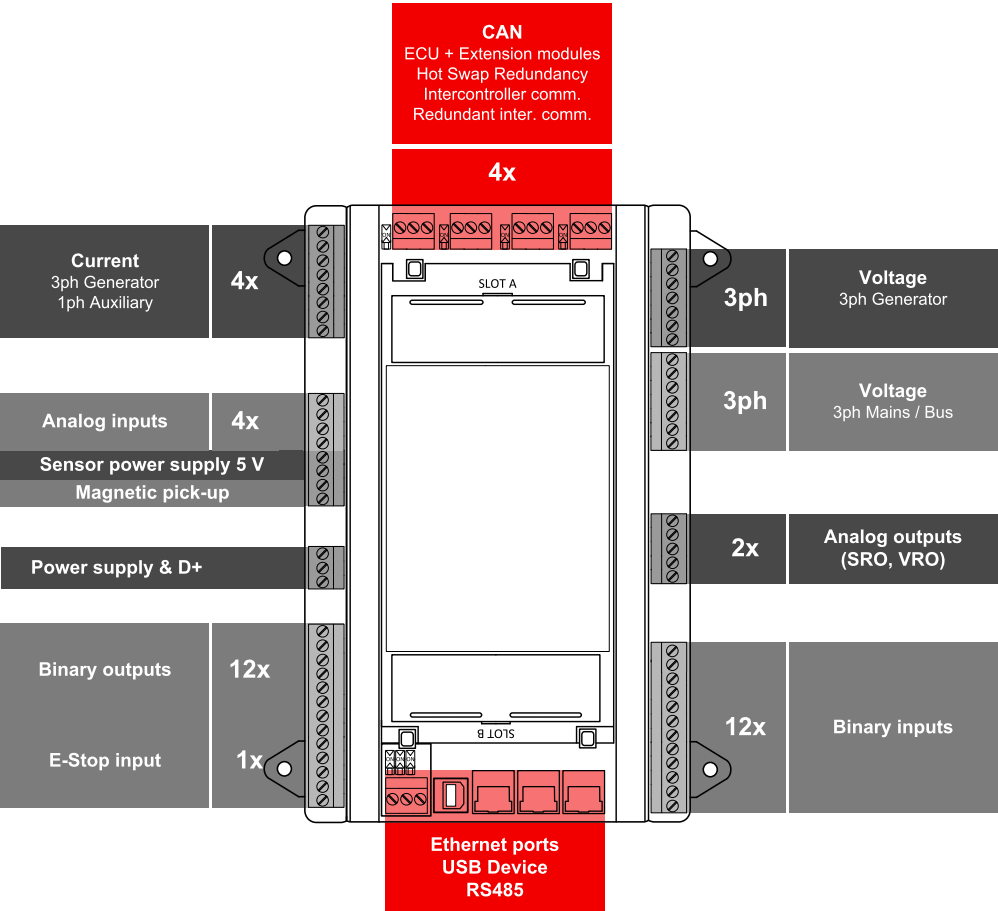

Technical data

Power supply

Power supply range	8-36 V DC
Power consumption	16 W
RTC battery	Replaceable, type CR1632 3V
Fusing power	8 A
Consumption	2.5 A Controller + 10 x 0.5 A BOUts @ 8 V
Fusing E-STOP	2 A
Max. Heat Dissipation	16 W

Operating conditions

Operating temperature	-40 °C to +70 °C
Storage temperature	-40 °C to +80 °C
Operating humidity (norm 60068-2-30)	25/55°C, 48hours, 95 % non-condensing (EN 60068-2-30)
Protection degree (enclosure)	IP20
Vibration	5-25 Hz, ± 1.6 mm 25-100 Hz, a = 4 g
Shocks	a = 500 m/s ²
Surrounding air temperature rating 70 °C.	
Suitable for pollution degree 2.	

E-Stop

Physically disconnects BO 1 & BO 2 from power supply.

Binary inputs

Number	12, non-isolated
Close/Open indication	0-2 V DC close contact 6-36 V DC open contact
Configurable	Pull-up / Pull-down
Pulse input	Bin 9 and 10 max. 50 Hz

Binary outputs

Number	12, non-isolated
Max. current	0.5 A
Switching to	Positive supply terminal

DC Analog inputs

Number	4, switchable (R/U/I)
Range	R = 0-10000 Ω; U = 0-10 V; I = 0-20 mA
Accuracy	R: 2 % from value for 0-250 Ω R: 4 % from value for 250-2500 Ω R: 6 % from value for 5000-10000 Ω U: 1 % from value ±100 mV I: 1 % from value ±200 uA

Voltage regulator output

Protection	Reinforced isolation
Type	Switchable: U ±10 V, I ±20 mA, PWM: 0 V/5 V
Accuracy	U: 1 % from value ±100 mV I: 1 % from value ±200 uA

Speed governor output

Protection	Basic isolation
Type	Switchable: U ±10 V, I ±20 mA, PWM: 0 V/5 V
Accuracy	U: 1 % from value ±100 mV I: 1 % from value ±200 uA

AC Current measurement

Measurement inputs	3 phase Generator current 1 phase Mains current (Aux current)
Measurement range	1 A / 5 A
Maximum continuous current	2 A / 10 A
Allowed overload	18 A for 15 sec.
Accuracy	±3 mA / ±15 mA for 0.0 to 0.4 A / 0.0 to 2.0 A 0.75 % of value for 0.4 to 1.0 A / 2.0 to 5.0 A
Frequency range	33-67 Hz (accuracy 0.002 %)
Sampling frequency	6.4kHz (50Hz) / 7.68kHz (60Hz)
Input impedance	< 0.1 Ω

AC Voltage measurement

Measurement inputs	3 phase Generator voltage 3 phase Mains voltage
Measurement range	Nominal: 115 V L-N / 200 V L-L suitable also for VT output, VT not present Maximal: 144 V L-N / 249 V L-L Nominal: 230 V L-N / 400 V L-L Maximal: 289 V L-N / 500 V L-L Nominal (UL, cUL): 347 V L-N / 600 V L-L Maximal: 433 V L-N / 750 V L-L
Accuracy	0.25 %
Frequency range	33-67 Hz (accuracy 0.002 %)
Sampling frequency	6.4kHz (50Hz) 7.68kHz (60Hz)
Input impedance	0.68 MΩ L-L, 0.34 MΩ L-N
Upper-harmonics filtering	Active Low-Pass filter Cutoff frequency 3100Hz (-3dB)
Measurement category CAT III, overvoltage category III	

Communications

USB Device	Basic isolation, USB type B
RS 485	Basic isolation
ETH1 / ETH2 / ETH3	10/100 Mbit
CAN1A / CAN2A CAN1B / CAN2B	Basic isolation, nominal impedance 120 Ω CAN1 data rate: 500/250/50 kbps CAN2 data rate: 2000/1000/400/250/125/50 kbps
Protocols	Modbus RTU/TCP SNMP v1/v2c/v3 J1939

Weight

Controller / Package	750 g / 920 g
----------------------	---------------

Available remote displays

Product	Description	Order code
InteliVision 5.2	5" TFT external display with 800x480 px resolution.	RD2IV5BXBAA
InteliVision 10Touch	10.1" display with pre-installed InteliSCADA - Display Pro+.	RD1IV10TBPF
InteliVision 1050	New 10.1" industrial panel PC with pre-installed InteliSCADA - Display Lite.	RD21050XBGA
InteliVision 13Touch	13.3" Marine certified display with pre-installed InteliSCADA - Display Pro+.	RD1IV13TBME
InteliVision 1550	New 15.6" industrial panel PC with pre-installed InteliSCADA - Display Pro+.	RD11550XBGA
InteliVision 18Touch G3	18.5" panel PC with pre-installed InteliSCADA - Display Lite.	RD3IV18TBPE

Available extension modules

Product	Description	Order code
Inteli AIN8	CAN module with 8 analogue inputs and 1 RPM/impulse input.	I-AIN8
Inteli AIN8TC	CAN module with 8 analog inputs for termocouples measurement.	I-AIN8TC
Inteli AIO9/1	CAN module with 9 analog inputs and 1 analog output.	I-AIO9/1
Inteli IO8/8	CAN module with 8 binary inputs and 8 binary outputs, or 16 binary inputs.	I-IO8/8
IGS-PTM	CAN module with 4 analog inputs, 1 analog output, 8 binary inputs and 8 binary outputs.	IGS-PTM
I-AOUT8	CAN module with 8 analog outputs.	I-AOUT8
IS-AIN8	CAN module with 8 analog inputs.	IS-AIN8
IGL-RA15	Remote annunciator with 15 programmable LEDs	EM2IGLRABAA
ECON 4	Digital speed governor dedicated for speed control of gas or diesel engines.	ECON-4
InteliGateway 100	A communication gateway for connection of multiple Modbus devices to WebSupervisor and InteliScada monitoring systems.	CM2GW100BAB
InteliGateway 101	Similar as InteliGateway 100 with 4G cellular connectivity and GNSS capability.	CM2GW101BAB
InteliGateway 300	A communication gateway for connection of multiple Modbus devices to WebSupervisor and InteliScada monitoring systems and to ComAp controllers.	CM2GW300BAB
InteliGateway 301	Similar as InteliGateway 300 with 4G cellular connectivity and GNSS capability.	CM2GW301BAB
I-CR	CAN repeater module, compatible with 32C/8C CAN intercontroller communication modes (CAN FD not supported).	I-CR
I-CR-R	CAN redundancy module (CAN FD not supported).	I-CR-R

Available extended features

Extended Feature	Description	Order Code
Modbus Client	Modbus client functionality for integration of 3rd party devices.	SKMODBCLI01
Controller Hot swap	Hot swap feature allows for a redundant/backup unit to take over control in case a primary controller fails.	SKHOTSWAP01

Accessories

Accessories	Description	Order Code
Mounting bracket	The door panel mounting bracket for InteliGen 1000 SC and InteliVision 5.2 display.	OT1MNT01AXX



E-mail: info@comap-control.com
 Web: www.comap-control.com

ComAp 
 The heart of smart control

Functions and protections

Support of functions and protections as defined by ANSI (American National Standards Institute):

Description	ANSI code	Description	ANSI code	Description	ANSI code
Multi-function device	11	Excitation loss	40	Overvoltage	59
Speed and frequency matching device	15	Current unbalance	46	Pressure switch	63
Data communications device	16EFT 16SC	Voltage unbalance	47	Liquid level switch	71
Starting-to-running transition contractor	19	Temperature monitoring	49T	Alarm relay *	74
Synchronizing-check	25	Overcurrent	50/50TD	Overfrequency	81H
Undervoltage	27	Earth fault current	50N+64	Underfrequency	81U
Annunciator*	30	Overcurrent IDMT	51		
Overload	32	Earth fault current IDMT	51+64		
Reverse power	32R	AC circuit breaker	52		
Undercurrent	37	Power factor	55		

* extension module IGL-RA15 required

Certifications and standards

> EN IEC 61000-6-2:2019 > EN IEC 61000-6-4:2019 > EN IEC 61010-1:2010/A1:2019/AC:2019-04 > EN IEC 60255-1:2009 > EN IEC 60255-26:2013 > EN IEC 60255-27:2013 > EN IEC 60255-127:2010 > EN IEC 60255-181:2019 > EN 60529:1991/A1:2000/A2:2013/AC:2016-12 (IP20)	> EN 60068-2-1:2007 > EN 60068-2-2:2007 > EN 60068-2-6:2007 > EN 60068-2-27:2008 > EN 60068-2-30:2005 > ULC 6200:2019	   
---	--	--

* ULC 6200:2019 Certified (see the NFL File for the FW version with the Witness test if it is required by the certification of the end product)



E-mail: info@comap-control.com
Web: www.comap-control.com

ComAp 
The heart of smart control