JUMO GmbH & Co. KG
Delivery address: Mackenrodtstraße 14
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
Email: mail@jumo.net
Internet: www.jumo.net

JUMO UK LTD
JUMO House
Temple Bank, Riverway
Harlow, Essex, CM20 2DY, UK
Phone: +44 1279 63 55 33
Fax: +44 1279 62 50 29
Email: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO Process Control, Inc.
6724 Joy Road
East Syracuse, NY 13057, USA
Phone: +1 315 437 5866
Fax: +1 315 437 5860
Email: info.us@jumo.net
Internet: www.jumousa.com

Screw-in RTD temperature probe with plug connector according to DIN EN 175301



- **For temperatures between -50 to +260 °C**
- **Vibration-resistant construction**
- **The plug connection is locked to ensure contact, protection type IP65**
- **Available with transmitter**
- **DNV approval for basic types 902044/20 and 902044/21 (max. insertion length 500 mm)**

Vibration-resistant screw-in RTD temperature probes allow temperatures to be measured under pressure in engines and compressors as well as in plant engineering and shipbuilding.

The plug connection between the protection fitting and the connecting cable is locked to ensure contact. It has protection type IP65 when connected.

The measuring insert is a Pt100 temperature sensor according to DIN EN 60751:2009 / IEC 60751:2008, class B in two-wire circuit as standard. Other versions with Pt1000 are also possible.

The connection can be carried out in a two-wire or four-wire circuit as required.

Basic types 902044/25 to 902044/29 are available as versions with transmitters (output 4 to 20 mA).

Technical data

Connection	Basic types 902044/15, 902044/20, 902044/25, 902044/28, and 902044/80: DIN EN 175301-803 plug connectors, Pg9 Basic types 902044/16, 902044/21, 902044/26, 902044/29, and 902044/81: DIN EN 175301-803 plug connectors, Pg11 Max. conductor cross section 1.5 mm^2, IP65, ambient temperature -40 to +125 °C For versions with transmitters: ambient temperature -40 to +85 °C
Process connection	Thread, stainless steel 1.4301/1.4571
Protection tube	Stainless steel 1.4571, Ø 8 mm, Ø 6 mm stepped down to Ø 3.5 mm, Max. pressure load 50 bar at 200 °C (basic types 902044/20 and 902044/21)
Measuring insert	Pt100 temperature sensor, DIN EN 60751:2009 / IEC 60751:2008, class B, A, or AA in two-wire or four-wire circuit, exchangeable. Shorter fitting lengths in connection with unfavorable fitting conditions (heat conduction error) can result in an exceedance of the tolerance class. The measuring insert is not exchangeable for versions equipped with transmitters.
Protection type	IP65 when connected
Response times	Basic types 902044/15 and 902044/16: $t_{0.5}$ = < 2 s, $t_{0.9}$ = < 4 s, in water with 0.4 m/s, Ø 6 mm stepped down to Ø 3.5 mm Basic types 902044/20 and 902044/21: $t_{0.5}$ = 15 s, $t_{0.9}$ = 45 s, in water with 0.4 m/s, Ø 8 mm Basic types 902044/25 to 902044/29: $t_{0.5}$ = < 2 s, $t_{0.9}$ = < 4 s, in water with 0.4 m/s, Ø 6 mm stepped down to Ø 3.5 mm Basic types 902044/80 and 902044/81: $t_{0.5}$ = 5 s, $t_{0.9}$ = 12 s, in water with 0.4 m/s, Ø 8 mm
Vibration resistance	DNV class B (EL ≤ 250 mm), class A (EL ≤ 500 mm)
Approvals	Basic type 902044/20 and 902044/21 DNV Class Guideline CG-0339, for details see certificate no. TAA00002RV
Accessories	Thermowell, data sheet 909710

Approval marks and certificates

JUMO GmbH & Co. KG
Delivery address: Mackenrodtstraße 14
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
Email: mail@jumo.net
Internet: www.jumo.net

JUMO UK LTD
JUMO House
Temple Bank, Riverway
Harlow, Essex, CM20 2DY, UK
Phone: +44 1279 63 55 33
Fax: +44 1279 62 50 29
Email: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO Process Control, Inc.
6724 Joy Road
East Syracuse, NY 13057, USA
Phone: +1 315 437 5866
Fax: +1 315 437 5860
Email: info.us@jumo.net
Internet: www.jumousa.com

Technical data

Transmitters	Input	
	Measurement input	Pt100 or Pt1000 according to DIN EN 60751:2009 / IEC 60751:2008
	Measuring range limits	-50 to +260 °C
	Measuring span	25 to 310 K (also see zero offset)
	Zero offset Data sheet 707030	For measuring spans < 75 K, fixed zero adjustment: -40 °C, -20 °C, 0 °C, 20 °C, and 40 °C For measuring spans ÷ 75 K: ±50 °C
	Sensor current	≤ 0.5 mA
	Sampling rate	Permanent measurement due to analog signal path
	Measuring circuit monitoring	
	Underrange	Dropping to ≤ 3.6 mA
	Overrange	Increasing to ÷ 22 mA to < 28 mA (typically 24 mA)
	Probe short circuit	≤ 3.6 mA
	Probe and line break	Positive: ÷ 22 mA to < 28 mA (typically 24 mA)
	Output	Only with the basic types 902044/25 to 902044/29
	Output signal	Load-independent direct current 4 to 20 mA
	Transmission behavior	Temperature-linear
	Transmission accuracy	≤ ±0.1 %
	Attenuation of the residual ripple of a voltage supply of 24 V, amplitude 10 V at 50 Hz, burden 470 Ω at load of 10 MΩ	40 dB
	Burden (Rb)	Rb = (Ub - 7.5 V) ÷ 22 mA
	Burden influence	≤ ±0.02% per 100 Ω[a]
	Setting time for temperature changes	≤ 10 ms
	Calibration conditions	DC 24 V at approx. 22 °C
	Calibration accuracy	≤ ±0.2%[a, b] or ≤ ±0.2 K
	Overall accuracy, sensor/calibration	±0.4 K (typically) at 20 °C and DC 24 V voltage supply
	Voltage supply	
	Voltage supply (Ub)	DC 7.5 to 30 V SELV
	Requirement	The device must be equipped with an electrical circuit that meets the requirements of DIN EN 61010-1 with regard to "Limited-energy circuits".
	Reverse voltage protection	Yes
	Voltage supply influence	≤ ±0.01% per V deviation from DC 24 V[a]
	Environmental influences	
	Operating temperature range	-40 to +85 °C
	Storage temperature range	-40 to +100 °C
	Temperature influence	≤ ±0.01% per K deviation from 22 °C[a]
	Resistance to climatic conditions similar to DIN EN 60654 class D1	Relative humidity ≤ 95% annual average, no condensation
	Electromagnetic compatibility (EMC)	EN 61326
	Interference emission	Class B - households or small businesses -
	Interference immunity	Industrial requirement

[a] All specifications refer to the measuring range end value of 20 mA.
[b] The higher value is valid.

JUMO GmbH & Co. KG
Delivery address: Mackenrodtstraße 14
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
Email: mail@jumo.net
Internet: www.jumo.net

JUMO UK LTD
JUMO House
Temple Bank, Riverway
Harlow, Essex, CM20 2DY, UK
Phone: +44 1279 63 55 33
Fax: +44 1279 62 50 29
Email: sales@jumo.co.uk
Internet: www.jumo.co.uk


JUMO Process Control, Inc.
6724 Joy Road
East Syracuse, NY 13057, USA
Phone: +1 315 437 5866
Fax: +1 315 437 5860
Email: info.us@jumo.net
Internet: www.jumousa.com

Approval marks and certificates

Approval mark	Test facility	Certificates/certification numbers	Inspection basis	Valid for
DNV	DNV	TAA00002RV	Class Guideline DNV-CG-0339	Basic type 902044/20 ... Basic type 902044/21 ...
H_2 ready	KIWA Nederland B.V.	P000343252HGV18	ANSI HGV 3.1:22	
SIL QUALIFIED	-	-	-	Extra codes 658 and 659 in conjunction with declaration of manufacturer
PL QUALIFIED	-	-	-	

Connection diagram


Connection, temperature probe without transmitte

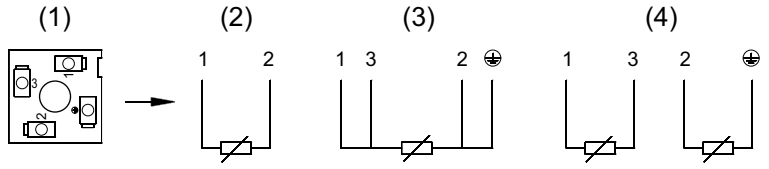

(1) Hirschmann device connector	(2) 2-wire circuit	(3) 4-wire circuit	(4) 2 x 2-wire circuit

The contact ⏚ must not be used for the earth connection!

Connection example with power pack

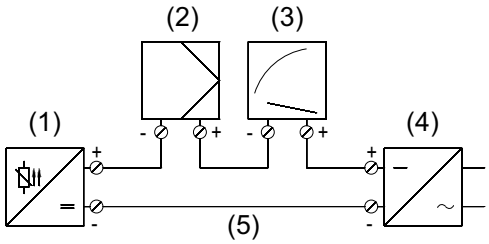

(1) 2-wire circuit transmitter	(2) Contoller	(3) Display unit	(4) Power pack	(5) 4 bis 20 mA


Connection for		Anschlussbelegung		
	Voltage supply DC 7,5 bis 30 V	+ 1	$R_B = \frac{U_b - 7{,}5\ V}{22\ mA}$ R_B = Load resistor U_b = Voltage supply	1 2 + -
	Current output 4 bis 20 mA	- 2		

JUMO GmbH & Co. KG
Delivery address: Mackenrodtstraße 14
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
Email: mail@jumo.net
Internet: www.jumo.net


JUMO UK LTD
JUMO House
Temple Bank, Riverway
Harlow, Essex, CM20 2DY, UK
Phone: +44 1279 63 55 33
Fax: +44 1279 62 50 29
Email: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO Process Control, Inc.
6724 Joy Road
East Syracuse, NY 13057, USA
Phone: +1 315 437 5866
Fax: +1 315 437 5860
Email: info.us@jumo.net
Internet: www.jumousa.com


Dimensions

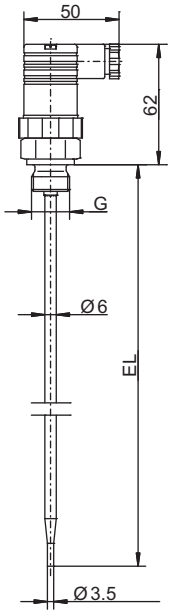


Basic type 902044/15
Basic type 902044/16

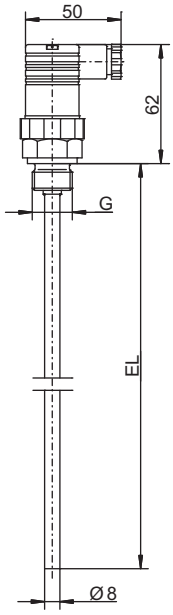


Basic type 902044/20
Basic type 902044/21

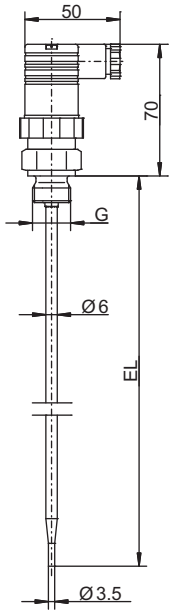

Basic type 902044/25
Basic type 902044/26

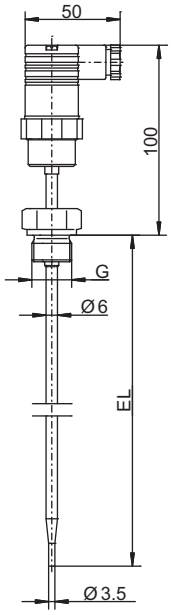

Basic type 902044/28
Basic type 902044/29

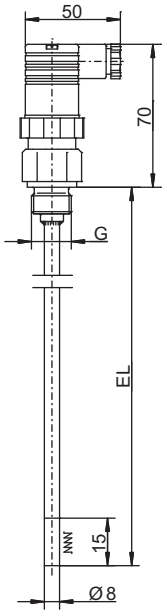

Basic type 902044/80
Basic type 902044/81


JUMO GmbH & Co. KG
Delivery address: Mackenrodtstraße 14
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
Email: mail@jumo.net
Internet: www.jumo.net

JUMO UK LTD
JUMO House
Temple Bank, Riverway
Harlow, Essex, CM20 2DY, UK
Phone: +44 1279 63 55 33
Fax: +44 1279 62 50 29
Email: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO Process Control, Inc.
6724 Joy Road
East Syracuse, NY 13057, USA
Phone: +1 315 437 5866
Fax: +1 315 437 5860
Email: info.us@jumo.net
Internet: www.jumousa.com

Order details

			(1)	**Basic type**
		902044/15		Screw-in RTD temperature probe with junction box Pg9 and stepped down protection tube according to DIN EN 175301-803 (DIN 43650)
		902044/16		Screw-in RTD temperature probe with junction box Pg11 and stepped down protection tube according to DIN EN 175301-803 (DIN 43650)
			(2)	**Operating temperature**
×	×	380		-50 to +200 °C
			(3)	**Measuring insert**
×	×	1003		1× Pt100 in two-wire circuit (standard)
×	×	1005		1× Pt1000 in two-wire circuit
×	×	1011		1× Pt100 in four-wire circuit
			(4)	**Tolerance class according to DIN EN 60751:2009 / IEC 60751:2008**
×	×	1		Class B (standard)
×	×	2		Class A
			(5)	**Protection tube diameter D**
×	×	6		Ø 6 mm, stepped down to Ø 3.5 mm
			(6)	**Insertion length EL (50 to 800 mm)**
×	×	50		50 mm
×	×	100		100 mm
×	×	150		150 mm
×	×	200		200 mm
×	×	250		250 mm
×	×	. . .		Specification in plain text (50 mm increments)
			(7)	**Process connection**
×	×	102		Screw connection G 1/4
×	×	103		Screw connection G 3/8
×	×	104		Screw connection G 1/2
×	×	126		Screw connection M18 × 1.5
×	×	128		Screw connection M20 × 1.5
×	×	144		Screw connection 1/2-14 NPT
			(8)	**Protection tube material**
×	×	26		Stainless steel 1.4571
			(9)	**Extra codes**
×	×	000		None
×	×	658		SIL and PL compatible (only in conjunction with JUMO SIL-certified safety temperature limiters and temperature monitors according to data sheet 701150)
×	×	659		SIL and PL compatible (only in conjunction with JUMO dTRANS T06 temperature transmitter according to data sheet 707071)
×	×	665		SIL and PL compatible (only in conjunction with JUMO dTRANS T07 SIL DIN rail temperature transmitter according to data sheet 707083)

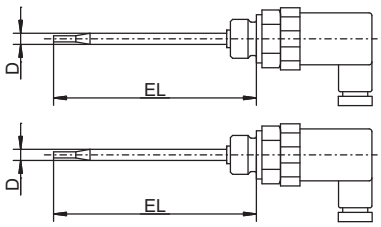

	(1)		(2)		(3)		(4)		(5)		(6)		(7)		(8)		(9)
Order code		-		-		-		-		-		-		-		/	
Order example	902044/15	-	380	-	1003	-	1	-	6	-	100	-	104	-	26	/	000


Note:
Version with machine connector M12 × 1, data sheets 902040 and 902815

JUMO GmbH & Co. KG
Delivery address: Mackenrodtstraße 14
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
Email: mail@jumo.net
Internet: www.jumo.net

JUMO UK LTD
JUMO House
Temple Bank, Riverway
Harlow, Essex, CM20 2DY, UK
Phone: +44 1279 63 55 33
Fax: +44 1279 62 50 29
Email: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO Process Control, Inc.
6724 Joy Road
East Syracuse, NY 13057, USA
Phone: +1 315 437 5866
Fax: +1 315 437 5860
Email: info.us@jumo.net
Internet: www.jumousa.com

Order details



			(1)	**Basic type**
		902044/20		Screw-in RTD temperature probe with junction box Pg9 according to DIN EN 175301-803 (DIN 43650)
		902044/21		Screw-in RTD temperature probe with junction box Pg11 according to DIN EN 175301-803 (DIN 43650)
			(2)	**Operating temperature**
×	×	380		-50 to +200 °C
			(3)	**Measuring insert**
×	×	1003		1× Pt100 in two-wire circuit (standard)
×	×	1005		1× Pt1000 in two-wire circuit
×	×	1011		1× Pt100 in four-wire circuit
×	×	2003		2× Pt100 in two-wire circuit
			(4)	**Tolerance class according to DIN EN 60751:2009 / IEC 60751:2008**
×	×	1		Class B (standard)
×	×	2		Class A
×	×	3		Class AA
			(5)	**Protection tube diameter D**
×	×	8		Ø 8 mm
			(6)	**Insertion length EL (50 to 800 mm)**
×	×	50		50 mm
×	×	100		100 mm
×	×	150		150 mm
×	×	200		200 mm
×	×	250		250 mm
×	×	500		500 mm
×	×	. . .		Specification in plain text (50 mm increments)
			(7)	**Process connection**
×	×	102		Screw connection G 1/4
×	×	103		Screw connection G 3/8
×	×	104		Screw connection G 1/2
×	×	126		Screw connection M18 × 1.5
×	×	128		Screw connection M20 × 1.5
×	×	144		Screw connection 1/2-14 NPT
			(8)	**Protection tube material**
×	×	26		Stainless steel 1.4571
			(9)	**Extra codes**
×	×	000		None
×	×	880		DNV approval (max. EL = 500 mm)
×	×	1160		H_2 ready – Mobile hydrogen application
×	×	658		SIL and PL compatible (only in conjunction with JUMO SIL-certified safety temperature limiters and temperature monitors according to data sheet 701150)
×	×	659		SIL and PL compatible (only in conjunction with JUMO dTRANS T06 temperature transmitter according to data sheet 707071)
×	×	665		SIL and PL compatible (only in conjunction with JUMO dTRANS T07 SIL DIN rail temperature transmitter according to data sheet 707083)

	(1)		(2)		(3)		(4)		(5)		(6)		(7)		(8)		(9)
Order code		-		-		-		-		-		-		-		/	
Order example	902044/20	-	380	-	1003	-	1	-	8	-	100	-	104	-	26	/	000

Note:
Version with machine connector M12 × 1, data sheets 902040 and 902815


JUMO GmbH & Co. KG
Delivery address: Mackenrodtstraße 14
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
Email: mail@jumo.net
Internet: www.jumo.net


JUMO UK LTD
JUMO House
Temple Bank, Riverway
Harlow, Essex, CM20 2DY, UK
Phone: +44 1279 63 55 33
Fax: +44 1279 62 50 29
Email: sales@jumo.co.uk
Internet: www.jumo.co.uk


JUMO Process Control, Inc.
6724 Joy Road
East Syracuse, NY 13057, USA
Phone: +1 315 437 5866
Fax: +1 315 437 5860
Email: info.us@jumo.net
Internet: www.jumousa.com


Order details

					(1)	**Basic type**
				902044/25		Screw-in RTD temperature probe with analog transmitter and junction box Pg9 according to DIN EN 175301-803 (DIN 43650)
				902044/26		Screw-in RTD temperature probe with analog transmitter and junction box Pg11 according to DIN EN 175301-803 (DIN 43650)
				902044/28		Screw-in RTD temperature probe with analog transmitter and junction box Pg9 according to DIN EN 175301-803 (DIN 43650) (neck tube design for higher temperatures)
				902044/29		Screw-in RTD temperature probe with analog transmitter and junction box Pg11 according to DIN EN 175301-803 (DIN 43650) (neck tube design for higher temperatures)
					(2)	**Operating temperature**
×	×			370		-50 to +150 °C
		×	×	386		-50 to +260 °C
					(3)	**Measuring insert**
×	×	×	×	1003		1× Pt100 in two-wire circuit
					(4)	**Tolerance class according to DIN EN 60751:2009 / IEC 60751:2008**
×	×	×	×	1		Class B (standard)
×	×	×	×	2		Class A
					(5)	**Protection tube diameter D**
×	×	×	×	6		Ø 6 mm, stepped down to Ø 3.5 mm
					(6)	**Insertion length EL (50 to 800 mm)**
×	×	×	×	50		50 mm
×	×	×	×	100		100 mm
×	×	×	×	150		150 mm
×	×	×	×	200		200 mm
×	×	×	×	250		250 mm
×	×	×	×	. . .		Specification in plain text (50 mm increments)
					(7)	**Process connection**
×	×	×	×	102		Screw connection G 1/4
×	×	×	×	103		Screw connection G 3/8
×	×	×	×	104		Screw connection G 1/2
×	×	×	×	126		Screw connection M18 × 1.5
×	×	×	×	128		Screw connection M20 × 1.5
×	×	×	×	144		Screw connection 1/2-14 NPT
					(8)	**Protection tube material**
×	×	×	×	26		Stainless steel 1.4571
					(9)	**Extra codes**
×	×	×	×	000		None









	(1)		(2)		(3)		(4)		(5)		(6)		(7)		(8)		(9)
Order code		-		-		-		-		-		-		-		/	
Order example	902044/25	-	370	-	1003	-	1	-	6	-	100	-	104	-	26	/	000

Note:
Version with machine connector M12 × 1, data sheets 902040 and 902815


JUMO GmbH & Co. KG
Delivery address: Mackenrodtstraße 14
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
Email: mail@jumo.net
Internet: www.jumo.net

JUMO UK LTD
JUMO House
Temple Bank, Riverway
Harlow, Essex, CM20 2DY, UK
Phone: +44 1279 63 55 33
Fax: +44 1279 62 50 29
Email: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO Process Control, Inc.
6724 Joy Road
East Syracuse, NY 13057, USA
Phone: +1 315 437 5866
Fax: +1 315 437 5860
Email: info.us@jumo.net
Internet: www.jumousa.com

Order details

			(1)	**Basic type**
		902044/80		Screw-in RTD temperature probe with junction box Pg9 according to DIN EN 175301-803 (DIN 43650) and flexible screw connection
		902044/81		Screw-in RTD temperature probe with junction box Pg11 according to DIN EN 175301-803 (DIN 43650) and flexible screw connection
			(2)	**Operating temperature**
×	×	380		-50 to +200 °C
			(3)	**Measuring insert**
×	×	1003		1× Pt100 in two-wire circuit (standard)
×	×	1005		1× Pt1000 in two-wire circuit
×	×	1011		1× Pt100 in four-wire circuit
×	×	2003		2× Pt100 in two-wire circuit
			(4)	**Tolerance class according to DIN EN 60751:2009 / IEC 60751:2008**
×	×	1		Class B (standard)
×	×	2		Class A
			(5)	**Protection tube diameter D**
×	×	8		Ø 8 mm
			(6)	**Insertion length EL (50 to 800 mm)**
×	×	50		50 mm
×	×	100		100 mm
×	×	150		150 mm
×	×	200		200 mm
×	×	250		250 mm
×	×	. . .		Specification in plain text (50 mm increments)
			(7)	**Process connection**
×	×	104		Screw connection G 1/2
			(8)	**Protection tube material**
×	×	26		Stainless steel 1.4571
			(9)	**Extra codes**
×	×	000		None
×	×	658		SIL and PL compatible (only in conjunction with JUMO SIL-certified safety temperature limiters and temperature monitors according to data sheet 701150)
×	×	659		SIL and PL compatible (only in conjunction with JUMO dTRANS T06 temperature transmitter according to data sheet 707071)
×	×	665		SIL and PL compatible (only in conjunction with JUMO dTRANS T07 SIL DIN rail temperature transmitter according to data sheet 707083)

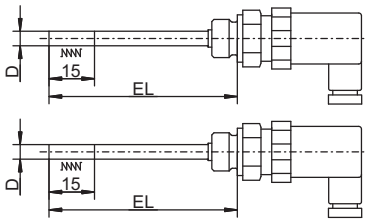

	(1)		(2)		(3)		(4)		(5)		(6)		(7)		(8)		(9)
Order code		-		-		-		-		-		-		-		/	
Order example	902044/80	-	380	-	1003	-	1	-	8	-	100	-	104	-	26	/	000

Stock versions

Order code	Part no.
902044/15-380-1003-1-6-100-104-26/000	00600899
902044/20-380-1003-1-8-50-104-26/000	00365259
902044/20-380-1003-1-8-100-104-26/000	00368414
902044/20-380-1003-1-8-150-104-26/000	00368416