
LAND®
AMETEK®

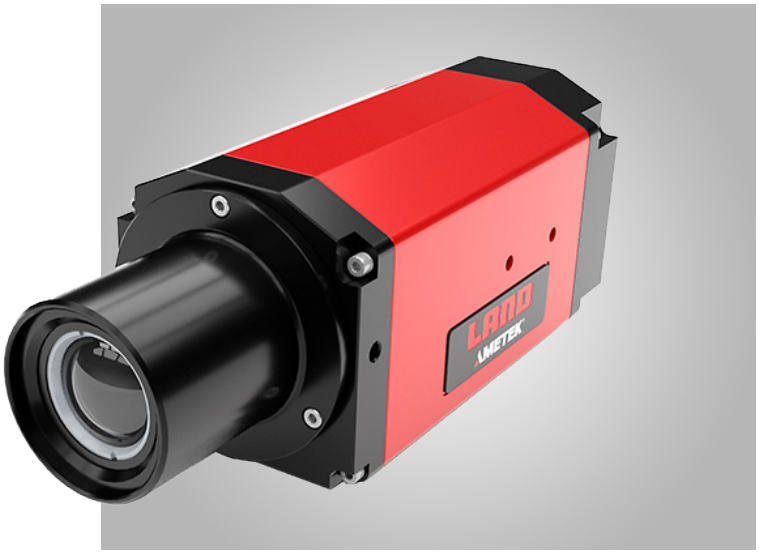

LWIR-640

Thermal imaging solutions

Designed for use in harsh industrial and environmental conditions, the LWIR-640's smart, Industry 4.0 capabilities, bi-direction digital interfaces and on-board I/O provide reliable and robust, real-time thermographic measurement and imagery in industrial processes.


It provides temperature measurements between -20 and 1500 °C (-4 to 2732 °F) in four ranges with a choice of different optics and lenses. An integrated webserver enables the camera to be used autonomously or easily integrated into new or existing process control systems.

The LWIR-640 measures and streams live true-temperature images at up to 60 frames per second, providing high-precision temperature measurements and thermal profiles to continuously control, document, and visualise industrial processes.

The pixel resolution of 640 x 480 pixels and the high thermal resolution deliver uniquely clear and detailed thermal images and videos, at up to 60 Hz frame rate.

The ImagePro software is a Windows PC software system that enables custom configuration of LAND imagers and offers advanced analysis and visualisation of temperature data, with the ability to monitor and control up to sixteen imagers.

LWIR-640 is a highly accurate long-wavelength infrared thermal imager for a range of industrial applications.

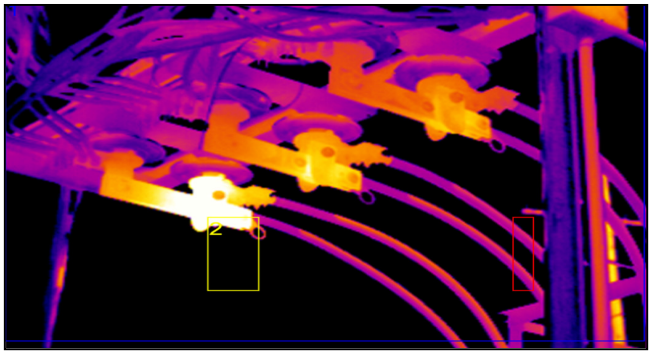

FEATURES & BENEFITS

- **Industrial thermal imager** for use in harsh environmental conditions, providing continuous and reliable temperature measurements.
- **Extensive accessories available -** Hazardous area option for use in Zones 1 and 21 for cooling and protection.
- **High-quality thermal images** with 640x480 pixel sensor.
- **Excellent homogeneity** for accurate temperature measurements in all parts of the image.
- **Integrated web server** allows for easy access for remote configuration, I/O setup and image monitoring setup via any web browser.

See degrees differently.

SPECIFICATIONS

IMAGER UNIT	
Measurement Range†:	-20 - 120 °C / -4 - 248 °F (Available in optics 25°, 12°, 6°) 0 to 500 °C / 32 to 932 °F (Available in optics 48°, 25°, 12°, 6°) 100 to 1000 °C / 212 to 1832 °F (Available in optics 48°, 25°, 12°, 6°) 150 to 1500 °C / 302 to 2732 °F (Available in optics 25°, 12°)
Pixel Resolution:	640x480
Detector:	Uncooled microbolometer
Spectral Response:	8 to 14 µm
Max Frame Rate:	HF: 60 Hz* / LF: 7.5 Hz
Optic (HFOV x VFOV):	48° x 36° / 25° x 19° / 12° x 9° / 6° x 4°
Pixel Size / Pitch:	17 µm
Focus Range:	0.3 m to infinity (motorised focus) – (48° & 25° HFOV) 0.75 m to infinity (motorised focus) – (12° HFOV) 10 m to infinity (motorised focus) – (6° HFOV)
Accuracy:	1.5% or 2 °C of reading
Noise:	0.5 °C / 0.9 °F RMS
NETD:	40 mK @ 20 °C
Dimensions:	80 x 80 x 222 mm (max) / 3.14 x 3.14 x 8.7 in (including lens)
Power Rating:	12 to 24 V DC, +/-10% 12W / IEEE 802.3 at PoE+
Weight:	1.6 kg / 3.5 lbs
Ambient Temperature:	-20 to 60 °C / -4 to 140 °F (0 - 95 % humidity, non-condensing)
Environmental Rating:	IP66/ NEMA 4
Compliance:	EMC (EN 61326-1)
Vibration:	Sinusoidal vibration: 3g-pk at 300 Hz. Random vibration endurance: overall GRMS 2.95 10-300 Hz. Tested in accordance with BS EN 60068 standards
CONNECTIVITY AND SERVICES	
Digital Connections:	M12 X coded 8way connector: 10/100/1000 Ethernet & IEEE 802.3 at PoE+
Analog Connections:	8 pin connector: 2pins - 12-24V DC power input 6 pins functions can be assigned to internal image processing algorithms 1 x 4 -20 mA output 1 x 4 -20 mA output OR relay output 1 x 4 -20 mA input OR digital input OR relay output Camera web browser for alignment & internal image processing analog I/O setup
Signal-LED:	3 x LED - Power / Status, Ethernet Comms & Camera internal temperature
Service:	Water, instrument air for optional cooling enclosures
SMART FUNCTIONALITY	
Integrated Webserver:	Remote access via Gbit ethernet interface Integrated webserver provides live thermal image
Autonomous Operation:	3 ROIs and configuration of integrated I/O's for full autonomous operation
THERMAL IMAGING PSU MODULE	
Components & Connections:	Power supply, Gbit Ethernet communications (switch)/ IEEE 802.3 at PoE+, Fibre optic data connection
Environmental Rating:	IP65 / NEMA 4
Size:	380 x 380 x 211 mm / 15 x 15 x 8.3 in
Weight:	15 kg / 33.07 lbs
IMAGE PROCESSING	
Integrated Webserver:	Integrated webserver accessible via standard web browser
Software:	ImagePro, ImagePro Application Specific
Workstation:	PC-Workstation (option)
Interfacing:	Open Data Interface, Modbus TCP, Moxa I/O unit
STANDARD ACCESSORIES	
Accessories (optional):	Power Supply, Industrial Housing and Purge, Light Housing with Purge, Cables, Brackets, Blower System, Software and Workstation

* 60 Hz instruments are subject to different export restrictions in different authorities and countries around the world. All sales must be subject to export licence review.
† 0-500 ℃ Range: 25 pixel standard deviation <1.0 ℃ at 30 ℃ for 48° HFOV / <1.0 ℃ at 0℃ for 25°/ 12° / 6° HFOV
100-1000 ℃ Range: 25 pixel standard deviation <1.0 ℃ at 100 ℃ for 48° HFOV / <1.0 ℃ at 50℃ for 25°/ 12° / 6° HFOV
150-1500 ℃ Range: <1.0 ℃ at 200℃ for 25°/ 12° / 6° HFOV

LAND® AMETEK®

CONTACT US

WEB: www.ametek-land.com

EMAIL: land.enquiry@ametek.com

We are fully committed to Quality Assurance. See all our accreditations at **AMETEK-LAND.COM/QUALITY**

MARCOMS_DOC-0019 LWIR-640 Brochure Rev 11 EN

Copyright © 2008-26 LAND Instruments International. Continuous product development may make it necessary to change these details without notice.