

A1

FLEXFLO® Peristaltic Metering Pump



Video link:

Features

- > Tube Failure Detection (TFD+) senses tube rupture
- > Heavy duty UV-resistant display shield protects pump controls
- > Brushless DC variable speed motor for precise flows
- > “C” Control Model includes multiple Input/Output options
- > “B” Base Model includes manual speed control
- > FDA compliant tubing



Highlights

Flow range 0.003 – 5.60 GPH 0.011 – 21.2 LPH	Pressures 100 PSI (6.89 bar)	Turndown ratio 2,000 : 1
Exclusive Tube Failure Detection (TFD+) System	Motor Brushless DC	Warranty 2 Years

Control Methods

Control Methods	Manual Control	4-20mA Input	Remote Start/Stop	4-20mA Output	Alarm Output	FVS	Motor Status Output	Prime Button	Lockout Feature
A1C	•	•	•	•	•	•	•	•	•
A1B	•							•	•



Maximum Working Pressure	100 psig (6.89 bar)
Maximum Fluid Temperature	185 °F (85 °C)
Maximum Ambient Temperature	14 °F to 115 °F/ -10 °C to 46 °C
Maximum Viscosity	5,000 Centipoise
Maximum Suction Lift	30 ft. Water at sea level (14.7 atm psi)
Operating Voltage	115V60Hz 1 PH (0.6A max., 80 W max.)
	220V50Hz 1 PH (0.3A max., 80 W max.)
	230V60Hz 1 PH (0.3A max., 80 W max.)
	230V50Hz 1 PH (0.3A max., 80 W max.)
	240V50Hz 1 PH (0.3A max., 80 W max.)
Power Cord Options	115V60Hz = NEMA 5/15 (USA)
	230V60Hz = NEMA 6/15 (USA)
	220V50Hz = CEE 7/VII (EU)
	240V50Hz = AS 3112 (Australia/New Zealand)
	230V50Hz = BS 1363/A (UK)
Signal Connectors	M12 - 5 pin (IP67 rated connectors on "C" models)
Motor	Brushless DC, 42W
Duty Cycle	Continuous
Motor Speed Adjustment Resolution	2,000 : 1 (0.05 - 100%) Max rpm = 65 rpm
Maximum Overall Dimensions	7.25" W x 9" H x 10" D (18.5 W x 22.9 H x 25.2 D cm)
Product Weight	6 lb. (2.7 Kg)
Approximate Shipping Weight	13 lb. (5.9 Kg)
Approximate Shipping Dimensions	10.5" W x 13.75" H x 11" D (26.7 W x 35 H x 28 D cm)
Control Panel Cover	UV-Resistant Polycarbonate
Enclosure	NEMA 4X, Valox® (PBT) & PA12
RoHS Compliant	Yes
Standards	cETLus, CE

Non-wetted Components:		Wetted Components:	
Enclosure:	Valox® (PBT) & PA12	Pump Head Assembly:	Tubing**: Flex-A-Prene®, Flex-A-Thane®, Flex-A-Chem®
Pump Head:	Valox® (PBT)	Adapter Fittings:	PVDF
Controls/Display Shield:	Polycarbonate, Gray - UV Resistant	Body & Insert:	PVDF
Pump Head Cover:	Acrylic	Check Ball:	Ceramic
	Permanently lubricated sealed motor shaft support bronze sleeve bearing.	Spring:	Hastelloy C-276
Cover Screws:	Stainless steel, polypropylene cap	Ball Seat O-Ring:	TFE/P
Roller Assembly:	Rotor: Valox® (PBT)	Static Seal O-Ring:	FKM
	Rollers: Nylon	Ancillary Items Provided (with "T" connection models only):	Suction Tubing: 3/8" OD x 1/4" ID x 5' Clear PVC
	Roller Bearings: Bronze		Discharge Tubing: 3/8" OD x 1/4" ID x 5' Polyethylene (LLDPE)
Motor Shaft:	Chrome plated steel		Suction Strainer: Polypropylene
TFD System Sensor:	Polysulfone (PES)		Weight: Ceramic
Power Cord:	3 Conductor, SJTW-A water-resistant	** Flex-A-Prene®, Flex-A-Thane®, and Flex-A-Chem® tubing comply with FDA 21 CFR, 117.2600 criteria for food processing.	
Mounting Brackets and Hardware:	316 Stainless steel screws, GF Nylon bracket		


NOTE: Additional Accessories, Tanks, and M12 Cables sold separately.

Output Specifications

Tube Model	Feed Rate			Max Speed	Max Pressure	Max Temperature
	GPH	LPH	mL/Min	RPM	PSI(bar)	°F(°C)
A1-1*	0.001 - 1.09	0.002 - 4.13	.035 - 69	65	65 (4.50)	130 (54)
A1-3*	0.003 - 5.60	0.011 - 21.2	.176 - 353	65	50 (3.45)	130 (54)
A1-4*	0.001 - 0.44	0.001 - 1.68	.014 - 28	65	100 (6.89)	130 (54)
A1-6*	0.001 - 1.35	0.003 - 5.14	.043 - 85	65	100 (6.89)	185 (85)
A1-7*	0.004 - 4.17	0.0158 - 15.8	.132 - 263	65	50 (3.45)	185 (85)
A1-8*	0.003 - 3.09	0.0117 - 11.7	.098 - 195	65	50 (3.45)	130 (54)

Dimensions

Dim	Inch	cm	Dim	Inch	cm
A	9.46"	24.02	D	7.18"	18.23
B	9.92"	25.19	E	1.5"	3.81
C	7.18"	18.23			

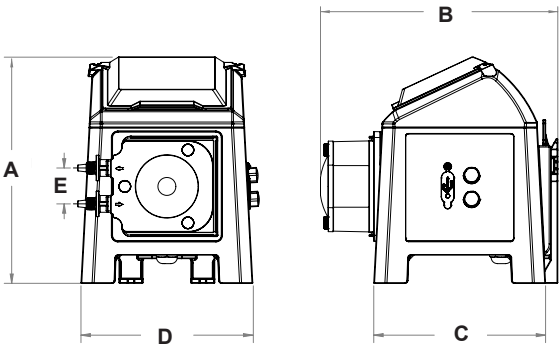


Model Number Matrix

A1

FLEXFLO® Model Number

A1	FLEXFLO® Peristaltic Metering Pump				
Series					
B	Base = Manual Speed Control (No I/O)				
C	Control = 4-20mA Input, 4-20mA Output, Manual Speed Control, Remote Start/Stop Input, Outputs (TFD, FVS, Motor)				
Power Cord (Operating voltage requirement 96VAC to 264VAC)					
4	115V 50/60Hz, NEMA 5/15 plug (US)	6	220V 50/60Hz, CEE 7/V11 plug (EU)	X	No Power Cord
Pump Tube Size and Material					
1	1/4" OD Flex-A-Thane® 0.001 – 1.09 GPH .035 - 69 mL/Min 65 PSI (4.5 bar)				
3	7/16" OD Flex-A-Thane® 0.003 – 5.60 GPH .176 - 353 mL/Min 50 PSI (3.45 bar)				
4	1/4" OD Flex-A-Prene® 0.001 - 0.44 GPH .014 - 28 mL/Min 100 PSI (6.89 bar)				
6	3/8" OD Flex-A-Prene® 0.001 – 1.35 GPH .043 - 85 mL/Min 100 PSI (6.89 bar)				
7	7/16" OD Flex-A-Prene® 0.002 – 4.17 GPH .132 - 263 mL/Min 50 PSI (3.45 bar)				
8	7/16" OD Flex-A-Chem® 0.002 – 3.09 GPH .098 - 195 mL/Min 50 PSI (3.45 bar)				
Inlet/Outlet Connection Size, Connection Type					
T	3/8" OD x 1/4" Tube Compression Fitting				
M	1/2" Male NPT Fitting				
MB	1/2" Male BSPT Fitting, Natural PVDF (Kynar)				
A1	B	4	-	1	T
Sample Model Number					

Accessories

	KIT-S07 KIT-S15 KIT-S30 * Includes cover and foot valve		 <table><tr><td>A-050</td><td>5mL</td></tr><tr><td>A-100</td><td>10mL</td></tr><tr><td>A-150</td><td>15mL</td></tr></table>	A-050	5mL	A-100	10mL	A-150	15mL
A-050	5mL								
A-100	10mL								
A-150	15mL								
KIT-S07 (7 Gallon), KIT-S15 (15 Gallon), KIT-S30 (30 Gallon) STAR III TANKS, PP		KIT-PSM (Lg, KIT-PSS (Sm) WALL MOUNT BRACKET, HDPE		A-050, A-100, A-150 SILICON OIL					
90010-663 115V/60Hz NEMA 5/15 90010-664 220V/50Hz CEE 7/11 90010-665 230V/50Hz BS 1363/A 90010-666 240V/50Hz AS 3112 90010-696 230V/60Hz NEMA 6/15 90010-821 115V Lockable									
POWER CABLES - 6 ft		CABLE-UAC USB A-C CABLE - 3 ft		KIT-M12 TWO M12 CABLES - 9.8 ft					
									
TI40-6V T.I. INJECTOR, 3/8" OD		C-340A FOOT VALVE		A1-(see spare parts page) Spare Tube Element					
Visit Accessory Pages for More Options									