
ARTM
Clean Water Applications

- 1" NPT Brass Screw Plug
- Copper Sheath Element
- High Watt Density (64 - 86 W/In²)
- 0.75 - 3 kW
- Integral Thermostat (SPST)
- 120 and 240 Volt, Single Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure




E1 — Dimensions (Inches)



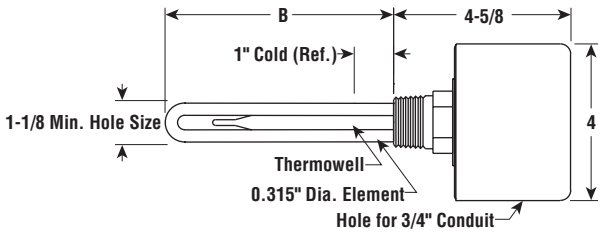

E2 — Dimensions (Inches)

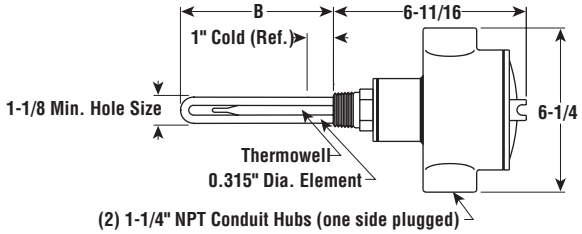

SCREW PLUG

Specifications and Ordering Information

							T4 — Temperature (60 - 187°F)			T5 — Temperature (60 - 240°F)			T8 — Temperature (0 - 127°F)		
kW	Volts	Phase	W/In²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose[1]															
0.75	120	1	64	1	6-5/16	2	**ARTM-750T4**	**S**	**191257**	ARTM-750T5	NS	186087	ARTM-750T8	NS	186095
0.75	240	1	64	1	6-5/16	2	**ARTM-750T4**	**S**	**191265**	ARTM-750T5	NS	186108	ARTM-750T8	NS	186116
1	120	1	85	1	6-5/16	2	**ARTM-1000T4**	**S**	**191273**	**ARTM-1000T5**	**S**	**186124**	**ARTM-1000T8**	**S**	**186132**
1	240	1	85	1	6-5/16	2	**ARTM-1000T4**	**S**	**191281**	**ARTM-1000T5**	**S**	**186140**	ARTM-1000T8	NS	186159
1.25	120	1	83	1	8-1/16	3	**ARTM-1250T4**	**S**	**191290**	ARTM-1250T5	NS	186167	ARTM-1250T8	NS	186175
1.25	240	1	83	1	8-1/16	3	**ARTM-1250T4**	**S**	**191302**	ARTM-1250T5	NS	186183	ARTM-1250T8	NS	186191
1.5	120	1	86	1	9-1/4	3	**ARTM-1500T4**	**S**	**191310**	**ARTM-1500T5**	**S**	**186204**	ARTM-1500T8	NS	186212
1.5	240	1	86	1	9-1/4	3	**ARTM-1500T4**	**S**	**191329**	ARTM-1500T5	NS	186220	ARTM-1500T8	NS	186239
2	120	1	83	1	12-1/4	3	**ARTM-2000T4**	**S**	**191337**	ARTM-2000T5	NS	186247	ARTM-2000T8	NS	186255
2	240	1	83	1	12-1/4	3	**ARTM-2000T4**	**S**	**191345**	ARTM-2000T5	NS	186263	ARTM-2000T8	NS	186271
2.5	120	1	79	1	16-1/4	3	**ARTM-2500T4**	**S**	**191353**	ARTM-2500T5	NS	186280	ARTM-2500T8	NS	186298
2.5	240	1	79	1	16-1/4	3	**ARTM-2500T4**	**S**	**191361**	ARTM-2500T5	NS	186300	ARTM-2500T8	NS	186319
3	240	1	78	1	19-7/8	3	**ARTM-3000T4**	**S**	**191388**	ARTM-3000T5	NS	186327	ARTM-3000T8	NS	186335
E2 Moisture Resistant/Explosion Resistant[2]															
0.75	120	1	64	1	6-5/16	5	**ARTM-750E2T4**	**S**	**182684**	ARTM-750E2T5	NS	319724	ARTM-750E2T8	NS	319732
0.75	240	1	64	1	6-5/16	5	ARTM-750E2T4	NS	182692	ARTM-750E2T5	NS	319740	ARTM-750E2T8	NS	319759
1	120	1	85	1	6-5/16	5	**ARTM-1000E2T4**	**S**	**182705**	ARTM-1000E2T5	NS	319767	ARTM-1000E2T8	NS	319775
1	240	1	85	1	6-5/16	5	ARTM-1000E2T4	NS	182713	ARTM-1000E2T5	NS	319783	ARTM-1000E2T8	NS	319791
1.25	120	1	83	1	8-1/16	6	ARTM-1250E2T4	NS	182721	ARTM-1250E2T5	NS	319804	ARTM-1250E2T8	NS	319812
1.25	240	1	83	1	8-1/16	6	ARTM-1250E2T4	NS	182730	ARTM-1250E2T5	NS	319820	ARTM-1250E2T8	NS	319839
1.5	120	1	86	1	9-1/4	6	**ARTM-1500E2T4**	**S**	**182748**	ARTM-1500E2T5	NS	319847	ARTM-1500E2T8	NS	319855
1.5	240	1	86	1	9-1/4	6	ARTM-1500E2T4	NS	182756	ARTM-1500E2T5	NS	319863	ARTM-1500E2T8	NS	319871
2	120	1	83	1	12-1/4	6	ARTM-2000E2T4	NS	182764	ARTM-2000E2T5	NS	319880	ARTM-2000E2T8	NS	319898
2	240	1	83	1	12-1/4	6	ARTM-2000E2T4	NS	182772	ARTM-2000E2T5	NS	319900	ARTM-2000E2T8	NS	319919
2.5	120	1	79	1	16-1/4	6	ARTM-2500E2T4	NS	182780	ARTM-2500E2T5	NS	319927	ARTM-2500E2T8	NS	319935
2.5	240	1	79	1	16-1/4	6	ARTM-2500E2T4	NS	182799	ARTM-2500E2T5	NS	319943	ARTM-2500E2T8	NS	319951
3	240	1	78	1	19-7/8	6	**ARTM-3000E2T4**	**S**	**182801**	ARTM-3000E2T5	NS	319960	ARTM-3000E2T8	NS	319978

Stock Status: **S** = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are $_{C}$CSA$_{US}$® Certified.

FASTShip™
Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.


"Under the U.S. Federal Safe Drinking Water Act, it is unlawful to install or use this product in any service that comes into contact with water for human consumption (including drinking, food or beverage preparation, hand washing, or teeth brushing). This product is intended exclusively for use in non-potable service."

ARMT-1
Clean Water Applications

- 1-1/4" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (43 - 86 W/In²)
- 1 - 2 kW
- Integral Thermostat (SPST)
- 120 and 240 Volt, Single Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure


E1 — Dimensions (Inches)



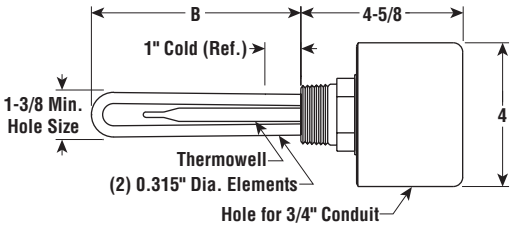

E2 — Dimensions (Inches)



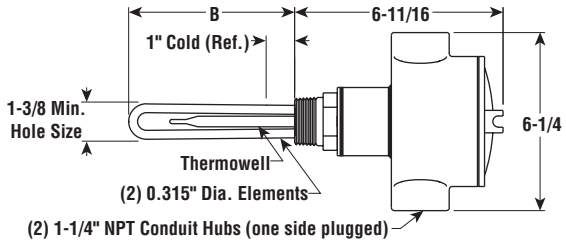

Specifications and Ordering Information

							T4 — Temperature (60 - 187°F)			T5 — Temperature (60 - 240°F)			T8 — Temperature (0 - 127°F)		
kW	Volts	Phase	W/In²	No. Elem.	DIM. B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose[1]															
1	120	1	43	2	6-1/8	5	ARMT-110-3T4	NS	036564	ARMT-110-3T5	NS	036644	ARMT-110-3T8	NS	036724
1	240	1	43	2	6-1/8	5	ARMT-110-3T4	NS	036572	ARMT-110-3T5	NS	036652	ARMT-110-3T8	NS	036732
1.2	120	1	53	2	6-1/8	5	ARMT-112T4	NS	036580	ARMT-112T5	NS	036660	ARMT-112T8	NS	036740
1.2	240	1	53	2	6-1/8	5	ARMT-112T4	NS	036599	ARMT-112T5	NS	036679	ARMT-112T8	NS	036759
1.5	120	1	65	2	6-1/8	5	ARMT-115T4	NS	036601	ARMT-115T5	NS	036687	ARMT-115T8	NS	036767
1.5	240	1	65	2	6-1/8	5	ARMT-115T4	NS	036610	ARMT-115T5	NS	036695	ARMT-115T8	NS	036775
2	120	1	86	2	6-1/8	5	ARMT-120T4	NS	036628	ARMT-120T5	NS	036708	ARMT-120T8	NS	036783
2	240	1	86	2	6-1/8	5	ARMT-120T4	NS	036636	ARMT-120T5	NS	036716	ARMT-120T8	NS	036791
E2 Moisture Resistant/Explosion Resistant[2]															
1	120	1	43	2	6-1/8	8	ARMT-110-3E2T4	NS	036804	ARMT-110-3E2T5	NS	036880	ARMT-110-3E2T8	NS	036960
1	240	1	43	2	6-1/8	8	ARMT-110-3E2T4	NS	036812	ARMT-110-3E2T5	NS	036898	ARMT-110-3E2T8	NS	036978
1.2	120	1	53	2	6-1/8	8	ARMT-112E2T4	NS	036820	ARMT-112E2T5	NS	036900	ARMT-112E2T8	NS	036986
1.2	240	1	53	2	6-1/8	8	ARMT-112E2T4	NS	036839	ARMT-112E2T5	NS	036919	ARMT-112E2T8	NS	036994
1.5	120	1	65	2	6-1/8	8	ARMT-115E2T4	NS	036847	ARMT-115E2T5	NS	036927	ARMT-115E2T8	NS	037006
1.5	240	1	65	2	6-1/8	8	ARMT-115E2T4	NS	036855	ARMT-115E2T5	NS	036935	ARMT-115E2T8	NS	037014
2	120	1	86	2	6-1/8	8	ARMT-120E2T4	NS	036863	ARMT-120E2T5	NS	036943	ARMT-120E2T8	NS	037022
2	240	1	86	2	6-1/8	8	ARMT-120E2T4	NS	036871	ARMT-120E2T5	NS	036951	ARMT-120E2T8	NS	037030

Stock Status: **S** = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are $_{C}CSA_{US}$® Certified.

FASTShip™
Same-day shipping on stock item orders received before 4 pm CST.
3-day shipping on assembly-stock items.

"Under the U.S. Federal Safe Drinking Water Act, it is unlawful to install or use this product in any service that comes into contact with water for human consumption (including drinking, food or beverage preparation, hand washing, or teeth brushing). This product is intended exclusively for use in non-potable service."


ARMT-2

Clean Water Applications



- 2" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (46 - 53 W/In²)
- 1.5 - 15 kW
- Integral Thermostat (DPST)
- 120, 208, 240 and 480 Volt, Single Phase
- General Purpose Terminal Enclosure

E1 — Dimensions (Inches)

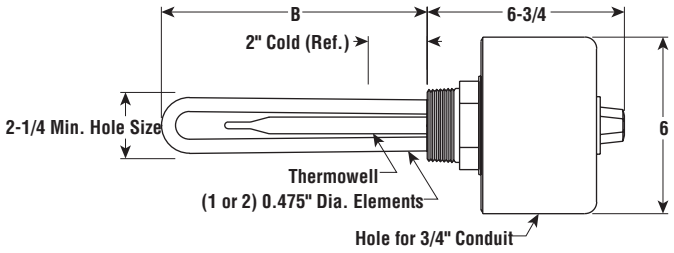

FASTShip™

Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose												
1.5	120	1	48	1	12	5	ARMT-2155T2	NS	270035	ARMT-2155T1	NS	284760
1.5	208	1	48	1	12	5	ARMT-2155T2	NS	323264	ARMT-2155T1	NS	323272
1.5	240	1	48	1	12	5	**ARMT-2155T2**	**S**	**270043**	ARMT-2155T1	NS	284795
2	120	1	51	2	8	5	ARMT-2205-3T2	NS	270060	ARMT-2205-3T1	NS	284824
2	208	1	51	2	8	5	ARMT-2205-3T2	NS	323301	ARMT-2205-3T1	NS	323310
2	240	1	51	2	8	5	ARMT-2205-3T2	NS	270078	ARMT-2205-3T1	NS	284840
2	480	1	51	2	8	5	ARMT-2205-3T2	NS	284883	ARMT-2205-3T1	NS	284875
2.5	208	1	48	2	9-1/2	6	ARMT-2255T2	NS	323344	ARMT-2255T1	NS	323352
2.5	240	1	48	2	9-1/2	6	ARMT-2255T2	NS	270107	ARMT-2255T1	NS	284912
2.5	480	1	48	2	9-1/2	6	ARMT-2255T2	NS	284955	ARMT-2255T1	NS	284947
3	120	1	48	2	12	6	ARMT-2305T2	NS	270123	ARMT-2305T1	NS	284980
3	208	1	48	2	12	6	ARMT-2305T2	NS	323387	ARMT-2305T1	NS	323395
3	240	1	48	2	12	6	**ARMT-2305T2**	**S**	**270131**	ARMT-2305T1	NS	285000
3	480	1	48	2	12	6	ARMT-2305T2	NS	285034	ARMT-2305T1	NS	285026
4	208	1	48	2	18	7	ARMT-2405T2	NS	323424	ARMT-2405T1	NS	323432
4	240	1	48	2	18	7	**ARMT-2405T2**	**S**	**270166**	ARMT-2405T1	NS	285050
4	480	1	48	2	18	7	ARMT-2405T2	NS	285093	ARMT-2405T1	NS	285085
5	208	1	53	2	19-13/16	8	ARMT-2505T2	NS	323467	ARMT-2505T1	NS	323475
5	240	1	53	2	19-13/16	8	**ARMT-2505T2**	**S**	**270190**	ARMT-2505T1	NS	285122
5	480	1	53	2	19-13/16	8	**ARMT-2505T2**	**S**	**274757**	ARMT-2505T1	NS	285157
6	208	1	47	2	25-1/8	8	ARMT-2605T2	NS	323504	ARMT-2605T1	NS	323512
6	240	1	47	2	25-1/8	8	ARMT-2605T2	NS	270211	ARMT-2605T1	NS	285181
6	480	1	47	2	25-1/8	8	ARMT-2605T2	NS	285229	ARMT-2605T1	NS	285210
7	208	1	49	2	28	9	ARMT-2705T2	NS	323547	ARMT-2705T1	NS	323555
7	240	1	49	2	28	9	ARMT-2705T2	NS	270238	ARMT-2705T1	NS	285253
7	480	1	49	2	28	9	ARMT-2705T2	NS	285296	ARMT-2705T1	NS	285288
10	208	1	46	2	40-1/2	9	ARMT-2105T2	NS	323580	ARMT-2105T1	NS	323598
10	240	1	46	2	40-1/2	9	ARMT-2105T2	NS	270019	ARMT-2105T1	NS	284701
10	480	1	46	2	40-1/2	9	ARMT-2105T2	NS	274765	ARMT-2105T1	NS	284736
12	240	1	46	2	48	10	ARMT-2125T2[1]	NS	310480	ARMT-2125T1[1]	NS	310527
12	480	1	46	2	48	10	ARMT-2125T2	NS	310498	ARMT-2125T1	NS	310535
15	240	1	50	2	54	11	ARMT-21505T2[1]	NS	310560	ARMT-21505T1[1]	NS	310607
15	480	1	50	2	54	11	ARMT-21505T2	NS	310578	ARMT-21505T1	NS	310615

Stock Status: **S** = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.


1. Not UL Listed or CSA Certified (Exceeds 48 Amps).

"Under the U.S. Federal Safe Drinking Water Act, it is unlawful to install or use this product in any service that comes into contact with water for human consumption (including drinking, food or beverage preparation, hand washing, or teeth brushing). This product is intended exclusively for use in non-potable service."


ARMT-2

Clean Water Applications *(cont'd.)*

- 2" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (46 - 53 W/In²)
- 1.5 - 15 kW
- Integral Thermostat (DPST)
- 120, 208, 240 and 480 Volt, Single Phase
- Moisture Resistant/Explosion Resistant Terminal Enclosure

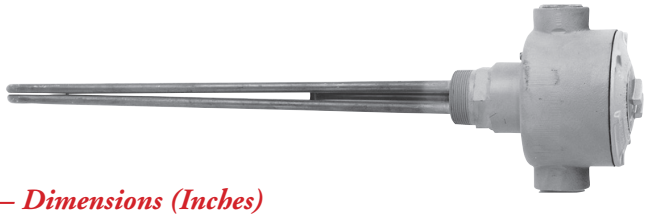

E2 — Dimensions (Inches)

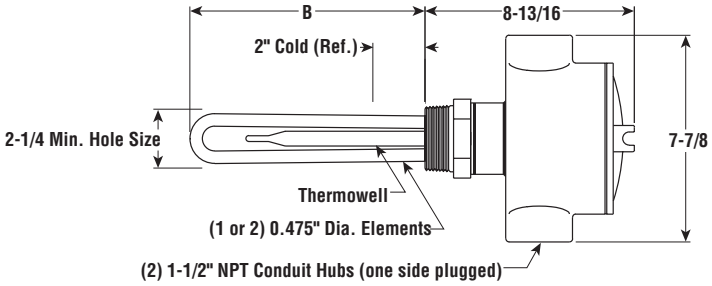

FASTShip

Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E2 Moisture Resistant/Explosion Resistant												
1.5	120	1	48	1	12	10	ARMT-2155E2T2	NS	284787	ARMT-2155E2T1	NS	284779
1.5	208	1	48	1	12	10	ARMT-2155E2T2	NS	323280	ARMT-2155E2T1	NS	323299
1.5	240	1	48	1	12	10	ARMT-2155E2T2	NS	284816	ARMT-2155E2T1	NS	284808
2	120	1	51	2	8	10	ARMT-2205-3E2T2	NS	284832	ARMT-2205-3E2T1	NS	274773
2	208	1	51	2	8	10	ARMT-2205-3E2T2	NS	323328	ARMT-2205-3E2T1	NS	323336
2	240	1	51	2	8	10	ARMT-2205-3E2T2	NS	284867	ARMT-2205-3E2T1	NS	284859
2	480	1	51	2	8	10	ARMT-2205-3E2T2	NS	284904	ARMT-2205-3E2T1	NS	284891
2.5	208	1	48	2	9-1/2	12	ARMT-2255E2T2	NS	323360	ARMT-2255E2T1	NS	323379
2.5	240	1	48	2	9-1/2	12	ARMT-2255E2T2	NS	284939	ARMT-2255E2T1	NS	284920
2.5	480	1	48	2	9-1/2	12	ARMT-2255E2T2	NS	284971	ARMT-2255E2T1	NS	284963
3	120	1	48	2	12	12	ARMT-2305E2T2	NS	285018	ARMT-2305E2T1	NS	284998
3	208	1	48	2	12	12	ARMT-2305E2T2	NS	323408	ARMT-2305E2T1	NS	323416
3	240	1	48	2	12	12	ARMT-2305E2T2	NS	274781	ARMT-2305E2T1	NS	274802
3	480	1	48	2	12	12	ARMT-2305E2T2	NS	274790	ARMT-2305E2T1	NS	285042
4	208	1	48	2	18	13	ARMT-2405E2T2	NS	323440	ARMT-2405E2T1	NS	323459
4	240	1	48	2	18	13	ARMT-2405E2T2	NS	285077	ARMT-2405E2T1	NS	285069
4	480	1	48	2	18	13	ARMT-2405E2T2	NS	285114	ARMT-2405E2T1	NS	285106
5	208	1	53	2	19-13/16	14	ARMT-2505E2T2	NS	323483	ARMT-2505E2T1	NS	323491
5	240	1	53	2	19-13/16	14	ARMT-2505E2T2	NS	285149	ARMT-2505E2T1	NS	285130
5	480	1	53	2	19-13/16	14	ARMT-2505E2T2	NS	285173	ARMT-2505E2T1	NS	285165
6	208	1	47	2	25-1/8	14	ARMT-2605E2T2	NS	323520	ARMT-2605E2T1	NS	323539
6	240	1	47	2	25-1/8	14	ARMT-2605E2T2	NS	285202	ARMT-2605E2T1	NS	285190
6	480	1	47	2	25-1/8	14	ARMT-2605E2T2	NS	285245	ARMT-2605E2T1	NS	285237
7	208	1	49	2	28	15	ARMT-2705E2T2	NS	323563	ARMT-2705E2T1	NS	323571
7	240	1	49	2	28	15	ARMT-2705E2T2	NS	285270	ARMT-2705E2T1	NS	285261
7	480	1	49	2	28	15	ARMT-2705E2T2	NS	285309	ARMT-2705E2T1	NS	285317
10	208	1	46	2	40-1/2	16	ARMT-2105E2T2	NS	323600	ARMT-2105E2T1	NS	323619
10	240	1	46	2	40-1/2	16	ARMT-2105E2T2	NS	284728	ARMT-2105E2T1	NS	284710
10	480	1	46	2	40-1/2	16	ARMT-2105E2T2	NS	284752	ARMT-2105E2T1	NS	284744
12	240	1	46	2	48	17	ARMT-2125E2T2[1]	NS	310500	ARMT-2125E2T1[1]	NS	310543
12	480	1	46	2	48	17	ARMT-2125E2T2	NS	310519	ARMT-2125E2T1	NS	310551
15	240	1	50	2	54	18	ARMT-21505E2T2[1]	NS	310586	ARMT-21505E2T1[1]	NS	310623
15	480	1	50	2	54	18	ARMT-21505E2T2	NS	310594	ARMT-21505E2T1	NS	310631

Stock Status: **S** = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Not $_{C}$CSA$_{US}$® Certified (Exceeds 48 Amps).

"Under the U.S. Federal Safe Drinking Water Act, it is unlawful to install or use this product in any service that comes into contact with water for human consumption (including drinking, food or beverage preparation, hand washing, or teeth brushing). This product is intended exclusively for use in non-potable service."


ARMT-3

Clean Water Applications

- 2-1/2" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (46 - 53 W/In²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 120, 208, 240 and 480 Volt, 1 and 3 Phase
- General Purpose Terminal Enclosure



E1 — Dimensions (Inches)

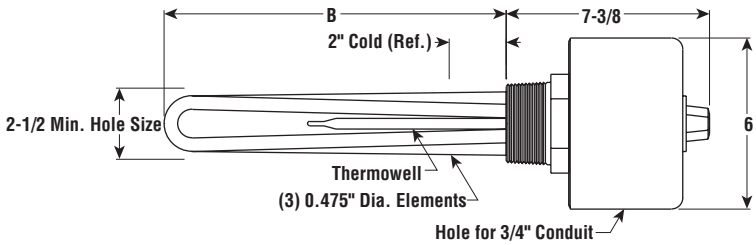

FASTShip

Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose												
3	120	1	51	3	7-3/8	6	ARMT-3305T2	NS	190852	ARMT-3305T1	NS	310957
3	208	1	51	3	7-3/8	6	ARMT-3305T2	NS	320733	ARMT-3305T1	NS	320741
3	208	3	51	3	7-3/8	6	ARMT-3305T2	NS	320776	ARMT-3305T1	NS	320784
3	240	1	51	3	7-3/8	6	ARMT-3305T2	NS	285819	ARMT-3305T1	NS	285800
3	240	3	51	3	7-3/8	6	ARMT-3305T2	NS	274810	ARMT-3305T1	NS	285843
3	480	1	51	3	7-3/8	6	ARMT-3305T2	NS	270297	ARMT-3305T1	NS	310981
3	480	3	51	3	7-3/8	6	ARMT-3305T2	NS	270300	ARMT-3305T1	NS	310990
3.75	120	1	52	3	8-7/8	6	ARMT-3375T2	NS	190895	ARMT-3375T1	NS	311044
3.75	208	1	52	3	8-7/8	6	ARMT-3375T2	NS	320813	ARMT-3375T1	NS	320821
3.75	208	3	52	3	8-7/8	6	ARMT-3375T2	NS	320856	ARMT-3375T1	NS	320864
3.75	240	1	52	3	8-7/8	6	ARMT-3375T2	NS	285886	ARMT-3375T1	NS	285878
3.75	240	3	52	3	8-7/8	6	ARMT-3375T2	NS	285923	ARMT-3375T1	NS	285915
3.75	480	1	52	3	8-7/8	6	ARMT-3375T2	NS	270350	ARMT-3375T1	NS	311052
3.75	480	3	52	3	8-7/8	6	ARMT-3375T2	NS	274829	ARMT-3375T1	NS	311060
4.5	120	1	48	3	11-3/8	7	ARMT-3455T2	NS	270377	ARMT-3455T1	NS	311132
4.5	208	1	48	3	11-3/8	7	ARMT-3455T2	NS	320899	ARMT-3455T1	NS	320901
4.5	208	3	48	3	11-3/8	7	ARMT-3455T2	NS	320936	ARMT-3455T1	NS	320944
4.5	240	1	48	3	11-3/8	7	ARMT-3455T2	NS	285966	ARMT-3455T1	NS	285958
4.5	240	3	48	3	11-3/8	7	ARMT-3455T2	NS	274837	ARMT-3455T1	NS	285990
4.5	480	1	48	3	11-3/8	7	ARMT-3455T2	NS	286037	ARMT-3455T1	NS	286029
4.5	480	3	48	3	11-3/8	7	ARMT-3455T2	NS	274845	ARMT-3455T1	NS	286061
6	120	1	48	3	17-3/8	8	ARMT-3605T2	NS	270430	ARMT-3605T1	NS	311167
6	208	1	48	3	17-3/8	8	ARMT-3605T2	NS	320979	ARMT-3605T1	NS	320987
6	208	3	48	3	17-3/8	8	ARMT-3605T2	NS	321015	ARMT-3605T1	NS	321023
6	240	1	48	3	17-3/8	8	ARMT-3605T2	NS	286109	ARMT-3605T1	NS	286096
6	240	3	48	3	17-3/8	8	ARMT-3605T2	NS	274853	ARMT-3605T1	NS	286133
6	480	1	48	3	17-3/8	8	ARMT-3605T2	NS	286176	ARMT-3605T1	NS	286168
6	480	3	48	3	17-3/8	8	**ARMT-3605T2**	**S**	**286213**	ARMT-3605T1	NS	286205
7.5	208	1	53	3	19-1/8	8	ARMT-3755T2	NS	321058	ARMT-3755T1	NS	321066
7.5	208	3	53	3	19-1/8	8	ARMT-3755T2	NS	321090	ARMT-3755T1	NS	321103
7.5	240	1	53	3	19-1/8	8	ARMT-3755T2	NS	274861	ARMT-3755T1	NS	286230
7.5	240	3	53	3	19-1/8	8	ARMT-3755T2	NS	286272	ARMT-3755T1	NS	286264
7.5	480	1	53	3	19-1/8	8	ARMT-3755T2	NS	286310	ARMT-3755T1	NS	286301
7.5	480	3	53	3	19-1/8	8	ARMT-3755T2	NS	286352	ARMT-3755T1	NS	286344
9	208	1	47	3	24-1/2	9	ARMT-3905T2	NS	321138	ARMT-3905T1	NS	321146
9	208	3	47	3	24-1/2	9	ARMT-3905T2	NS	321170	ARMT-3905T1	NS	321189
9	240	1	47	3	24-1/2	9	ARMT-3905T2	NS	286395	ARMT-3905T1	NS	286387
9	240	3	47	3	24-1/2	9	ARMT-3905T2	NS	274870	ARMT-3905T1	NS	286424
9	480	1	47	3	24-1/2	9	ARMT-3905T2	NS	286467	ARMT-3905T1	NS	286459
9	480	3	47	3	24-1/2	9	ARMT-3905T2	NS	274888	ARMT-3905T1	NS	285491


"Under the U.S. Federal Safe Drinking Water Act, it is unlawful to install or use this product in any service that comes into contact with water for human consumption (including drinking, food or beverage preparation, hand washing, or teeth brushing). This product is intended exclusively for use in non-potable service."

ARMT-3
Clean Water Applications *(cont'd.)*



- 2-1/2" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (46 - 53 W/In²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 120, 208, 240 and 480 Volt, 1 and 3 Phase
- General Purpose Terminal Enclosure

E1 — Dimensions (Inches)

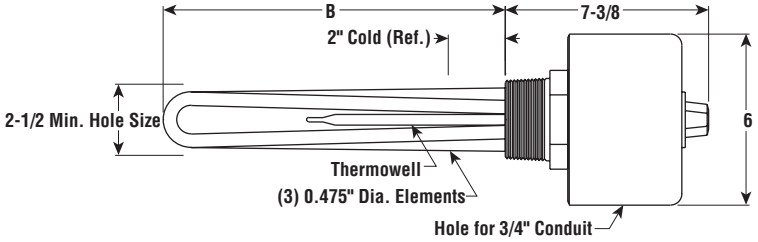

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose												
12	208	1	46	3	32-5/16	13	ARMT-31205T2[1]	NS	321218	ARMT-31205T1[1]	NS	321226
12	208	3	46	3	32-5/16	13	ARMT-31205T2	NS	321250	ARMT-31205T1	NS	321269
12	240	1	46	3	32-5/16	13	ARMT-31205T2[1]	NS	321293	ARMT-31205T1[1]	NS	321306
12	240	3	46	3	32-5/16	13	ARMT-31205T2	NS	321330	ARMT-31205T1	NS	321349
12	480	1	46	3	32-5/16	13	ARMT-31205T2	NS	321373	ARMT-31205T1	NS	321381
12	480	3	46	3	32-5/16	13	ARMT-31205T2	NS	321410	ARMT-31205T1	NS	321429
15	208	1	46	3	39-3/4	14	ARMT-31505T2[1]	NS	321453	ARMT-31505T1[1]	NS	321461
15	208	3	46	3	39-3/4	14	ARMT-31505T2	NS	321496	ARMT-31505T1	NS	321509
15	240	1	46	3	39-3/4	14	ARMT-31505T2[1]	NS	321533	ARMT-31505T1[1]	NS	321541
15	240	3	46	3	39-3/4	14	ARMT-31505T2	NS	321576	ARMT-31505T1	NS	321584
15	480	1	46	3	39-3/4	14	ARMT-31505T2	NS	321613	ARMT-31505T1	NS	321621
15	480	3	46	3	39-3/4	14	ARMT-31505T2	NS	321656	ARMT-31505T1	NS	321664
18	208	3	46	3	47-1/4	15	ARMT-31805T2[1]	NS	321699	ARMT-31805T1[1]	NS	321701
18	240	1	46	3	47-1/4	15	ARMT-31805T2[1]	NS	321736	ARMT-31805T1[1]	NS	321744
18	240	3	46	3	47-1/4	15	ARMT-31805T2	NS	321779	ARMT-31805T1	NS	321787
18	480	1	46	3	47-1/4	15	ARMT-31805T2	NS	321816	ARMT-31805T1	NS	321824
18	480	3	46	3	47-1/4	15	ARMT-31805T2	NS	321859	ARMT-31805T1	NS	321867

Stock Status: **S** = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Not UL Listed or CSA Certified (Exceeds 48 Amps).

FASTShip™
Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.

"Under the U.S. Federal Safe Drinking Water Act, it is unlawful to install or use this product in any service that comes into contact with water for human consumption (including drinking, food or beverage preparation, hand washing, or teeth brushing). This product is intended exclusively for use in non-potable service."


ARMT-3

Clean Water Applications *(cont'd.)*

- 2-1/2" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (46 - 53 W/In²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 120, 208, 240 and 480 Volt, 1 and 3 Phase
- Moisture Resistant/Explosion Resistant Terminal Enclosure



E2 — Dimensions (Inches)

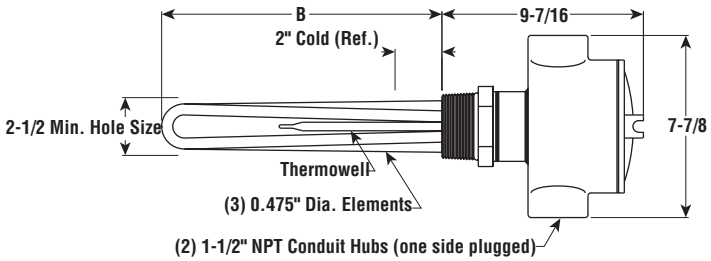

SCREW PLUG

FASTShip

Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In²	No. Elem.	DIMB (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E2 Moisture Resistant/Explosion Resistant												
3	120	1	51	3	7-3/8	11	ARMT-3305E2T2	NS	310965	ARMT-3305E2T1	NS	310973
3	208	1	51	3	7-3/8	11	ARMT-3305E2T2	NS	320750	ARMT-3305E2T1	NS	320768
3	208	3	51	3	7-3/8	11	ARMT-3305E2T2	NS	320792	ARMT-3305E2T1	NS	320805
3	240	1	51	3	7-3/8	11	ARMT-3305E2T2	NS	285835	ARMT-3305E2T1	NS	285827
3	240	3	51	3	7-3/8	11	ARMT-3305E2T2	NS	285860	ARMT-3305E2T1	NS	285851
3	480	1	51	3	7-3/8	11	ARMT-3305E2T2	NS	311001	ARMT-3305E2T1	NS	311028
3	480	3	51	3	7-3/8	11	ARMT-3305E2T2	NS	311010	ARMT-3305E2T1	NS	311036
3.75	120	1	52	3	8-7/8	11	ARMT-3375E2T2	NS	311079	ARMT-3375E2T1	NS	311108
3.75	208	1	52	3	8-7/8	11	ARMT-3375E2T2	NS	320830	ARMT-3375E2T1	NS	320848
3.75	208	3	52	3	8-7/8	11	ARMT-3375E2T2	NS	320872	ARMT-3375E2T1	NS	320880
3.75	240	1	52	3	8-7/8	11	ARMT-3375E2T2	NS	285907	ARMT-3375E2T1	NS	285894
3.75	240	3	52	3	8-7/8	11	ARMT-3375E2T2	NS	285940	ARMT-3375E2T1	NS	285931
3.75	480	1	52	3	8-7/8	11	ARMT-3375E2T2	NS	311087	ARMT-3375E2T1	NS	311116
3.75	480	3	52	3	8-7/8	11	ARMT-3375E2T2	NS	311095	ARMT-3375E2T1	NS	311124
4.5	120	1	48	3	11-3/8	12	ARMT-3455E2T2	NS	311140	ARMT-3455E2T1	NS	311159
4.5	208	1	48	3	11-3/8	12	ARMT-3455E2T2	NS	320910	ARMT-3455E2T1	NS	320928
4.5	208	3	48	3	11-3/8	12	ARMT-3455E2T2	NS	320952	ARMT-3455E2T1	NS	320960
4.5	240	1	48	3	11-3/8	12	ARMT-3455E2T2	NS	285982	ARMT-3455E2T1	NS	285974
4.5	240	3	48	3	11-3/8	12	ARMT-3455E2T2	NS	286010	ARMT-3455E2T1	NS	286002
4.5	480	1	48	3	11-3/8	12	ARMT-3455E2T2	NS	286053	ARMT-3455E2T1	NS	286045
4.5	480	3	48	3	11-3/8	12	ARMT-3455E2T2	NS	286088	ARMT-3455E2T1	NS	286070
6	120	1	48	3	17-3/8	13	ARMT-3605E2T2	NS	311175	ARMT-3605E2T1	NS	311183
6	208	1	48	3	17-3/8	13	ARMT-3605E2T2	NS	320995	ARMT-3605E2T1	NS	321007
6	208	3	48	3	17-3/8	13	ARMT-3605E2T2	NS	321031	ARMT-3605E2T1	NS	321040
6	240	1	48	3	17-3/8	13	ARMT-3605E2T2	NS	286125	ARMT-3605E2T1	NS	286117
6	240	3	48	3	17-3/8	13	ARMT-3605E2T2	NS	286150	ARMT-3605E2T1	NS	286141
6	480	1	48	3	17-3/8	13	ARMT-3605E2T2	NS	286192	ARMT-3605E2T1	NS	286184
6	480	3	48	3	17-3/8	13	ARMT-3605E2T2	NS	286221	ARMT-3605E2T1	NS	274896
7.5	208	1	53	3	19-1/8	13	ARMT-3755E2T2	NS	321074	ARMT-3755E2T1	NS	321082
7.5	208	3	53	3	19-1/8	13	ARMT-3755E2T2	NS	321111	ARMT-3755E2T1	NS	321120
7.5	240	1	53	3	19-1/8	13	ARMT-3755E2T2	NS	286256	ARMT-3755E2T1	NS	286248
7.5	240	3	53	3	19-1/8	13	ARMT-3755E2T2	NS	286299	ARMT-3755E2T1	NS	286280
7.5	480	1	53	3	19-1/8	13	ARMT-3755E2T2	NS	286336	ARMT-3755E2T1	NS	286328
7.5	480	3	53	3	19-1/8	13	ARMT-3755E2T2	NS	286379	ARMT-3755E2T1	NS	286360
9	208	1	47	3	24-1/2	14	ARMT-3905E2T2	NS	321154	ARMT-3905E2T1	NS	321162
9	208	3	47	3	24-1/2	14	ARMT-3905E2T2	NS	321197	ARMT-3905E2T1	NS	321200
9	240	1	47	3	24-1/2	14	ARMT-3905E2T2	NS	286416	ARMT-3905E2T1	NS	286408
9	240	3	47	3	24-1/2	14	ARMT-3905E2T2	NS	286440	ARMT-3905E2T1	NS	286432
9	480	1	47	3	24-1/2	14	ARMT-3905E2T2	NS	286483	ARMT-3905E2T1	NS	286475
9	480	3	47	3	24-1/2	14	ARMT-3905E2T2	NS	286512	ARMT-3905E2T1	NS	286504


"Under the U.S. Federal Safe Drinking Water Act, it is unlawful to install or use this product in any service that comes into contact with water for human consumption (including drinking, food or beverage preparation, hand washing, or teeth brushing). This product is intended exclusively for use in non-potable service."

ARMT-3
Clean Water Applications *(cont'd.)*



- 2-1/2" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (46 - 53 W/In²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 120, 208, 240 and 480 Volt, 1 and 3 Phase
- Moisture Resistant/Explosion Resistant Terminal Enclosure

E2 — Dimensions (Inches)

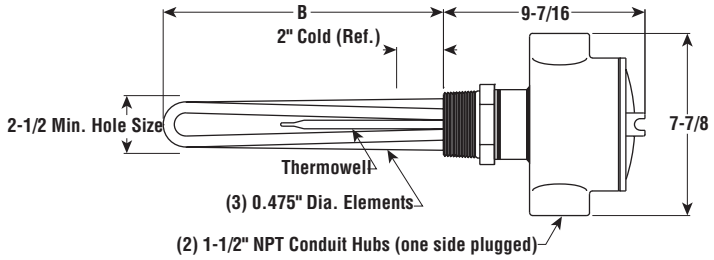

FASTShip™
Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E2 Moisture Resistant/Explosion Resistant												
12	208	1	46	3	32-5/16	18	ARMT-31205E2T2[1]	AS	321234	ARMT-31205E2T1[1]	NS	321242
12	208	3	46	3	32-5/16	18	ARMT-31205E2T2	AS	321277	ARMT-31205E2T1	NS	321285
12	240	1	46	3	32-5/16	18	**ARMT-31205E2T2[1]**	**S**	**321314**	ARMT-31205E2T1[1]	NS	321322
12	240	3	46	3	32-5/16	18	ARMT-31205E2T2	AS	321357	ARMT-31205E2T1	NS	321365
12	480	1	46	3	32-5/16	18	ARMT-31205E2T2	AS	321390	ARMT-31205E2T1	NS	321402
12	480	3	46	3	32-5/16	18	ARMT-31205E2T2	AS	321437	ARMT-31205E2T1	NS	321445
15	208	1	46	3	39-3/4	19	ARMT-31505E2T2[1]	AS	321470	ARMT-31505E2T1[1]	NS	321488
15	208	3	46	3	39-3/4	19	ARMT-31505E2T2	AS	321517	ARMT-31505E2T1	NS	321525
15	240	1	46	3	39-3/4	19	ARMT-31505E2T2[1]	AS	321550	ARMT-31505E2T1[1]	NS	321568
15	240	3	46	3	39-3/4	19	ARMT-31505E2T2	AS	321592	ARMT-31505E2T1	NS	321605
15	480	1	46	3	39-3/4	19	ARMT-31505E2T2	AS	321630	ARMT-31505E2T1	NS	321648
15	480	3	46	3	39-3/4	19	ARMT-31505E2T2	AS	321672	ARMT-31505E2T1	NS	321680
18	208	1	46	3	47-1/4	20	ARMT-31805E2T2[1]	AS	311212	ARMT-31805E2T1[1]	NS	311220
18	208	3	46	3	47-1/4	20	ARMT-31805E2T2[1]	AS	321710	ARMT-31805E2T1[1]	NS	321728
18	240	1	46	3	47-1/4	20	ARMT-31805E2T2[1]	AS	321752	ARMT-31805E2T1[1]	NS	321760
18	240	3	46	3	47-1/4	20	ARMT-31805E2T2	AS	321795	ARMT-31805E2T1	NS	321808
18	480	1	46	3	47-1/4	20	ARMT-31805E2T2	AS	321832	ARMT-31805E2T1	NS	321840
18	480	3	46	3	47-1/4	20	ARMT-31805E2T2	AS	321875	ARMT-31805E2T1	NS	321883

Stock Status: **S** = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Not $_{C}CSA_{US}$® Certified (Exceeds 48 Amps).

"Under the U.S. Federal Safe Drinking Water Act, it is unlawful to install or use this product in any service that comes into contact with water for human consumption (including drinking, food or beverage preparation, hand washing, or teeth brushing). This product is intended exclusively for use in non-potable service."