PN7007


Pressure sensor with display

PN-001BRBR14-QFRKG/US/ /V

Article no longer available - archive entry

Alternative articles: PN7097

When selecting an alternative article and accessories please note that technical data may differ!

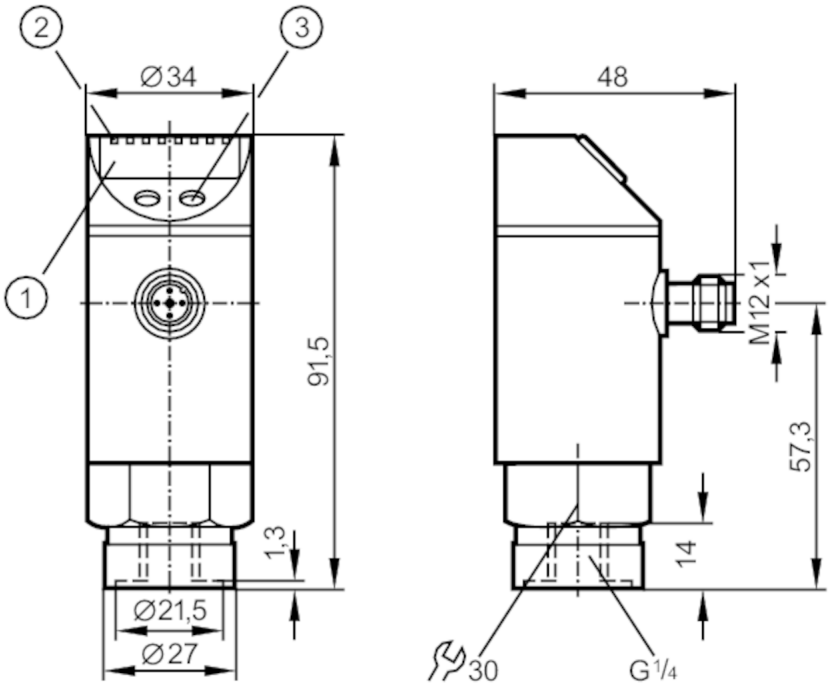

1 alphanumeric display 4-digit
2 LEDs Display unit / switching status
3 programming button

Product characteristics			
Number of inputs and outputs	Number of digital outputs: 2		
Measuring range	0...1 bar	0...1000 mbar	0...14.5 psi
Process connection	threaded connection G 1/4 internal thread		
Application			
Special feature	Gold-plated contacts		
Application	for industrial applications		
Media	liquids and gases		
Medium temperature [°C]	-25...80		
Min. burst pressure	30000 mbar	450 psi	3 MPa
Pressure rating	10000 mbar	145 psi	1 MPa
Type of pressure	relative pressure		
Electrical data			
Operating voltage [V]	18...36 DC; (to SELV/PELV)		
Current consumption [mA]	< 35		
Min. insulation resistance [MΩ]	100; (500 V DC)		
Protection class	III		

PN7007

Pressure sensor with display

PN-001BRBR14-QFRKG/US/ /V

Reverse polarity protection		yes		
Overvoltage protection		yes; (< 40 V)		
Power-on delay time	[s]	0.3		
Integrated watchdog		yes		
Inputs / outputs				
Number of inputs and outputs		Number of digital outputs: 2		
Outputs				
Total number of outputs		2		
Output signal		switching signal; IO-Link; (configurable)		
Electrical design		PNP/NPN		
Number of digital outputs		2		
Output function		normally open / normally closed; (parameterisable)		
Max. voltage drop switching output DC	[V]	2		
Permanent current rating of switching output DC	[mA]	250		
Switching frequency DC	[Hz]	< 170		
Short-circuit protection		yes		
Type of short-circuit protection		pulsed		
Measuring/setting range				
Measuring range		0...1 bar	0...1000 mbar	0...14.5 psi
Set point SP		10...1000 mbar	0.2...14.5 psi	
Reset point rP		5...995 mbar	0.1...14.4 psi	
In steps of		5 mbar	0.1 psi	
Factory setting			SP1 = 250 mbar	rP1 = 230 mbar
			SP2 = 750 mbar	rP2 = 730 mbar
Accuracy / deviations				
Switch point accuracy	[% of the span]	< ± 0,5		
Repeatability	[% of the span]	< ± 0,1; (with temperature fluctuations < 10 K)		
Characteristics deviation	[% of the span]	< ± 0,25 (BFSL) / < ± 0,5 (LS); (BFSL = Best Fit Straight Line; LS = limit value setting)		
Hysteresis deviation	[% of the span]	< ± 0,25		
Long-term stability	[% of the span]	< ± 0,05; (per 6 months)		
Temperature coefficient zero point	[% of the span / 10 K]	0,2; (-20...80 °C)		
Temperature coefficient span	[% of the span / 10 K]	0,2; (-20...80 °C)		
Response times				
Delay time programmable dS, dr	[s]	0; 0,2...50		

PN7007

Pressure sensor with display

PN-001BRBR14-QFRKG/US/ /V

Software / programming			
Parameter setting options		hysteresis / window; normally open / normally closed; diagnostic function; switching logic; switch-on/switch-off delay; Damping; Display unit	
Interfaces			
Communication interface		IO-Link	
Transmission type		COM2 (38,4 kBaud)	
IO-Link revision		1.1	
SDCI standard		IEC 61131-9 CDV	
SIO mode		yes	
Required master port type		A	
Process data analogue		1	
Process data binary		2	
Min. process cycle time	[ms]	2.3	
Supported DeviceIDs		**Type of operation**	**DeviceID**
		default	313
Operating conditions			
Ambient temperature	[°C]	-20...80	
Storage temperature	[°C]	-40...100	
Protection		IP 65	
Tests / approvals			
EMC		EN 61000-4-2 ESD	4 kV CD / 8 kV AD
		EN 61000-4-3 HF radiated	10 V/m
		EN 61000-4-4 Burst	2 kV
		EN 61000-4-5 Surge	0,5/1 kV
		EN 61000-4-6 HF conducted	10 V
Shock resistance		DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance		DIN IEC 68-2-6	20 g (10...2000 Hz)
MTTF	[years]	219	
Pressure Equipment Directive		Sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	
Mechanical data			
Weight	[g]	261	
Housing		cylindrical	
Dimensions	[mm]	Ø 34 / L = 91.5	
Materials		stainless steel (304/1.4301); stainless steel (316L/1.4404); PC; PBT; PEI; FKM; PTFE	
Materials (wetted parts)		stainless steel (303/1.4305); ceramics; FKM	
Min. pressure cycles		100 million	
Process connection		threaded connection G 1/4 internal thread	
Restrictor element integrated		no (can be retrofitted)	
Displays / operating elements			
Display		Display unit	4 x LED, green
		switching status	2 x LED, yellow
		function display	alphanumeric display, 4-digit
		measured values	alphanumeric display, 4-digit
Remarks			
Pack quantity		1 pcs.	

PN7007


Pressure sensor with display


PN-001BRBR14-QFRKG/US/ /V

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4, gold-plated



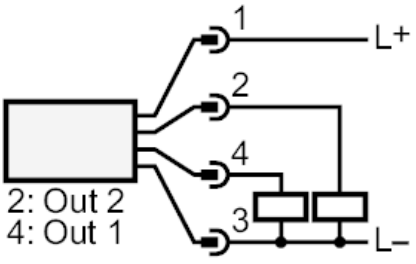

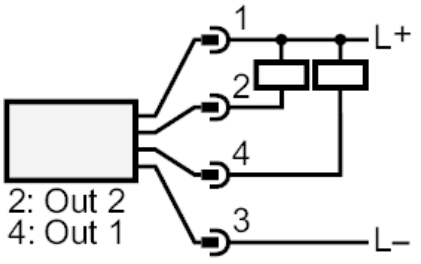

OUT1	switching output IO-Link
OUT2	switching output Diagnostic output