




Axially Split Volute Casing Pump

Omega / Omega V

Generation 1, Generation 2

Type Series Booklet

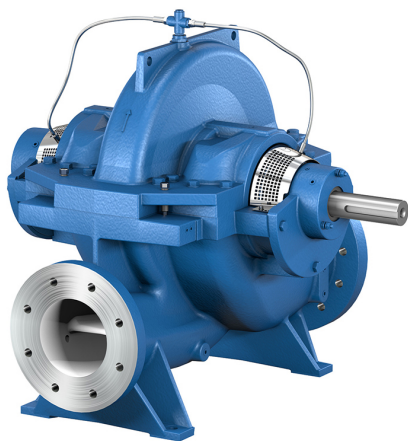

Generation 1



Generation 2

Legal information/Copyright

Type Series Booklet Omega / Omega V

All rights reserved. The contents provided herein must neither be distributed, copied, reproduced, edited or processed for any other purpose, nor otherwise transmitted, published or made available to a third party without the manufacturer's express written consent.

Subject to technical modification without prior notice.

© KSB SE & Co. KGaA, Frankenthal 2026-09-04

Contents


Water Supply	5
Axially Split Volute Casing Pump	5
Omega / Omega V	5
Main applications	5
Fluids handled	5
Operating data	5
Designation	6
Design details	6
Materials	7
Coating and preservation	9
Product benefits	10
Certifications	10
Acceptance inspections/tests	10
Selection information	11
Solids content	11
Directions of rotation and flow	11
Overview of product features / selection tables	12
Standard design	12
Hot water variant	16
Overview of sizes	19
Related documents	19
Specifications required for enquiries/orders	20
Selection charts	21
Omega/Omega V (Generation 1), 50 Hz, n = 2980 rpm	21
Omega/Omega V (Generation 2), 50 Hz, n = 2980 rpm	21
Omega/Omega V (Generation 1), 50 Hz, n = 1490 rpm	22
Omega/Omega V (Generation 2), 50 Hz, n = 1490 rpm	22
Omega/Omega V (Generation 1), 60 Hz, n = 3550 rpm	23
Omega/Omega V (Generation 2), 60 Hz, n = 3550 rpm	23
Omega/Omega V (Generation 1), 60 Hz, n = 1785 rpm	24
Omega/Omega V (Generation 2), 60 Hz, n = 1785 rpm	24
Types of installation	25
Fig.0	25
3E	25
DB/DK	26
DJ	26
DP/DM	27
Scope of supply	28
General assembly drawing with list of components	29
Omega (Generation 1)	29
Horizontal installation	29
Vertical installation	30
Standard variant: gland packing	31
Standard variant: mechanical seal (schematic)	31
Standard variant: impeller with impeller wear ring	31
Standard design: product-lubricated bearing (Omega V)	31
Omega (Generation 2)	32
Horizontal installation 3E	32
Horizontal installation: Position of hexagon head bolts and screw plugs	33
Standard design: Single mechanical seals 5A/M7N/M74, unbalanced	33
Standard variant: Double mechanical seals 5A/M7N/M74, tandem arrangement, unbalanced	33
Standard design: Mechanical seal 5BOM, balanced	33
Standard design: Single mechanical seals 5A/M7N, unbalanced (shaft unit DW40.1)	34
Standard variant: Double mechanical seals 5A/M7N, tandem arrangement, unbalanced (shaft unit DW40.1)	34
Vertical installation DJ	35
Vertical installation DB/DK	36
Vertical installation DM	38
Vertical installation: Position of hexagon head bolts and screw plugs	39
Standard variant: Single mechanical seals 5A/M7N/M74, unbalanced, drive end	39
Standard variant: Double mechanical seals 5A/M7N/M74, tandem arrangement, unbalanced, non-drive end	39

Standard variant: Single mechanical seal 5BOM, balanced, drive end	39
Standard variant: Single mechanical seals 5A/M7N, unbalanced, drive end (shaft unit DW40.1)	40
Standard variant: Double mechanical seals 5A/M7N, tandem arrangement, unbalanced, drive end (shaft unit DW40.1)	40
Standard variant: Double mechanical seals 5A/M7N, tandem arrangement, unbalanced, non-drive end (shaft unit DW40.1)	40
Standard variant: Single mechanical seal 5BOM, balanced, drive end (shaft unit DW40.1)	40
Standard design: Position of grooved pins	41
Standard variant: Impeller with impeller wear ring	41

Water Supply

Axially Split Volute Casing Pump

Omega / Omega V

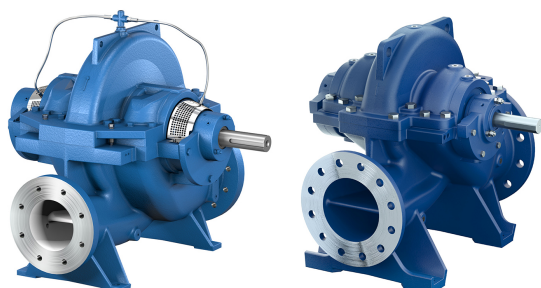

Generation 1

Generation 2

Operating data

Table 1: Operating properties

Characteristic		Value
Size	DN [mm]	80-400
	DN [inch]	3-15
Flow rate ¹⁾	Q [m³/h]	≤ 4400
	Q [US.gpm]	≤ 19375
Head ²⁾	H [m]	≤ 210
	H [ft]	≤ 689
Operating pressure ²⁾	p [bar]	≤ 25
	p [psi]	≤ 363
Fluid temperature ³⁾	T [°C]	0 to 140
	T [°F]	32 to 284

Main applications

- Waterworks
- Desalination plants
- Pressure boosting
- Water transport
- Service water and cooling water for power stations and industry
- Irrigation pumping stations
- Drainage pumping stations
- Fire-fighting systems
- Shipbuilding
- District heating systems and district cooling systems

Fluids handled

OMEGA / OMEGA V pumps are designed for pumping water and other fluids with a low solids content. The pumps are very versatile and can be used for the following fluids, for example:

- Brackish water
- River water, lake water and groundwater
- Stormwater
- Service water
- Fire-fighting water
- Cooling water
- Condensate
- Heating water
- Drinking water

1 For larger flow rates see type series RDLO / RDLOV

2 Depending on the material and size

3 For standard design with internal circulation (see API Plan 01): T ≤ 65 °C [149 °F]
For standard design with external circulation (see API Plan 11): T ≤ 80 °C [176 °F]

Designation

Example: Omega H 200-315 A SC G F 2 ACS

Table 2: Designation key

Code	Description
Omega	Type series
H	Design
4)	Horizontal installation
H	Horizontal installation
V	Vertical installation
200	Nominal discharge nozzle diameter [mm]
315	Nominal impeller diameter [mm]
A	Impeller type
A	A
B	B
C	C
SC	Material variant (⇒ Page 7)
GB	Grey cast iron / bronze
GC	Grey cast iron / chrome steel
SB	Nodular cast iron / bronze
SC	Nodular cast iron / chrome steel
DD ₃₅	Duplex stainless steel / duplex stainless steel
G	Shaft seal
P	Gland packing
G	Single mechanical seal
2G	Double mechanical seal
F	Bearing lubrication
F	Grease
M	Fluid handled
2	Generation
4)	Omega (Generation 1)
2	Omega (Generation 2)
ACS	Design
4)	Standard
ACS	Drinking water to ACS
WRAS	Drinking water to WRAS
NSF61	Drinking water to NSF standards 61 and 372
UBA	Drinking water to UBA
HW	Hot water (fluid temperature > 140 °C)

Impeller type

- Double-entry radial impeller⁵⁾

Pump shaft

- Completely dry shaft
- Shaft protecting sleeves in the seal area

Shaft seal

- Mechanical seal

Only for Omega/Omega V (Generation 1):

- Gland packing

Bearings

For horizontal installation:

- Grease-packed rolling element bearings sealed for life

Vertically installed Omega V (Generation 1):

- Product-lubricated plain bearing at the bottom / rolling element bearings, greased for life, on top

Vertically installed Omega V (Generation 2):

- Rolling element bearing, greased for life, at the bottom / rolling element bearing, greased for life, on top

Design details

Design

- Volute casing pump
- Horizontal installation / vertical installation
- Single-stage
- Nominal discharge nozzle diameter: 80 mm - 400 mm

Pump casing

- Axially split volute casing
- Volute casing with integrally cast pump feet
- Replaceable casing wear rings
- Mating dimensions to EN or ASME

4 Blank

5 Optionally with impeller wear rings

Materials

Table 3: Overview of available materials (standard design)⁶⁾

Part No.	Description	Material variant		
		SB	SC	DD ₃₅ ⁷⁾
For all versions				
102	Volute casing	Nodular cast iron	Nodular cast iron	Duplex stainless steel
211	Pump shaft	Stainless steel	Stainless steel	Duplex stainless steel
234	Impeller	Bronze	Stainless steel	Duplex stainless steel
350.1	Bearing housing	Grey cast iron	Grey cast iron	Grey cast iron
360	Bearing cover	Grey cast iron	Grey cast iron	Grey cast iron
441	Shaft seal housing	Nodular cast iron	Nodular cast iron	Duplex stainless steel
502	Casing wear ring	Bronze	Bronze	Duplex stainless steel
503	Impeller wear ring (optional)	Bronze	Stainless steel	Duplex stainless steel
524.1	Shaft protecting sleeve	Stainless steel	Stainless steel	Duplex stainless steel
For pump sets with product-lubricated plain bearing only: Omega/Omega V (Generation 1) only				
160	Cover	Nodular cast iron	Nodular cast iron	Duplex stainless steel
350.2	Bearing housing	Nodular cast iron	Nodular cast iron	Duplex stainless steel
545	Bearing bush	Silicon carbide	Silicon carbide	Silicon carbide
524.2	Shaft protecting sleeve	Silicon carbide	Silicon carbide	Silicon carbide
550.3	Disc	Stainless steel	Stainless steel	Duplex stainless steel
525.1	Spacer sleeve	Stainless steel	Stainless steel	Duplex stainless steel
For versions with gland packing only: Omega/Omega V (Generation 1) only				
452	Gland	Non-alloy steel	Non-alloy steel	-
455	Stuffing box insert	Bronze	Bronze	-
457	Neck ring	Bronze	Bronze	-
458	Lantern ring	Bronze/ thermosetting plastics ⁸⁾	Bronze/ thermosetting plastics ⁸⁾	-
461	Packing ring	Ramie fibre PTFE-impregnated	Ramie fibre PTFE-impregnated	-
For pump sets with mechanical seal only				
433	Balanced mechanical seal	Carbon/ silicon carbide	Carbon/ silicon carbide	Carbon/ silicon carbide
433	Unbalanced mechanical seal	Silicon carbide / silicon carbide	Silicon carbide / silicon carbide	Silicon carbide / silicon carbide
457.2	Neck ring	Bronze	Bronze	Duplex stainless steel
471	Seal cover	Grey cast iron	Grey cast iron	Duplex stainless steel
525.2	Spacer sleeve ⁹⁾	Stainless steel	Stainless steel	Duplex stainless steel

6 Only for maximum fluid temperatures of T ≤ 65 °C [149 °F] for standard design with internal circulation (see API Plan 01)
Only for maximum fluid temperatures of T ≤ 80 °C [176 °F] for standard design with external circulation (see API Plan 11)

7 For duplex stainless steel with special PREN values contact the manufacturer.

8 For Omega 80-270 / 100-250 / 100-310 only

9 Not for versions with KSB mechanical seal 40M

Table 4: Overview of available materials (hot water variant)

Part No.	Description	Material variant		
		SB	SC ¹⁰⁾	DD ₃₅
For all versions				
102	Volute casing	-	Nodular cast iron	-
211	Pump shaft	-	Stainless steel	-
234	Impeller	-	Stainless steel	-
350.1	Bearing housing	-	Grey cast iron	-
360	Bearing cover	-	Grey cast iron	-
441	Shaft seal housing	-	Nodular cast iron	-
502	Casing wear ring	-	Stainless steel	-
503	Impeller wear ring (optional)	-	-	-
524.1	Shaft protecting sleeve	-	Stainless steel	-
For pump sets with product-lubricated plain bearing only: Omega/Omega V (Generation 1) only				
160	Cover	-	-	-
350.2	Bearing housing	-	-	-
545	Bearing bush	-	-	-
524.2	Shaft protecting sleeve	-	-	-
550.3	Disc	-	-	-
525.1	Spacer sleeve	-	-	-
For versions with gland packing only: Omega/Omega V (Generation 1) only				
452	Gland	-	-	-
455	Stuffing box insert	-	-	-
457	Neck ring	-	-	-
458	Lantern ring	-	-	-
461	Packing ring	-	-	-
For pump sets with mechanical seal only				
433	Balanced mechanical seal	-	Silicon carbide / carbon	-
433	Unbalanced mechanical seal	-	-	-
457.2	Neck ring	-	Stainless steel	-
471	Seal cover	-	Grey cast iron	-
525.2	Spacer sleeve ⁹⁾	-	Stainless steel	-

10 Only permissible for fluid temperatures ≤ 140 °C [284 °F]

Coating and preservation

Table 5: Coating for indoor installation

Coat- ing type	Material variant			Casing			Base frame
	SB	SC	DD ₃₅	Exterior	Interior	Bearing housing	
A1 ¹¹⁾	X	X	–	Epoxy resin base paint, colour RAL 5002 (ultramarine blue) ¹²⁾	Epoxy resin base primer, colour at our discretion	Epoxy resin base paint, colour RAL 5002 (ultramarine blue) ¹²⁾	Epoxy resin base paint, colour RAL 5002 (ultramarine blue) ¹²⁾
A1-E ¹¹⁾¹³⁾	X	X	–	Epoxy resin base paint, colour RAL 5002 (ultramarine blue) ¹²⁾	Epoxy resin base paint, colour RAL 5015 (sky blue) ¹⁴⁾	Epoxy resin base paint, colour RAL 5002 (ultramarine blue) ¹²⁾	Epoxy resin base paint, colour RAL 5002 (ultramarine blue) ¹²⁾
B1-E ¹¹⁾	–	–	X	Epoxy resin base paint, colour RAL 5002 (ultramarine blue) ¹²⁾	None; sand-blasted SA 2 ½	Epoxy resin base paint, colour RAL 5002 (ultramarine blue) ¹²⁾	Epoxy resin base paint, colour RAL 5002 (ultramarine blue) ¹²⁾

Table 6: Coating for outdoor installation

Coat- ing type	Material variant			Casing			Base frame
	SB	SC	DD ₃₅	Exterior	Interior	Bearing housing	
A2	X	X	–	Polyurethane base paint, colour RAL 5002 (ultramarine blue) ¹⁵⁾	Epoxy resin base primer, colour at our discretion	Polyurethane base paint, colour RAL 5002 (ultramarine blue) ¹⁵⁾	Polyurethane base paint, colour RAL 5002 (ultramarine blue) ¹⁵⁾
A2-E ¹¹⁾¹³⁾	X	X	–	Polyurethane base paint, colour RAL 5002 (ultramarine blue) ¹⁵⁾	Epoxy resin base paint, colour RAL 5015 (sky blue) ¹⁴⁾	Polyurethane base paint, colour RAL 5002 (ultramarine blue) ¹⁵⁾	Polyurethane base paint, colour RAL 5002 (ultramarine blue) ¹⁵⁾
B2-E ¹¹⁾	–	–	X	Polyurethane base paint, colour RAL 5002 (ultramarine blue) ¹⁵⁾	None; sand-blasted SA 2 ½	Polyurethane base paint, colour RAL 5002 (ultramarine blue) ¹⁵⁾	Polyurethane base paint, colour RAL 5002 (ultramarine blue) ¹⁵⁾

- 11** Only for maximum fluid temperatures of $T \leq 65^\circ\text{C}$ [149 °F] for standard design with internal circulation (see API Plan 01)
Only for maximum fluid temperatures of $T \leq 80^\circ\text{C}$ [176 °F] for standard design with external circulation (see API Plan 11)
- 12** For indoor use in industry and in a marine atmosphere; other colours only in coating variants A2, B2 and on request.
- 13** Surcharge
- 14** Approved for drinking water (KTW, DVGW, ACS). The impeller and rotor components are not coated. No other colours available.
Maximum permissible fluid temperature for drinking water approved coating = 60°C [140 °F]. Only approved for drinking water up to 25°C [77 °F] max.
- 15** For indoor use and outdoor use in industry and in a marine atmosphere; other colours are available on request.

Product benefits

- **High operating reliability**
 - The double-entry impeller balances axial thrust, reducing the loads acting on the rolling element bearings.
 - The pump casing's double-volute design balances radial forces, ensuring low vibration levels during operation.
- **Low maintenance costs**
 - Long service life of the rolling element bearings, sealing elements and coupling thanks to a short, rigid shaft and the spring-loaded bearing arrangement
 - Corrosion and abrasion-resistant materials make for maximum service lives of shaft protecting sleeves, casing wear rings and impeller wear rings as well as of the impeller.
- **Service-friendly design**
 - Fast and easy to assemble thanks to self-centring components such as rotor, mechanical seal, upper casing half, bearing housings and seal housing
 - The hexagon head bolts used are easy to remove, enabling fast maintenance. The casing split flange provides direct access to the inside of the pump.
- **Reliable sealing**
 - The solid casing split flange on the upper casing half and lower casing half ensures reliable and trouble-free sealing of the casing halves.
- **Energy-efficient operation**
 - High efficiencies reduce energy costs during operation.
 - The double-volute casing and the rigid shaft enable a compact, energy-efficient design.
 - The hydraulic system is optimised for high speeds.

Certifications

Table 7: Overview

Label	Effective in:	Comment
	France	Approved in accordance with the French drinking water regulation
	USA	Approved in accordance with US drinking water regulations

Acceptance inspections/tests

- Functional and acceptance tests
 - For information on acceptance tests and inspections refer to the QCPs (see KSB Standard ZN56555-1A / ZN56555-1B / ZN56555-1C)
- Quality assurance system
 - DIN ISO 9001 / EN 29001

Selection information

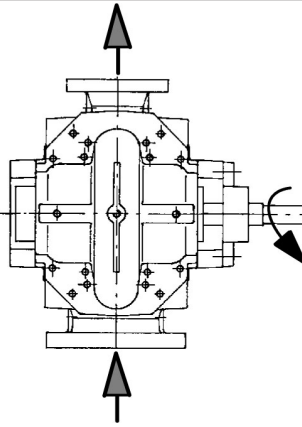
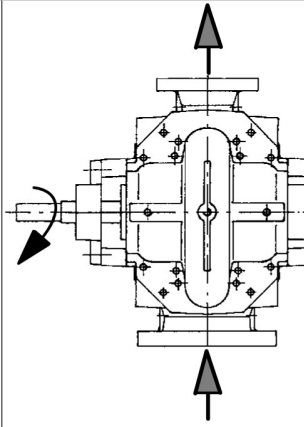
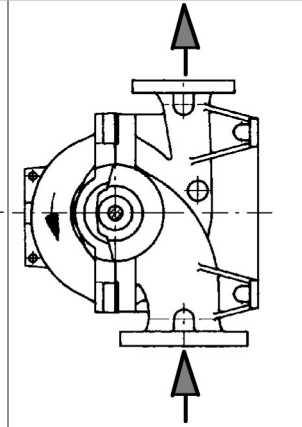
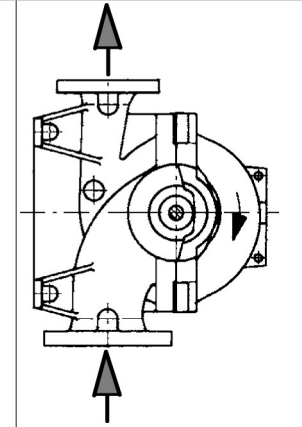
Solids content

Table 8: Solids content by shaft seal and material variant in [ppm] or [mg/l]

Shaft seal	Material variant			
	Max. permissible solids content for variants without cyclone separator		Max. permissible solids content for variants with barrier and flushing water line with cyclone separator ¹⁶⁾	
	Nodular cast iron (SB/SC)	Cast steel (DD ₃₅)	Nodular cast iron (SB/SC)	Cast steel (DD ₃₅)
Gland packing	50	50	100	100
Unbalanced mechanical seal	50	50	100	100
Balanced mechanical seal	50	50	100	100

Directions of rotation and flow

Table 9: Directions of rotation and flow

Horizontal installation		Vertical installation	
Direction of rotation when looking at the shaft stub "left" = anti-clockwise	Direction of rotation when looking at the shaft stub "right" = clockwise	Direction of rotation when looking at the shaft stub "left" = anti-clockwise	Direction of rotation when looking at the shaft stub "right" = clockwise
			

The pumps are designed symmetrically, which means that the designs for clockwise and anti-clockwise rotation are identical. The direction of rotation can be reversed at a later stage without retrofitting or modifying components.

Overview of product features / selection tables

Standard design

Table 10: Symbols key

Symbol	Description
-	Selection unavailable
•	Standard design
■	Standard variant ¹⁷⁾
○	Special design ¹⁷⁾
□	On request ¹⁷⁾

Table 11: Overview of product features of the standard design¹⁸⁾

Features		Material variant			Installation type				
		SB	SC	DD ₃₅	Omega		Omega V		
					Fig. 0	3E	DB/DK	DP/DM	DJ
Acceptance inspections/tests for Omega/Omega V (Generation 1, Generation 2) ¹⁹⁾									
Hydraulic acceptance test to KSB standard DIN ISO 9906 - 2B (equivalent to ANSI HI 14.6-2011/2B)	Non-witnessed	■	■	■	■	■	■	■	■
	Witnessed	○	○	○	○	○	○	○	○
Hydraulic acceptance test to DIN ISO 9906 - 1B (equivalent to ANSI HI 14.6-2011/1B)	Non-witnessed	■	■	■	■	■	■	■	■
	Witnessed	○	○	○	○	○	○	○	○
Hydraulic acceptance test to DIN ISO 9906 - 1U (equivalent to ANSI HI 14.6-2011/1U or Hydraulic Institute A)	Non-witnessed	■	■	■	■	■	■	■	■
	Witnessed	○	○	○	○	○	○	○	○
NPSH test (to DIN ISO 9906 or Hydraulic Institute)	Non-witnessed	■	■	■	■	■	■	■	■
	Witnessed	○	○	○	○	○	○	○	○
Noise measurement	Non-witnessed	■	■	■	■	■	■	■	■
	Witnessed	○	○	○	○	○	○	○	○
Vibration test	Non-witnessed	■	■	■	■	■	■	■	■
	Witnessed	○	○	○	○	○	○	○	○
Bearing temperature measurement	Non-witnessed	○	○	○	○	○	○	○	○
	Witnessed	○	○	○	○	○	○	○	○
Visual inspection after test run (strip test)	Non-witnessed	■	■	■	■	■	■	■	■
	Witnessed	○	○	○	○	○	○	○	○
Hydrostatic test	Non-witnessed	■	■	■	■	■	■	■	■
	Witnessed	○	○	○	○	○	○	○	○
Impeller balancing test	Non-witnessed	○	○	○	○	○	○	○	○
	Witnessed	○	○	○	○	○	○	○	○
Coating inspection	Non-witnessed	○	○	○	○	○	○	○	○
	Witnessed	○	○	○	○	○	○	○	○
Dimensional inspection	Non-witnessed	○	○	○	○	○	○	○	○
	Witnessed	○	○	○	○	○	○	○	○
Coating of Omega/Omega V (Generation 1, Generation 2)									
Coating for indoor installation (KSB blue / RAL 5002)		●	●	●	●	●	●	●	●
Coating for outdoor installation (KSB blue / RAL 5002)		○	○	○	○	○	○	○	○
Drinking water approved coating (can be selected for fluid temperatures ≤ 60 °C)		○	○	○	○	○	○	○	○
Coating for outdoor installation (special colour)		○	○	○	○	○	○	○	○
Special coating (customised coating system / coating composition)		□	□	□	□	□	□	□	□
Installation parts for Omega/Omega V (Generation 1, Generation 2)									
Without installation parts		●	●	●	●	-	-	-	-
Base frame for pump and motor, including chemical anchors ²⁰⁾		●	●	●	-	●	-	-	-

17 Surcharge and longer delivery time

18 Only for maximum fluid temperatures of T ≤ 65 °C [149 °F] for standard design with internal circulation (see API Plan 01)
Only for maximum fluid temperatures of T ≤ 80 °C [176 °F] for standard design with external circulation (see API Plan 11)

19 For more detailed information see ZN56555/1A, ZN56555/1B, ZN56555/1C.

20 Only supplied assembled as a pump set up to motor size ≤ IEC 280M or NEMA 444/5T or max. total weight ≤ 1500 kg [3307 lb].

Features	Material variant			Installation type				
	SB	SC	DD ₃₅	Omega		Omega V		
				Fig. 0	3E	DB/DK	DP/DM	DJ
Special base frame for pump and motor, including chemical anchors	○	○	○	-	○	-	-	-
Pump foundation (pump foot), including foundation blocks and drive lantern	●	●	●	-	-	●	●	-
Special design of pump foundation (pump foot) including foundation blocks and motor pedestal	□	□	□	-	-	□	□	-
Pump foundation (pump foot), including foundation blocks	●	●	●	-	-	-	-	●
Pump foundation (pump foot), including foundation blocks and motor support frame with foundation rails and foundation bolts	□	□	□	-	-	-	-	□
Direction of rotation of Omega/Omega V (Generation 1, Generation 2)								
"Right": clockwise	●	●	●	●	●	●	●	●
"Left": anti-clockwise	●	●	●	●	●	●	●	●
Replacement parts and spare parts								
Replacement parts and spare parts for 2 years of operation	■	■	■	■	■	■	■	■
Flange of Omega/Omega V (Generation 1, Generation 2)								
Drilled to DIN EN 1092 – flat face (type A)	●	●	●	●	●	●	●	●
Drilled to DIN EN 1092 – raised face (type B)	○	○	○	○	○	○	○	○
Drilled to ASME B16 – flat face (type FF)	●	●	●	●	●	●	●	●
Drilled to ASME B16 – raised face (type RF)	○	○	○	○	○	○	○	○
Special flange	□	□	□	□	□	□	□	□
Coupling for Omega/Omega V (Generation 1, Generation 2)								
Without coupling and coupling guard	●	●	●	●	-	-	-	●
	○	○	○	-	○	-	-	-
Torsionally flexible 3-piece jaw coupling (coupling guard not tread-proof)	○	○	○	○	-	-	-	-
	●	●	●	-	●	●	●	-
Torsionally flexible 3-piece jaw coupling (coupling guard tread-proof)	○	○	○	-	○	-	-	-
Torsion-resistant flexible disc coupling with spacer (coupling guard not tread-proof)	○	○	○	○	○	-	-	-
	□	□	□	-	-	□	□	-
Torsion-resistant flexible disc coupling with spacer (coupling guard tread-proof)	○	○	○	-	○	-	-	-
Cardan shaft / coupling with spacer (with/without intermediate bearing)	□	□	□	-	-	-	-	□
Bearings for Omega/Omega V (Generation 1)								
Grease-lubricated rolling element bearing at the drive end (sealed for life)	●	●	●	●	●	●	●	●
Grease-lubricated rolling element bearing at the non-drive end (sealed for life)	●	●	●	●	●	-	-	-
	□	□	□	-	-	□	□	□
Product-lubricated plain bearing at the non-drive end	●	●	-	-	-	●	●	●
Oil-lubricated rolling element bearings at both ends	-	-	-	-	-	-	-	-
Bearings for Omega/Omega V (Generation 2)								
Grease-lubricated rolling element bearing at the drive end (sealed for life)	-	●	●	●	●	●	●	●
Grease-lubricated rolling element bearing at the non-drive end (sealed for life)	-	●	●	●	●	●	●	●
Product-lubricated plain bearing at the non-drive end	-	-	-	-	-	-	-	-
Oil-lubricated rolling element bearings at both ends	-	-	-	-	-	-	-	-
Motor for Omega/Omega V (Generation 1, Generation 2)								
Without motor	●	●	●	●	●	●	●	●
Low-voltage motor to IEC or NEMA standard (make selected by KSB) ²⁰⁾²¹⁾²²⁾	○	○	○	○	-	-	-	-
	●	●	●	-	●	●	●	●
Low-voltage motor to IEC or NEMA standard (make to KSB standard) ²⁰⁾²¹⁾²²⁾	○	○	○	○	-	-	-	-
	●	●	●	-	●	●	●	●
Special motor (motor size ≤ IEC 280M or ≤ NEMA 444/5T) to customer requirements (make not documented) ²⁰⁾²²⁾	○	○	○	○	○	○	○	○
Special motor (motor size > IEC 280M or > NEMA 444/5T) to customer requirements (make not documented) ²⁰⁾²¹⁾²²⁾²³⁾	○	○	○	○	○	-	-	○
	□	□	□	-	-	□	□	-

- 21** The motor can be supplied by the customer and mounted at the site of installation. Motors supplied by KSB can also be mounted by the customer.
- 22** On request, customer-supplied motors can be mounted by KSB.
- 23** From motor size > IEC 280M or NEMA 444/5T the motor dimensions depend on the make. KSB uses motors made by Siemens/Innomotics. When using other makes or designs the base frame / motor pedestal must be adapted (special base frame).

Features		Material variant			Installation type				
		SB	SC	DD ₃₅	Omega		Omega V		
					Fig. 0	3E	DB/DK	DP/DM	DJ
Wear rings for Omega/Omega V (Generation 1, Generation 2)									
Casing with casing wear rings / impeller without impeller wear rings		●	●	●	●	●	●	●	●
Casing with casing wear rings / impeller with impeller wear rings		■	■	■	■	■	■	■	■
Piping for Omega/Omega V (Generation 1)									
Barrier fluid line / flushing water line made of flexible PTFE (malleable cast iron)		●	●	●	●	●	●	●	●
Barrier fluid line / flushing water line made of flexible PTFE (stainless steel)		○	○	-	○	○	○	○	○
Barrier fluid line / flushing water line made of flexible PTFE (duplex steel)		-	-	●	●	●	●	●	●
Special piping (to customer requirements)		□	□	□	□	□	□	□	□
Piping for Omega/Omega V (Generation 2)									
Barrier fluid line / flushing water line made of flexible PTFE (malleable cast iron)		-	■	■	■	■	■	■	■
Barrier fluid line / flushing water line made of flexible PTFE (stainless steel)		-	○	-	○	○	○	○	○
Barrier fluid line / flushing water line made of flexible PTFE (duplex steel)		-	-	□	□	□	□	□	□
Special piping (to customer requirements)		-	□	□	□	□	□	□	□
Shaft seal for Omega/Omega V (Generation 1)									
Gland packing		●	●	-	●	●	●	●	●
Single mechanical seal (unbalanced)		■	■	■	■	■	■	■	■
Single mechanical seal (balanced)		■	■	■	■	■	■	■	■
Double mechanical seal (tandem arrangement)		□	□	□	□	□	□	□	□
Special shaft seal (make/design different from KSB specifications)		□	□	□	□	□	□	□	□
Shaft seal for Omega/Omega V (Generation 2)									
Gland packing		-	-	-	-	-	-	-	-
Single mechanical seal (unbalanced)		-	●	●	●	●	●	●	●
Single mechanical seal (balanced)		-	□	□	□	□	□	□	□
Double mechanical seal (tandem arrangement)		-	□	□	□	□	□	□	□
Special shaft seal (make/design different from KSB specifications)		-	□	□	□	□	□	□	□
Material certificates to EN 10204 for Omega/Omega V (Generation 1, Generation 2)									
Volute casing (102)	Certificate type 2.2	■	■	■	■	■	■	■	■
	Certificate type 3.1	○	○	○	○	○	○	○	○
Pump shafts (211)	Certificate type 2.2	■	■	■	■	■	■	■	■
	Certificate type 3.1	○	○	○	○	○	○	○	○
Impeller (234)	Certificate type 2.2	■	■	■	■	■	■	■	■
	Certificate type 3.1	○	○	○	○	○	○	○	○
Casing wear ring (502)	Certificate type 2.2	■	■	■	■	■	■	■	■
	Certificate type 3.1	○	○	○	○	○	○	○	○
Impeller wear ring (503)	Certificate type 2.2	■	■	■	■	■	■	■	■
	Certificate type 3.1	○	○	○	○	○	○	○	○
Accessories for Omega/Omega V (Generation 1, Generation 2)									
Cyclone separator		○	○	-	○	○	○	○	○
Manually actuated vent valve (without additional piping) ²⁴⁾		■	■	■	■	■	■	■	■
Automatically actuated vent valve (without additional piping) ²⁴⁾		■	■	■	■	■	■	■	■
Manually actuated drain valves (without additional piping) ²⁴⁾		■	■	■	■	■	■	■	■
PumpMeter		■	■	■	■	■	■	■	■
KSB Guard		■	■	■	■	■	■	■	■
Pt100 temperature sensor ²⁴⁾²⁵⁾		■	■	■	■	■	■	■	■
Limit switch for Pt100 ²⁴⁾²⁵⁾		■	■	■	■	■	■	■	■
Transmitter for Pt100 ²⁴⁾²⁵⁾		■	■	■	■	■	■	■	■
Measuring nipple (SPM) for manual vibration measurement ²⁴⁾²⁵⁾		■	■	■	■	■	■	■	■

24 If no valve or measuring equipment is selected as accessory the corresponding connection is closed with a plug.

25 Measuring equipment is supplied with the pump but not fitted. It has to be connected at the time of commissioning of the pump. This connection is closed with a plug when the pump is supplied.

Features	Material variant			Installation type				
	SB	SC	DD ₃₅	Omega		Omega V		
				Fig. 0	3E	DB/DK	DP/DM	DJ
Vibration sensor including vibration monitoring device ²⁴⁾²⁵⁾	■	■	■	■	■	■	■	■
Pressure gauge nominal diameter 100, including valves (without attenuation) ²⁴⁾²⁵⁾	■	■	-	■	■	■	■	■
Pressure gauge nominal diameter 100, including valves (with attenuation) ²⁴⁾²⁵⁾	■	■	■	■	■	■	■	■

Hot water variant

Table 12: Symbols key

Symbol	Description
-	Selection unavailable
●	Standard design
■	Standard variant ²⁶⁾
○	Special design ²⁶⁾
□	On request ²⁶⁾

Table 13: Overview of product features of the hot water variant²⁷⁾

Features		Material variant			Installation type				
		SB	SC ²⁸⁾	DD ₃₅	Omega		Omega V		
					Fig. 0	3E	DB/DK	DP/DM	DJ
Acceptance inspections/tests for Omega/Omega V (Generation 1, Generation 2) ²⁹⁾									
Hydraulic acceptance test to KSB standard DIN ISO 9906 - 2B (equivalent to ANSI HI 14.6-2011/2B)	Non-witnessed	-	■	-	■	■	■	■	■
	Witnessed	-	○	-	○	○	○	○	○
Hydraulic acceptance test to DIN ISO 9906 - 1B (equivalent to ANSI HI 14.6-2011/1B)	Non-witnessed	-	■	-	■	■	■	■	■
	Witnessed	-	○	-	○	○	○	○	○
Hydraulic acceptance test to DIN ISO 9906 - 1U (equivalent to ANSI HI 14.6-2011/1U or Hydraulic Institute A)	Non-witnessed	-	■	-	■	■	■	■	■
	Witnessed	-	○	-	○	○	○	○	○
NPSH test (to DIN ISO 9906 or Hydraulic Institute)	Non-witnessed	-	■	-	■	■	■	■	■
	Witnessed	-	○	-	○	○	○	○	○
Noise measurement	Non-witnessed	-	■	-	■	■	■	■	■
	Witnessed	-	○	-	○	○	○	○	○
Vibration test	Non-witnessed	-	■	-	■	■	■	■	■
	Witnessed	-	○	-	○	○	○	○	○
Bearing temperature measurement	Non-witnessed	-	○	-	○	○	○	○	○
	Witnessed	-	○	-	○	○	○	○	○
Visual inspection after test run (strip test)	Non-witnessed	-	■	-	■	■	■	■	■
	Witnessed	-	○	-	○	○	○	○	○
Hydrostatic test	Non-witnessed	-	■	-	■	■	■	■	■
	Witnessed	-	○	-	○	○	○	○	○
Impeller balancing test	Non-witnessed	-	○	-	○	○	○	○	○
	Witnessed	-	○	-	○	○	○	○	○
Coating inspection	Non-witnessed	-	○	-	○	○	○	○	○
	Witnessed	-	○	-	○	○	○	○	○
Dimensional inspection	Non-witnessed	-	○	-	○	○	○	○	○
	Witnessed	-	○	-	○	○	○	○	○
Coating of Omega/Omega V (Generation 1, Generation 2)									
Coating for indoor installation (KSB blue / RAL 5002)	-	-	-	-	-	-	-	-	-
Coating for outdoor installation (KSB blue / RAL 5002)	-	○	-	○	○	○	○	○	○
Drinking water approved coating (can be selected for fluid temperatures ≤ 60 °C)	-	-	-	-	-	-	-	-	-
Coating for outdoor installation (special colour)	-	○	-	○	○	○	○	○	○
Special coating (customised coating system / coating composition)	-	□	-	□	□	□	□	□	□
Installation parts for Omega/Omega V (Generation 1, Generation 2)									
Without installation parts	-	●	-	●	-	-	-	-	-
Base frame for pump and motor, including chemical anchors ³⁰⁾	-	■	-	-	■	-	-	-	-
Special base frame for pump and motor, including chemical anchors	-	○	-	-	○	-	-	-	-
Pump foundation (pump foot), including foundation blocks and drive lantern	-	●	-	-	-	●	●		

26 Surcharge and longer delivery time

27 Only for fluid temperature ≤ 140 °C [≤ 284 °F]

28 Max. ≤ 80 °C [176 °F]

29 For more detailed information see ZN56555/1A, ZN56555/1B, ZN56555/1C.

30 Only supplied assembled as a pump set up to motor size ≤ IEC 280M or NEMA 444/5T or max. total weight ≤ 1500 kg [3307 lb].

Features	Material variant			Installation type				
	SB	SC ²⁸⁾	DD ³⁵⁾	Omega		Omega V		
				Fig. 0	3E	DB/DK	DP/DM	DJ
Special design of pump foundation (pump foot) including foundation blocks and motor pedestal	-	□	-	-	-	□	□	-
Pump foundation (pump foot), including foundation blocks	-	●	-	-	-	-	-	●
Pump foundation (pump foot), including foundation blocks and motor support frame with foundation rails and foundation bolts	-	□	-	-	-	-	-	□
Direction of rotation of Omega/Omega V (Generation 1, Generation 2)								
"Right": clockwise	-	●	-	●	●	●	●	●
"Left": anti-clockwise	-	●	-	●	●	●	●	●
Replacement parts and spare parts								
Replacement parts and spare parts for 2 years of operation	-	■	-	■	■	■	■	■
Flange of Omega/Omega V (Generation 1, Generation 2)								
Drilled to DIN EN 1092 – flat face (type A)	-	●	-	●	●	●	●	●
Drilled to DIN EN 1092 – raised face (type B)	-	○	-	○	○	○	○	○
Drilled to ASME B16 – flat face (type FF)	-	●	-	●	●	●	●	●
Drilled to ASME B16 – raised face (type RF)	-	○	-	○	○	○	○	○
Special flange	-	□	-	□	□	□	□	□
Coupling for Omega/Omega V (Generation 1, Generation 2)								
Without coupling and coupling guard	-	●	-	●	-	-	-	●
	-	○	-	-	○	-	-	-
Torsionally flexible 3-piece jaw coupling (coupling guard not tread-proof)	-	-	-	-	-	-	-	-
	-	-	-	-	-	-	-	-
Torsionally flexible 3-piece jaw coupling (coupling guard tread-proof)	-	-	-	-	-	-	-	-
	-	-	-	-	-	-	-	-
Torsion-resistant flexible disc coupling with spacer (coupling guard not tread-proof)	-	■	-	■	■	-	-	-
	-	□	-	-	-	□	□	-
Torsion-resistant flexible disc coupling with spacer (coupling guard tread-proof)	-	□	-	-	○	-	-	-
	-	□	-	-	-	-	-	-
Cardan shaft / coupling with spacer (with/without intermediate bearing)	-	□	-	-	-	-	-	□
Bearings for Omega/Omega V (Generation 1)								
Grease-lubricated rolling element bearing at the drive end (sealed for life)	-	●	-	●	●	●	●	●
Grease-lubricated rolling element bearing at the non-drive end (sealed for life)	-	●	-	●	●	-	-	-
	-	□	-	-	-	□	□	□
Product-lubricated plain bearing at the non-drive end	-	-	-	-	-	-	-	-
Oil-lubricated rolling element bearings at both ends	-	-	-	-	-	-	-	-
Bearings for Omega/Omega V (Generation 2)								
Grease-lubricated rolling element bearing at the drive end (sealed for life)	-	●	-	●	●	●	●	●
Grease-lubricated rolling element bearing at the non-drive end (sealed for life)	-	●	-	●	●	●	●	●
Product-lubricated plain bearing at the non-drive end	-	-	-	-	-	-	-	-
Oil-lubricated rolling element bearings at both ends	-	-	-	-	-	-	-	-
Motor for Omega/Omega V (Generation 1, Generation 2)								
Without motor	-	●	-	●	●	●	●	●
Low-voltage motor to IEC or NEMA standard (make selected by KSB) ³⁰⁾³¹⁾³²⁾	-	○	-	○	-	-	-	-
	-	●	-	-	●	●	●	●
Low-voltage motor to IEC or NEMA standard (make to KSB standard) ³⁰⁾³¹⁾³²⁾	-	○	-	○	-	-	-	-
	-	●	-	-	●	●	●	●
Special motor (motor size ≤ IEC 280M or ≤ NEMA 444/5T) to customer requirements (make not documented) ³⁰⁾³²⁾	-	○	-	○	○	○	○	○
Special motor (motor size > IEC 280M or > NEMA 444/5T) to customer requirements (make not documented) ³⁰⁾³¹⁾³²⁾³³⁾	-	○	-	○	○	-	-	○
	-	□	-	-	-	□	□	-
Wear rings for Omega/Omega V (Generation 1, Generation 2)								
Casing with casing wear rings / impeller without impeller wear rings	-	●	-	●	●	●	●	●

- 31** The motor can be supplied by the customer and mounted at the site of installation. Motors supplied by KSB can also be mounted by the customer.
- 32** On request, customer-supplied motors can be mounted by KSB.
- 33** From motor size > IEC 280M or NEMA 444/5T the motor dimensions depend on the make. KSB uses motors made by Siemens/Innomotics. When using other makes or designs the base frame / motor pedestal must be adapted (special base frame).

Features		Material variant			Installation type				
		SB	SC ²⁸⁾	DD ³⁵⁾	Omega		Omega V		
					Fig. 0	3E	DB/DK	DP/DM	DJ
Casing with casing wear rings / impeller with impeller wear rings		-	■	-	■	■	■	■	■
Piping for Omega/Omega V (Generation 1)									
Barrier fluid line / flushing water line made of flexible PTFE (malleable cast iron)		-	●	-	●	●	●	●	●
Barrier fluid line / flushing water line made of flexible PTFE (stainless steel)		-	○	-	○	○	○	○	○
Barrier fluid line / flushing water line made of flexible PTFE (duplex steel)		-	-	-	-	-	-	-	-
Special piping (to customer requirements)		-	□	-	□	□	□	□	□
Piping for Omega/Omega V (Generation 2)									
Barrier fluid line / flushing water line made of flexible PTFE (malleable cast iron)		-	■	-	■	■	■	■	■
Barrier fluid line / flushing water line made of flexible PTFE (stainless steel)		-	○	-	○	○	○	○	○
Barrier fluid line / flushing water line made of flexible PTFE (duplex steel)		-	-	-	-	-	-	-	-
Special piping (to customer requirements)		-	□	-	□	□	□	□	□
Shaft seal for Omega/Omega V (Generation 1)									
Gland packing		-	-	-	-	-	-	-	-
Single mechanical seal (unbalanced)		-	-	-	-	-	-	-	-
Single mechanical seal (balanced)		-	■	-	■	■	■	■	■
Double mechanical seal (tandem arrangement)		-	□	-	□	□	□	□	□
Special shaft seal (make/design different from KSB specifications)		-	□	-	□	□	□	□	□
Shaft seal for Omega/Omega V (Generation 2)									
Gland packing		-	-	-	-	-	-	-	-
Single mechanical seal (unbalanced)		-	-	-	-	-	-	-	-
Single mechanical seal (balanced)		-	■	-	■	■	■	■	■
Double mechanical seal (tandem arrangement)		-	-	-	-	-	-	-	-
Special shaft seal (make/design different from KSB specifications)		-	□	-	□	□	□	□	□
Material certificates to EN 10204 for Omega/Omega V (Generation 1, Generation 2)									
Volute casing (102)	Certificate type 2.2	-	■	-	■	■	■	■	■
	Certificate type 3.1	-	○	-	○	○	○	○	○
Pump shafts (211)	Certificate type 2.2	-	■	-	■	■	■	■	■
	Certificate type 3.1	-	○	-	○	○	○	○	○
Impeller (234)	Certificate type 2.2	-	■	-	■	■	■	■	■
	Certificate type 3.1	-	○	-	○	○	○	○	○
Casing wear ring (502)	Certificate type 2.2	-	■	-	■	■	■	■	■
	Certificate type 3.1	-	○	-	○	○	○	○	○
Impeller wear ring (503)	Certificate type 2.2	-	■	-	■	■	■	■	■
	Certificate type 3.1	-	○	-	○	○	○	○	○
Accessories for Omega/Omega V (Generation 1, Generation 2)									
Cyclone separator		-	-	-	-	-	-	-	-
Manually actuated vent valve (without additional piping) ³⁴⁾		-	■ ³⁵⁾	-	■ ³⁵⁾	■ ³⁵⁾	■ ³⁵⁾	■ ³⁵⁾	■ ³⁵⁾
Automatically actuated vent valve (without additional piping) ³⁴⁾		-	-	-	-	-	-	-	-
Manually actuated drain valves (without additional piping) ³⁴⁾		-	■	-	■	■	■	■	■
PumpMeter		-	-	-	-	-	-	-	-
KSB Guard		-	-	-	-	-	-	-	-
Pt100 temperature sensor ³⁴⁾³⁶⁾		-	■	-	■	■	■	■	■
Limit switch for Pt100 ³⁴⁾³⁶⁾		-	■	-	■	■	■	■	■
Transmitter for Pt100 ³⁴⁾³⁶⁾		-	■	-	■	■	■	■	■
Measuring nipple (SPM) for manual vibration measurement ³⁴⁾³⁶⁾		-	■	-	■	■	■	■	■
Vibration sensor including vibration monitoring device ³⁴⁾³⁶⁾		-	■	-	■	■	■	■	■
Pressure gauge nominal diameter 100, including valves (without attenuation) ³⁴⁾³⁶⁾		-	■	-	■	■	■	■	■
Pressure gauge nominal diameter 100, including valves (with attenuation) ³⁴⁾³⁶⁾		-	■	-	■	■	■	■	■

34 If no valve or measuring equipment is selected as accessory the corresponding connection is closed with a plug.

35 Only permissible up to 16 bar [227 psi] (operating pressure)

36 Measuring equipment is supplied with the pump but not fitted. It has to be connected at the time of commissioning of the pump. This connection is closed with a plug when the pump is supplied.

Overview of sizes

The components of a shaft unit are only interchangeable within the same type series generation.

Table 14: Overview of Omega/Omega V sizes (Generation 1)

Size	Shaft unit	Omega/Omega V (Generation 1)
080-270	DW40	X
100-250	DW40	X
100-310	DW40	X
125-230	DW50	X
125-290	DW50	X
125-500	DW50	X
150-290	DW50	X
150-360	DW50	X
150-460	DW60	X
150-605	DW60	X
200-320	DW60	X
200-330	DW60	X
200-420	DW60	X
200-520	DW70	X
200-670	DW70	X
250-370	DW70	X
250-450	DW80	X
250-600	DW80	X
250-800	DW90	X
300-300	DW70	X
300-435	DW80	X
300-560	DW90	X
300-700	DW90	X
350-360	DW80	X
350-430	DW90	X
350-510	DW90	X
400-500	DW90	X

Table 15: Overview of Omega/Omega V sizes (Generation 2)

Size	Shaft unit	Omega/Omega V (Generation 2)
100-225	DW40.1	X
100-285	DW40.1	X
125-220	DW40.1	X
125-270	DW40.1	X
150-215	DW40.2	X
150-265	DW40.2	X
150-335	DW50.1	X
200-250	DW40.3	X
200-315	DW50.1	X
200-325	DW50.2	X
200-335	DW50.1	X
200-380	DW50.3	X
250-295	DW50.3	X
250-335	DW50.3	X
250-365	DW50.3	X
250-455	DW60.2	X
250-555	DW80.1	X
300-375	DW60.3	X
300-440	DW60.3	X
300-690	DW80.1	X

Size	Shaft unit	Omega/Omega V (Generation 2)
350-540	DW70.1	X
400-430	DW70.1	X
400-530	DW80.2	X

Related documents

- General Arrangement Drawings DIN /IEC motors 1384.3940
- General Arrangement Drawings NEMA motors 1384.3946
- Characteristic Curves Booklet 50 Hz 1384.450
- Characteristic Curves Booklet 60 Hz 1384.460

Specifications required for enquiries/orders**Pump:**

- Pump designation
- Maximum and minimum inlet pressure
- Flow rate Q, head H_{total}
- Flange design
- Shaft seal
- Type of fluid handled and fluid temperature
- Solids content
- Direction of rotation / motor position
- Accessories required
- Special inspections and acceptance tests
- Quantity and language of operating manuals

Drive (selected by KSB):


- Type of construction
- Enclosure
- Voltage, frequency, starting method
- Ambient temperature
- Thermal class
- Accessories required

Drive (selected by customer):


- Binding data sheet with motor dimensions and effective speed

Selection charts


Omega/Omega V (Generation 1), 50 Hz, n = 2980 rpm

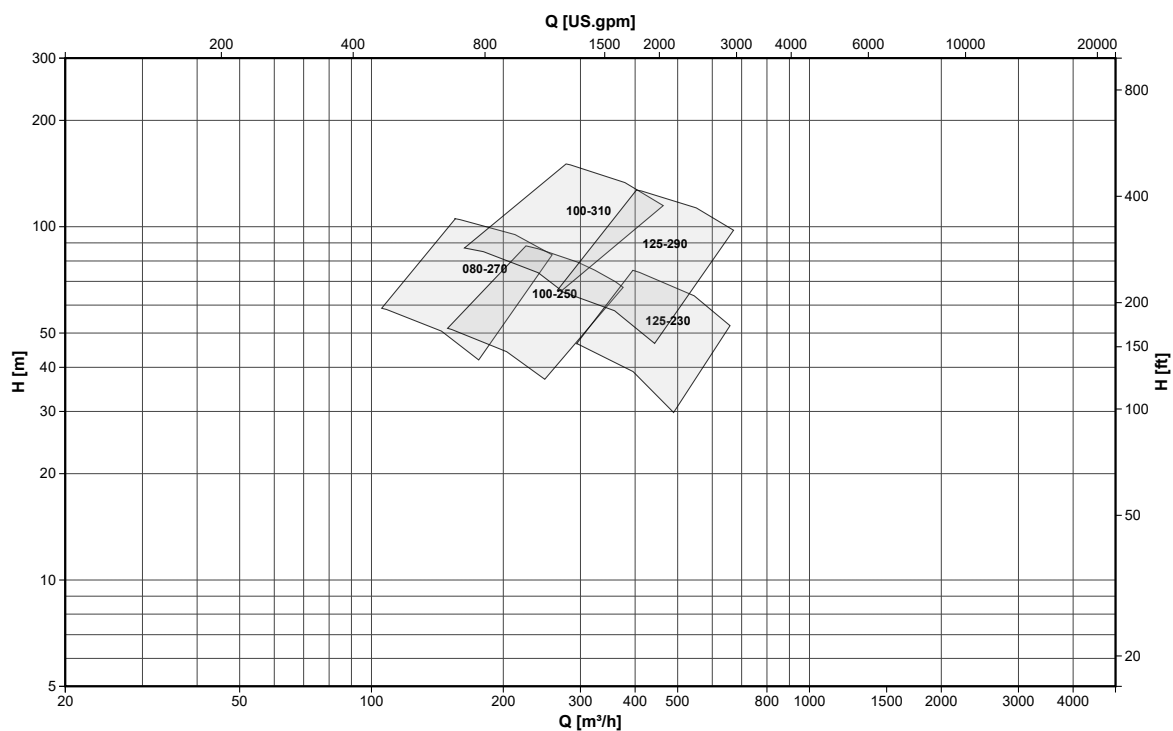


Omega/Omega V (Generation 2), 50 Hz, n = 2980 rpm

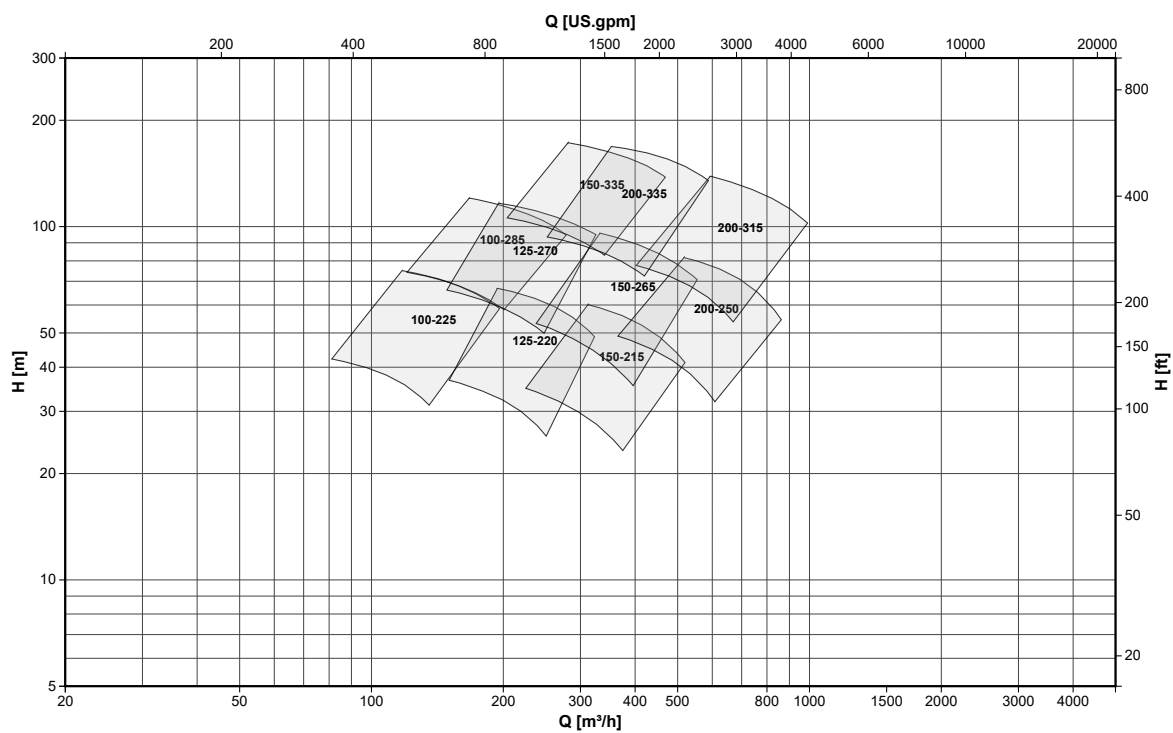


Omega/Omega V (Generation 1), 50 Hz, n = 1490 rpm

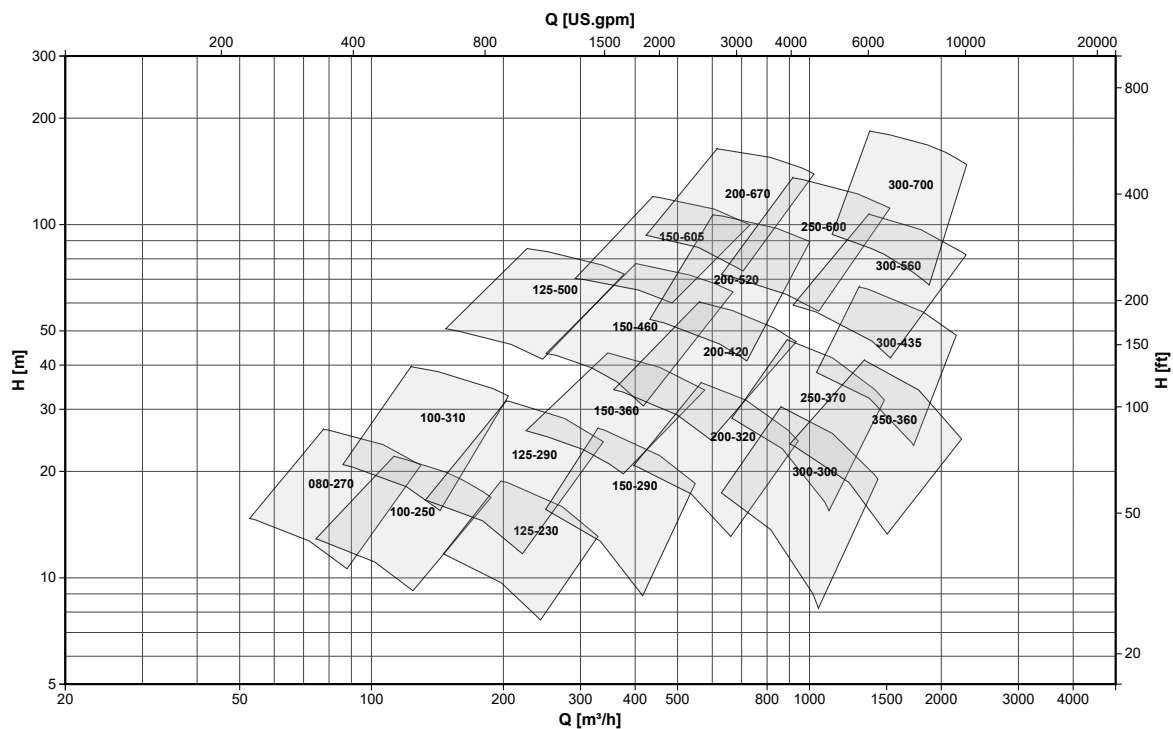


Omega/Omega V (Generation 2), 50 Hz, n = 1490 rpm

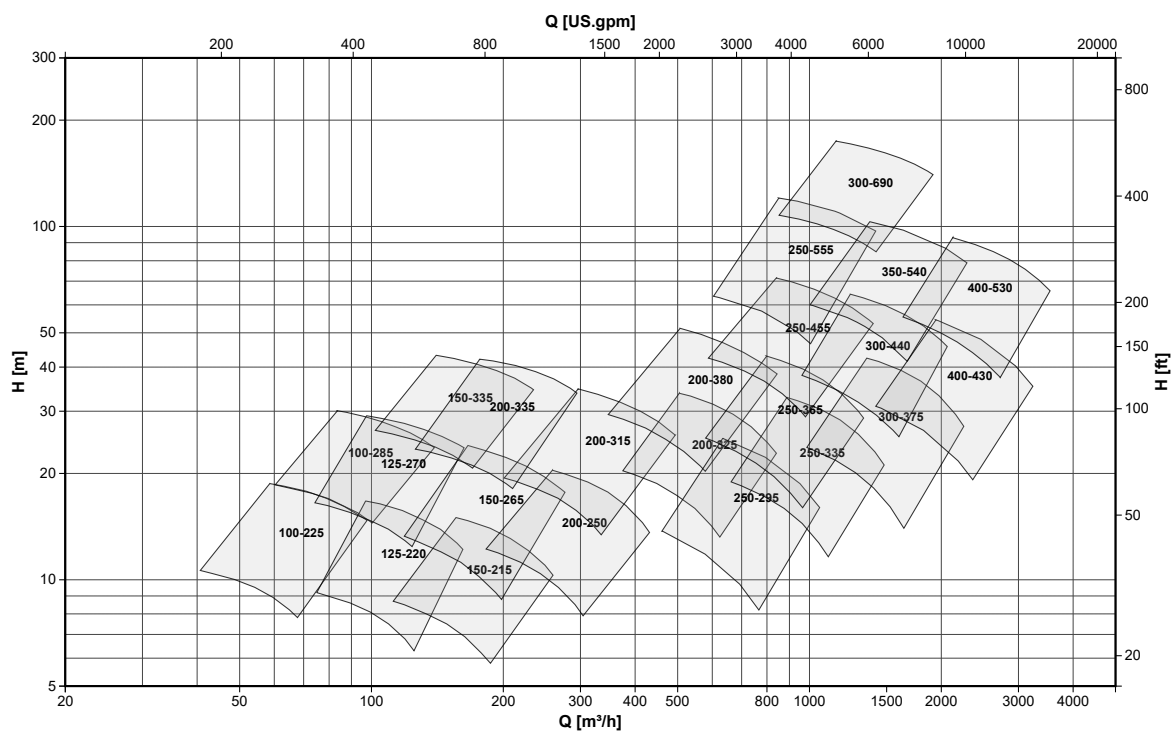


Omega/Omega V (Generation 1), 60 Hz, n = 3550 rpm

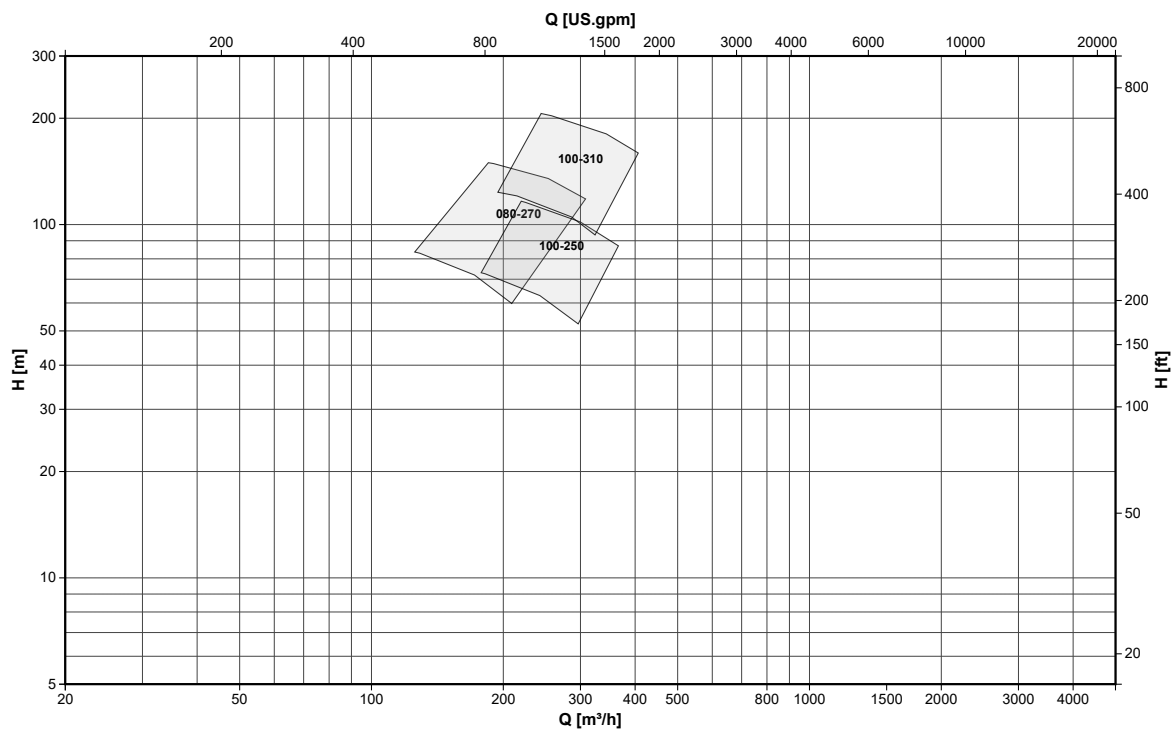


Omega/Omega V (Generation 2), 60 Hz, n = 3550 rpm

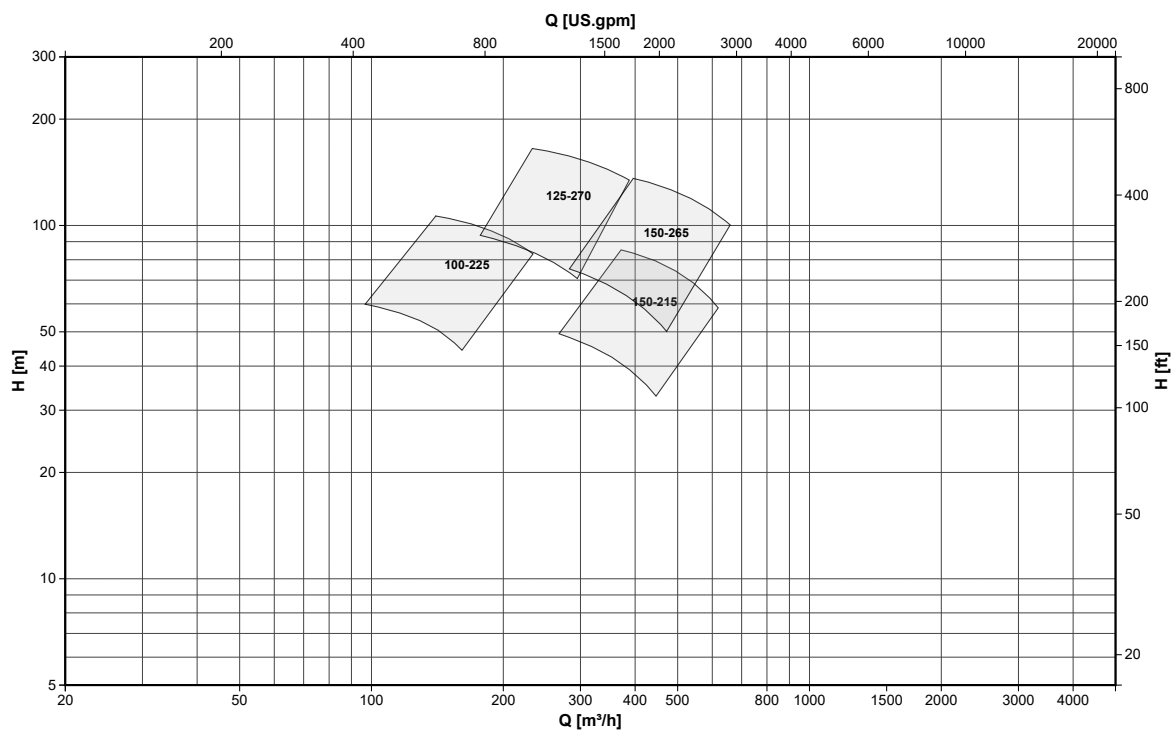

Omega/Omega V (Generation 1), 60 Hz, n = 1785 rpm

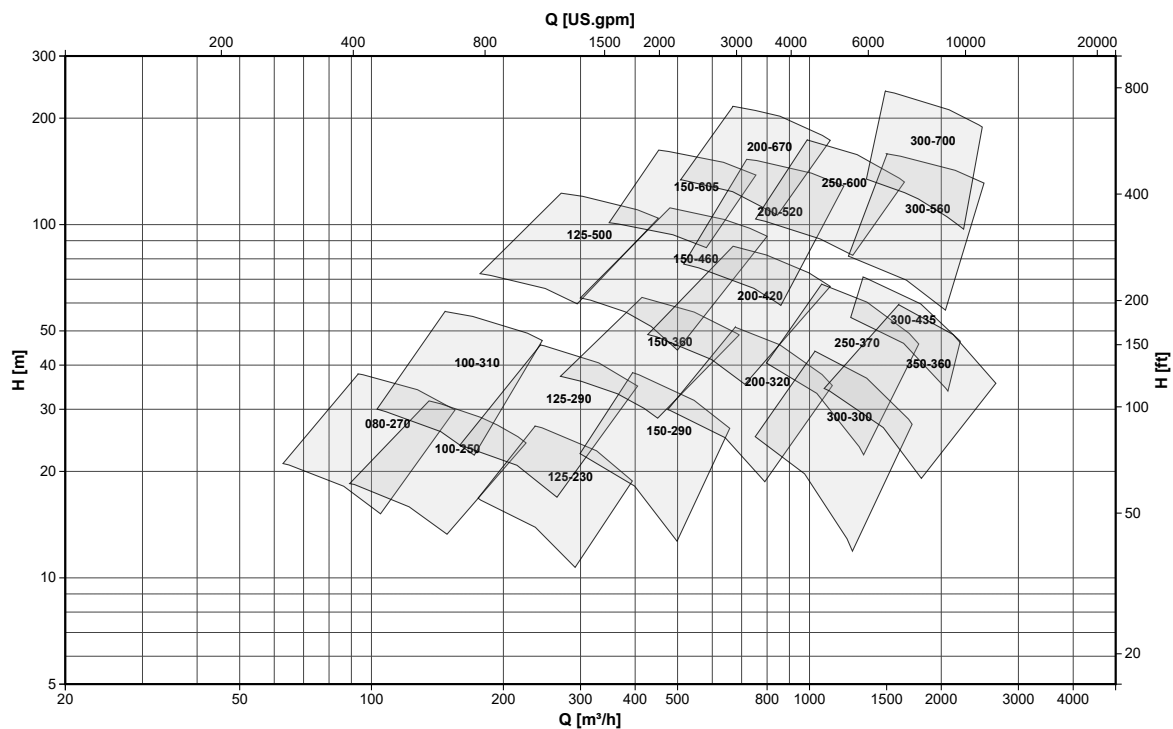

Omega/Omega V (Generation 2), 60 Hz, n = 1785 rpm

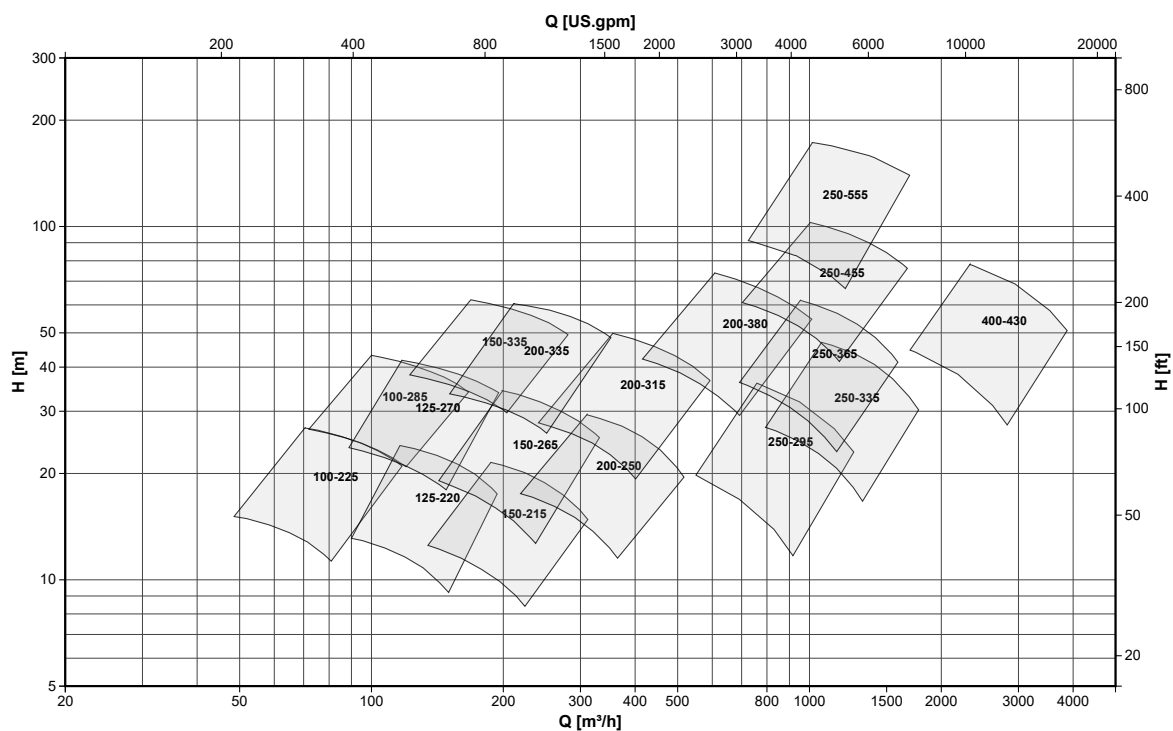

Types of installation

Fig.0

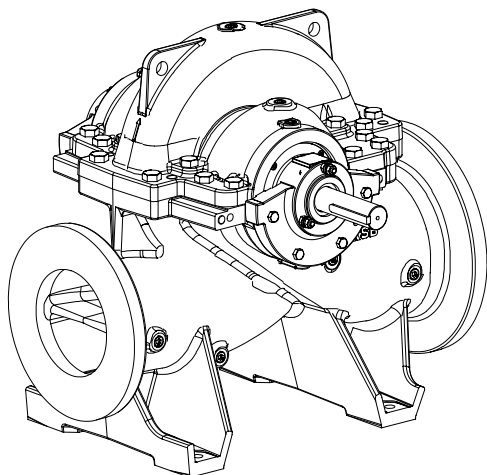


Fig. 1: Fig. 0: Bare-shaft pump

Options of installation parts:

- None

Coupling options:

- Torsionally flexible jaw coupling
- Torsion-resistant flexible disc coupling (on request)

Coupling guard options:

- Light-duty design, not tread-proof

Delivery/transport:

- Pump

Coupling options:

- Torsionally flexible jaw coupling
- Torsion-resistant flexible disc coupling with spacer³⁸⁾

Coupling guard options:

- Light-duty design, not tread-proof
- Heavy-duty, tread-proof design (on request)

Delivery/transport:

- Up to motor size ≤ IEC 280M or NEMA 444/5T or a max. total weight ≤ 1500 kg [3307 lb] pump and motor are supplied on the base frame.
- From motor size > IEC 280M or NEMA 444/5T or a max. total weight > 1500 kg [3307 lb] pump, motor and base frame are supplied separately.

3E

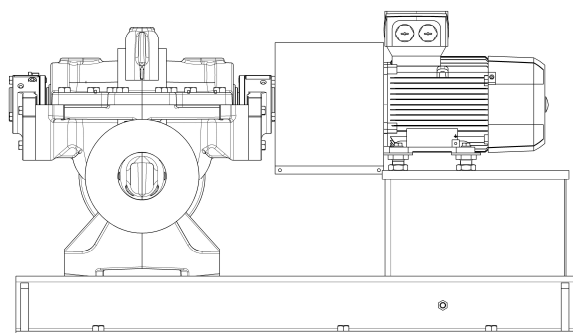


Fig. 2: 3E: Pump and motor on a common base frame


Options of installation parts:

- Base frame for pump and motor, including chemical anchors
- Special base frame for pump and motor, including chemical anchors³⁷⁾

37 On request only: for motors > IEC 280M or NEMA 444/5T and motors outside KSB standard as well as for other customer-specific versions, special base frame for transporting pump sets with motors > IEC 280M or NEMA 444/5T

38 On request only: special base frame required

DB/DK

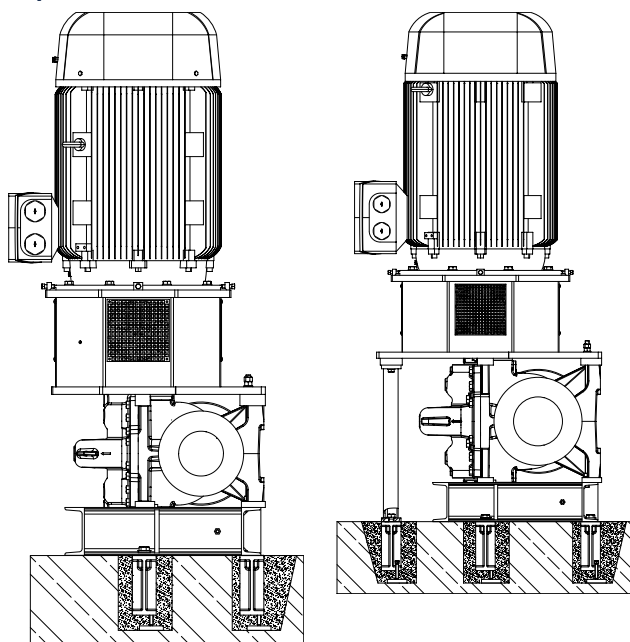

DB installation

DK installation

DB/DK: motor mounted on the drive lantern

Options of installation parts:

- Pump foundation including foundation blocks and drive lantern
- Pump foundation including foundation blocks and special drive lantern³⁹⁾

Coupling options:

- Torsionally flexible jaw coupling
- Torsion-resistant flexible disc coupling with spacer

Coupling guard options:

- Light-duty design, not tread-proof

Delivery/transport:

- Pump supplied on pump foundation with drive lantern mounted. The motor is supplied separately.

DJ

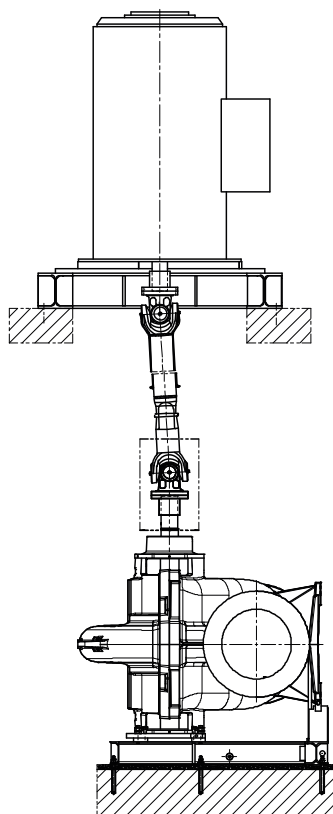


Fig. 3: DJ: Pump and motor on separate levels

Options of installation parts:

- Pump foundation (foot) including foundation blocks
- Pump foundation (foot) including foundation blocks, motor support frame, foundation rails and foundation bolts (on request)

Coupling options:

- Cardan shaft with/without intermediate bearing (on request)
- Coupling with spacer (on request)

Coupling guard options:

- Light-duty design, not tread-proof

Delivery / transport:

- Pump on corresponding pump foot. Motor and motor support frame are supplied separately.

³⁹ On request only: for motors > IEC 280M and/or NEMA 444/5T and motors outside KSB standard as well as for other customer-specific versions, special drive lantern for motors > IEC 280M or NEMA 444/5T

DP/DM

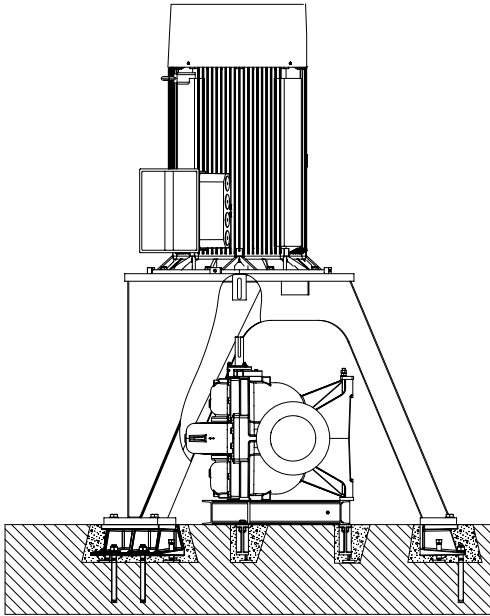


Fig. 4: DP/DM: Motor mounted on separate drive lantern

Options of installation parts:

- Pump base frame (foot) including foundation bolts, and drive lantern (including foundation rails and chemical anchors)

Coupling options:

- Torsionally flexible jaw coupling
- Torsion-resistant flexible disc coupling with spacer⁴⁰⁾

Coupling guard options:

- Light-duty design, not tread-proof

Delivery/transport:

- Pump with pump base frame (foot). Motor and drive lantern are supplied as individual units.

40 On request only: for motors > IEC 280M or outside KSB standard as well as for other customer-specific versions, special drive lantern for motors > IEC 280M

Scope of supply

Omega (Generation 1, Generation 2)

Standard design

- Bare shaft pump (without accessories)
- Casing wear rings
- Grease-packed rolling element bearings
- Installation/operating manual

Only for Omega (Generation 1):

- Shaft sealed by gland packing
- Barrier fluid line / flushing water line made of flexible material, without cyclone separator

Only for Omega (Generation 2):

- Single mechanical seal with internal circulation as shaft seal

Omega V (Generation 1, Generation 2)

Standard design

- Bare shaft pump (without accessories, with pump foundation)
- Casing wear rings
- KSB standard coating for indoor installation
- Installation/operating manual

Only for Omega V (Generation 1):

- One grease-lubricated and one product-lubricated bearing
- Shaft sealed by gland packing
- Barrier fluid line / flushing water line made of flexible material, without cyclone separator

Only for Omega V (Generation 2):

- Grease-packed rolling element bearings
- Single mechanical seal with internal circulation as shaft seal

Completing the pump set:

- For horizontal installation: baseplate / base frame for pump and motor (including foundation bolts)
- For vertical installation: drive lantern stool and foot (including support feet and foundation bolts, depending on the motor size)
- Drive
- Coupling

Coupling guard

Accessories

- KSB Guard
- Barrier fluid line / flushing water line with cyclone separator
- Vent valves and/or drain valves
- Pressure gauges
- Temperature sensor for rolling element bearings (Pt100)
- Limit switch or transmitter for Pt100
- PumpMeter
- SPM nipple or vibration monitoring device

Shipment/transport and packaging

After the pump sets are completely assembled at the factory to be adjusted to specific requirements, they are partly dismantled again for shipment. The assembly status a pump set is supplied in depends on the type of pump set, its dimensions and weight. Pump, baseplate and motor are supplied ex works without packaging. On request, a variety of packaging options can be provided against a surcharge. More information (⇒ Page 25) .

General assembly drawing with list of components

Omega (Generation 1)

Horizontal installation

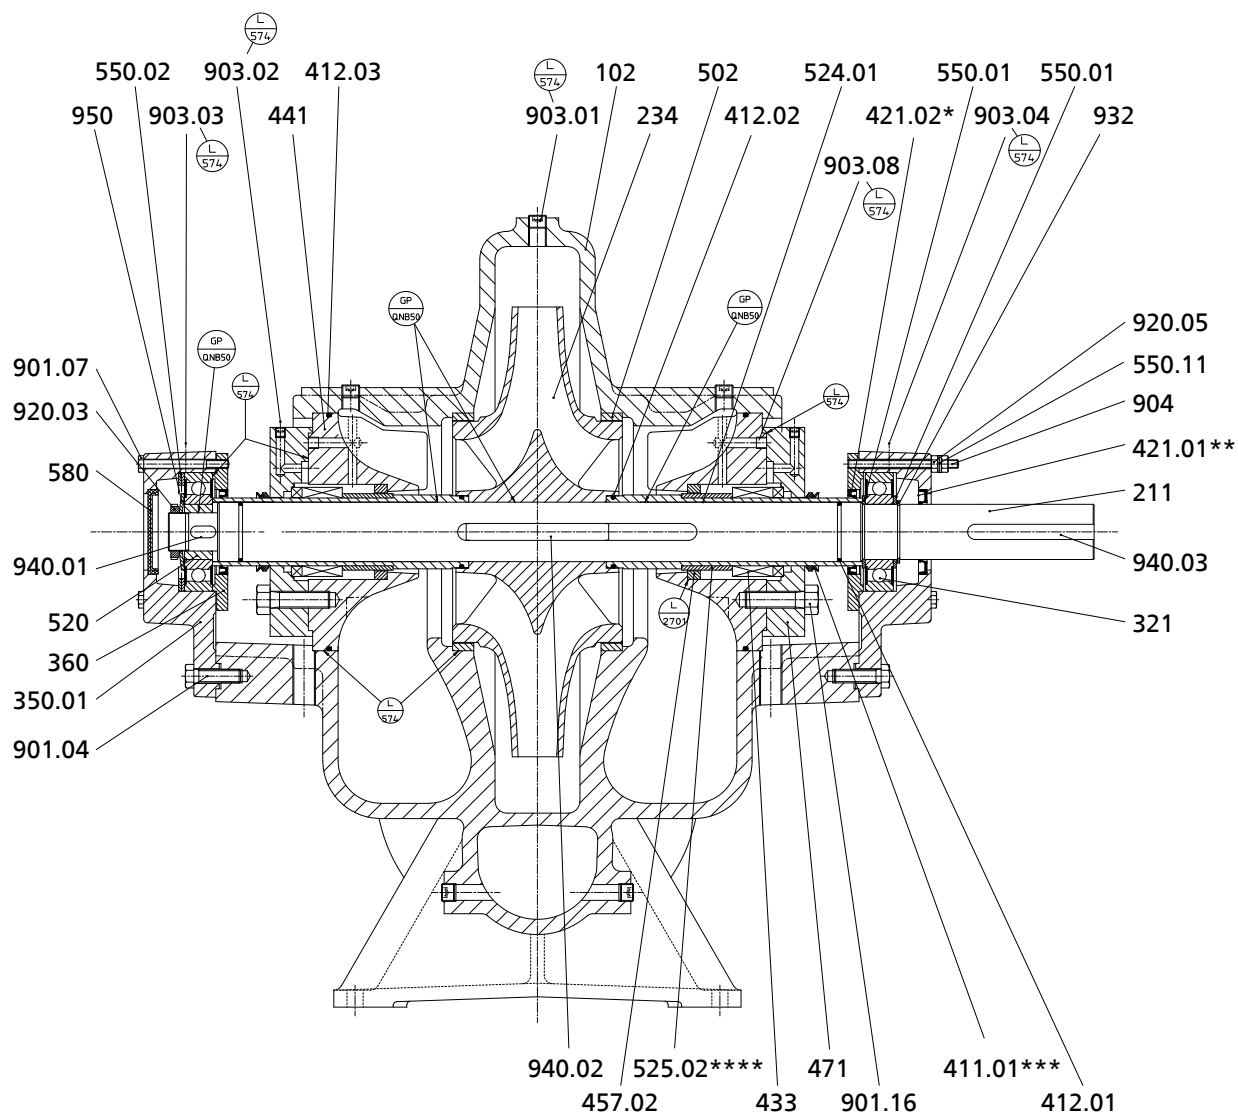


Fig. 5: General assembly drawing of Omega / Omega V (Generation 1), horizontal installation

*	For ATEX-compliant version: labyrinth ring 423.02
**	For ATEX-compliant version: labyrinth ring 423.01
***	Not for ATEX-compliant version
****	Not for version with KSB mechanical seal 40M

Table 16: List of components

Part No.	Description	Part No.	Description
102	Volute casing	502	Casing wear ring
211	Pump shaft	520	Sleeve
234	Impeller	524.01	Shaft protecting sleeve
321	Radial ball bearing	525.02	Spacer sleeve
350.01	Bearing housing	550.01/.02/.11	Disc
360	Bearing cover	580	Cap
411.01	Joint ring	901.04/.07/.16	Hexagon head bolt
412.01/.02/.03	O-ring	903.01/.02/.03/.04/.08	Screw plug
421.01/.02	Lip seal	904	Grub screw
433	Mechanical seal	920.03/.05	Nut

Part No.	Description	Part No.	Description
441	Shaft seal housing	932	Circlip
457.02	Neck ring	940.01/.02/.03	Key
471	Seal cover	950	Spring

Vertical installation

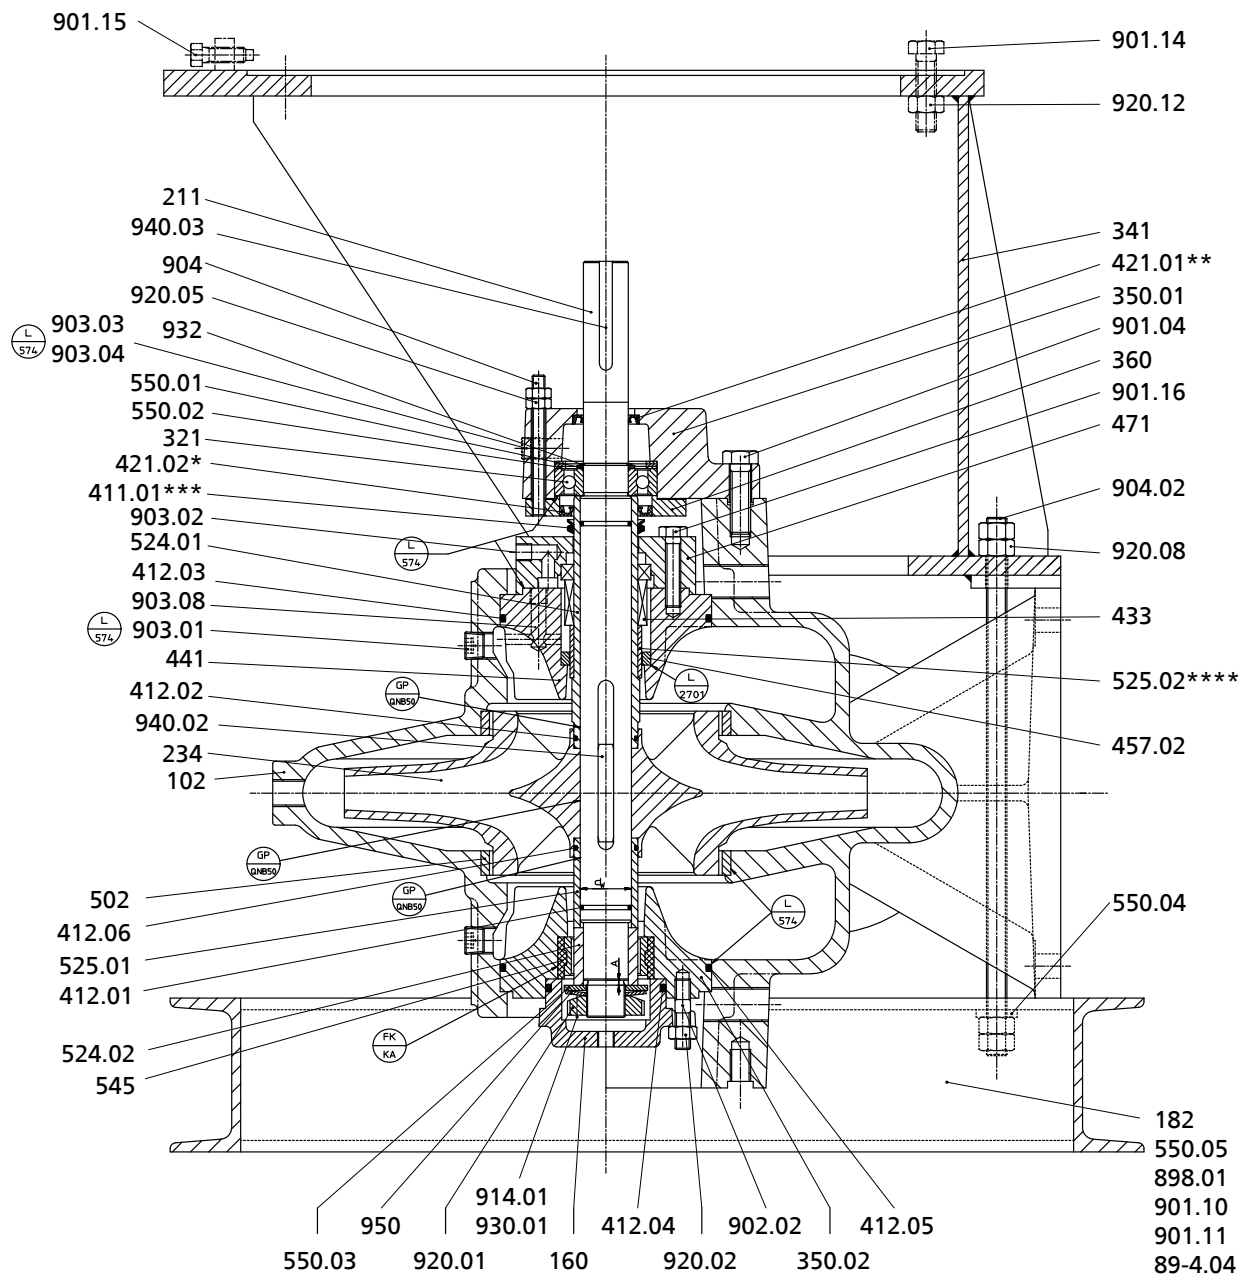


Fig. 6: General assembly drawing of Omega / Omega V (Generation 1), installation type DB

*	For ATEX-compliant version: labyrinth ring 423.02
**	For ATEX-compliant version: labyrinth ring 423.01
***	Not for ATEX-compliant version
****	Not for version with KSB mechanical seal 40M

Table 17: List of components

Part No.	Description	Part No.	Description
102	Volute casing	524.01/.02	Shaft protecting sleeve
160	Cover	525.01/.02	Spacer sleeve
182	Foot	545	Bearing bush
211	Pump shaft	550.01/.02/.03/.04/.05	Disc

Part No.	Description	Part No.	Description
234	Impeller	89-4.04	Shim
321	Radial ball bearing	898.01	Foundation block
341	Drive lantern	901.04/.10/.11/.14/.15/.16	Hexagon head bolt
350.01/.02	Bearing housing	902.02	Stud
360	Bearing cover	903.01/.02/.03/.04/.08	Screw plug
411.01	Joint ring	904.02	Grub screw
412.01/.02/.03/.04/.05/.06	O-ring	914.01	Hexagon socket head cap screw
421.01/.02	Lip seal	920.01/.02/.05/.08/.12	Nut
433	Mechanical seal	930.01	Safety device
441	Shaft seal housing	932	Circlip
457.02	Neck ring	940.02/.03	Key
471	Seal cover	950	Spring
502	Casing wear ring		

Standard variant: gland packing

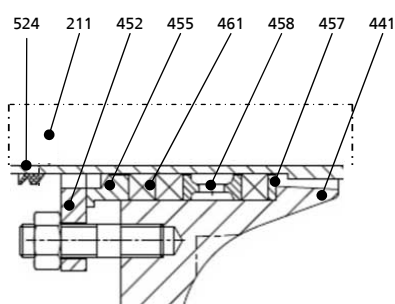


Table 18: List of components

Part No.	Description
211	Pump shaft
441	Shaft seal housing
452	Gland
455	Stuffing box insert
457	Neck ring
458	Lantern ring
461	Packing rings
524	Shaft protecting sleeve

Standard variant: mechanical seal (schematic)

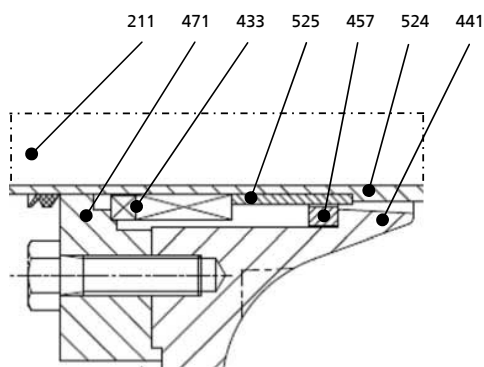


Table 19: List of components

Part No.	Description
211	Pump shaft
433	Mechanical seal
441	Shaft seal housing
457	Neck ring

Part No.	Description
471	Seal cover
524	Shaft protecting sleeve
525	Spacer sleeve

Standard variant: impeller with impeller wear ring




Table 20: List of components

Part No.	Description
234	Double-entry impeller
502	Casing wear ring
503	Impeller wear ring

Standard design: product-lubricated bearing (Omega V)

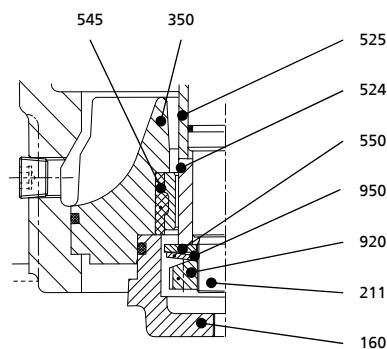


Table 21: List of components

Part No.	Description
160	Cover
211	Pump shaft
350	Bearing housing
524	Shaft protecting sleeve

Part No.	Description
525	Spacer sleeve
545	Bearing bush
550	Disc
920	Nut
950	Disc spring

Omega (Generation 2)

Horizontal installation 3E

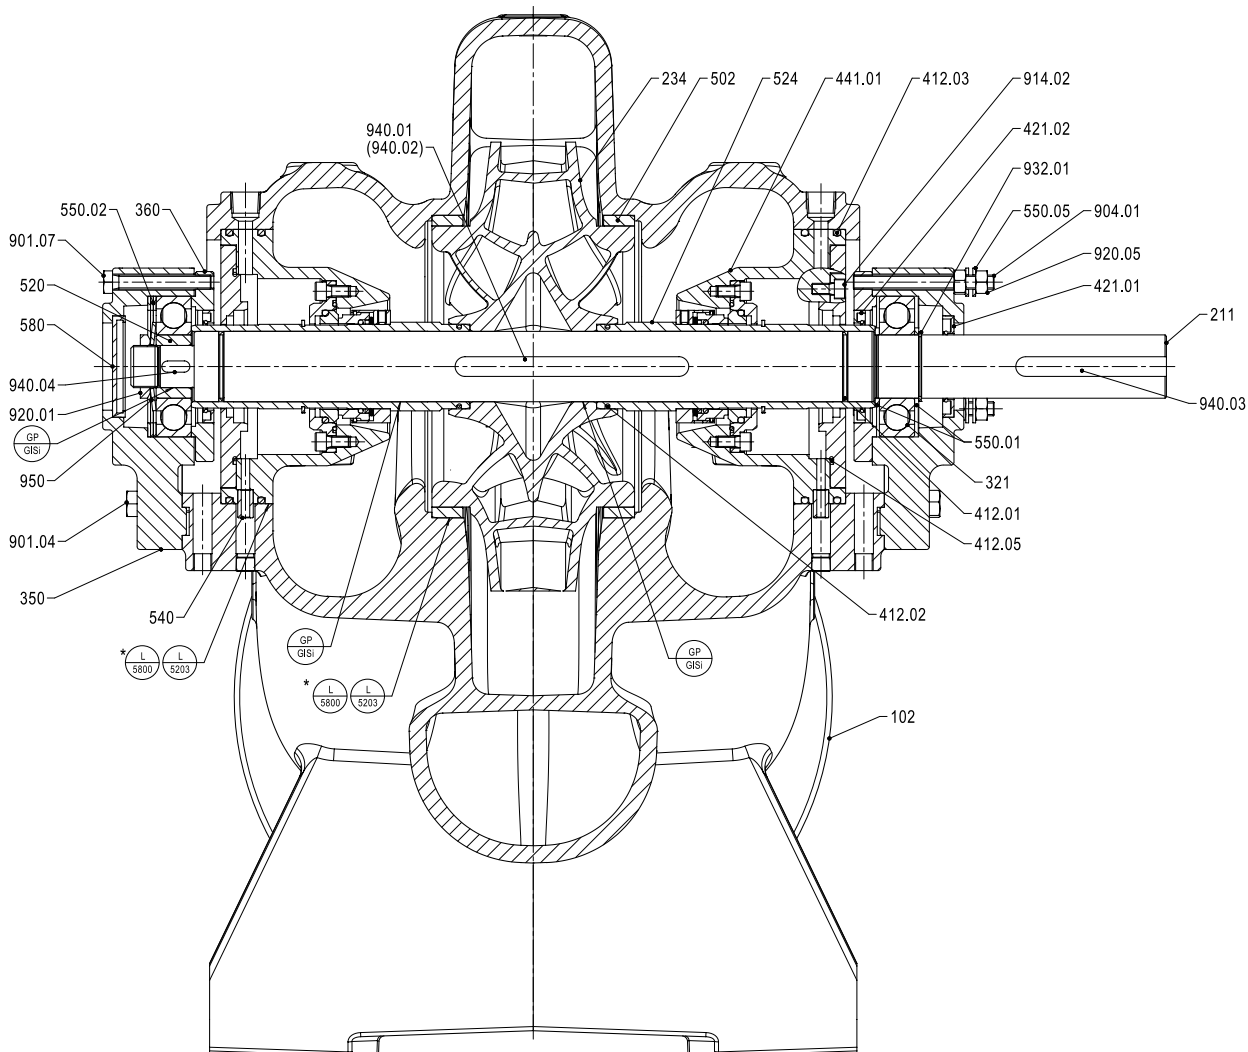


Fig. 7: General assembly drawing of Omega / Omega V (Generation 2), horizontal installation 3E

* For version approved for drinking water

Table 22: List of components

Part No.	Description	Part No.	Description
102	Volute casing	524	Shaft protecting sleeve
211	Pump shaft	540	Bush
234	Impeller	550.01/.02/.05	Disc
321	Radial ball bearing	580	Cap
350	Bearing housing	901.04/.07	Hexagon head bolt
360	Bearing cover	904.01	Fully threaded stud
412.01/.02/.03/.05	O-ring	914.02	Hexagon socket head cap screw
421.01/.02	Lip seal	920.01/.04/.05	Nut

Part No.	Description	Part No.	Description
441.01	Shaft seal housing	932.01	Circlip
502	Casing wear ring	940.01/.02/.03	Key
520	Sleeve	950	Spring

Horizontal installation: Position of hexagon head bolts and screw plugs

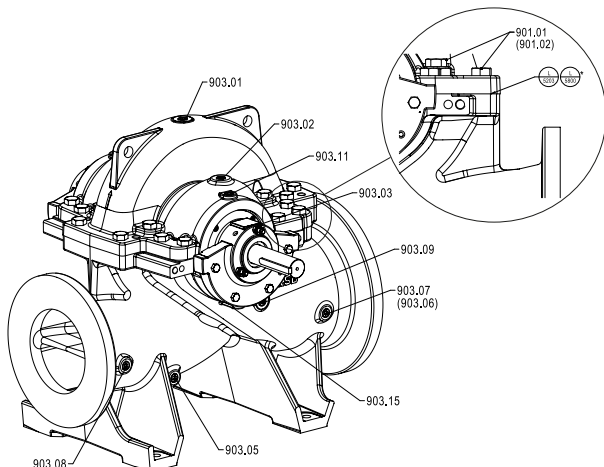


Fig. 8: Horizontal installation: Position of hexagon head bolts and screw plugs

* For version approved for drinking water

Table 23: List of components

Part No.	Description
901.01/.02	Hexagon head bolt
903.01/.02/.03/.05/.06/.07/.08/.09/.11/.15	Screw plug

Standard design: Single mechanical seals 5A/M7N/M74, unbalanced

Mechanical seal M74 only for shaft unit DW90.1

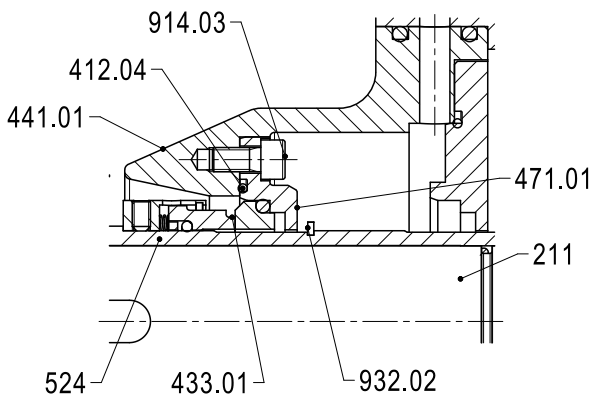


Fig. 9: Single mechanical seals 5A/M7N/M74, standard design, unbalanced

Table 24: List of components

Part No.	Description
211	Pump shaft
412.04	O-ring
433.01	Mechanical seal
441.01	Shaft seal housing
471.01	Seal cover

Part No.	Description
524	Shaft protecting sleeve
914.03	Hexagon socket head cap screw
932.02	Circlip

Standard variant: Double mechanical seals 5A/M7N/M74, tandem arrangement, unbalanced

Mechanical seal M74 only for shaft unit DW90.1

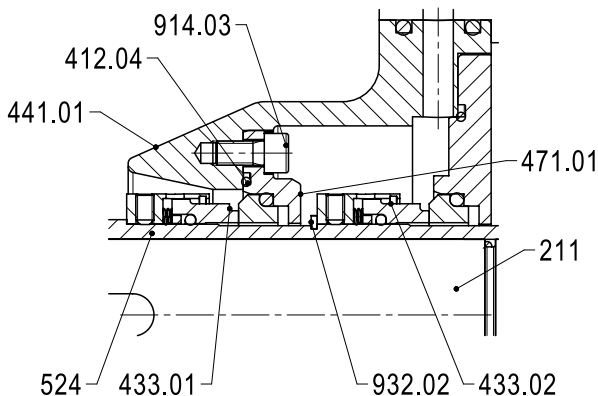


Fig. 10: Double mechanical seals 5A/M7N/M74, tandem arrangement, unbalanced

Table 25: List of components

Part No.	Description
211	Pump shaft
412.04	O-ring
433.01/.02	Mechanical seal
441.01	Shaft seal housing
471.01	Seal cover
524	Shaft protecting sleeve
914.03	Hexagon socket head cap screw
932.02	Circlip

Standard design: Mechanical seal 5BOM, balanced

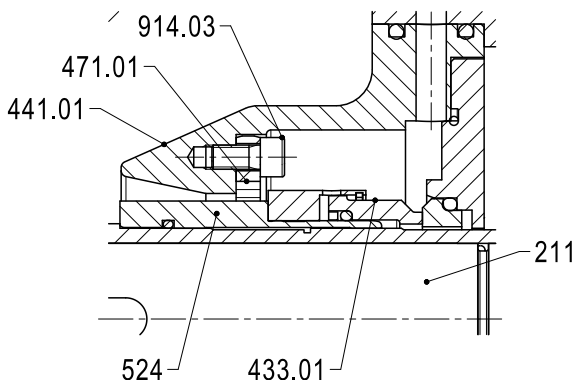


Fig. 11: Standard variant: Mechanical seal 5BOM, balanced

Table 26: List of components

Part No.	Description
211	Pump shaft
433.01	Mechanical seal
441.01	Shaft seal housing

Part No.	Description
471.01	Seal cover
524	Shaft protecting sleeve
914.03	Hexagon socket head cap screw

Standard design: Single mechanical seals 5A/M7N, unbalanced (shaft unit DW40.1)

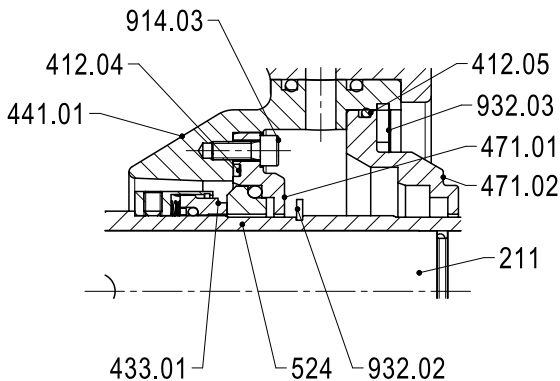


Fig. 12: Single mechanical seals 5A/M7N, standard design, unbalanced (shaft unit DW40.1)

Table 27: List of components

Part No.	Description
211	Pump shaft
412.04/.05	O-ring
433.01	Mechanical seal
441.01	Shaft seal housing
471.01/.02	Seal cover

Part No.	Description
524	Shaft protecting sleeve
914.03	Hexagon socket head cap screw
932.02/.03	Circlip

Standard variant: Double mechanical seals 5A/M7N, tandem arrangement, unbalanced (shaft unit DW40.1)

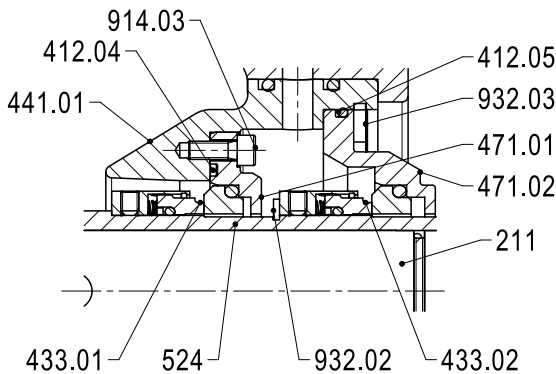


Fig. 13: Double mechanical seals 5A/M7N, tandem arrangement, unbalanced (shaft unit DW40.1)

Table 28: List of components

Part No.	Description
211	Pump shaft
412.04/.05	O-ring
433.01/.02	Mechanical seal
441.01	Shaft seal housing
471.01/.02	Seal cover
524	Shaft protecting sleeve
914.03	Hexagon socket head cap screw
932.02/.03	Circlip

Vertical installation DJ

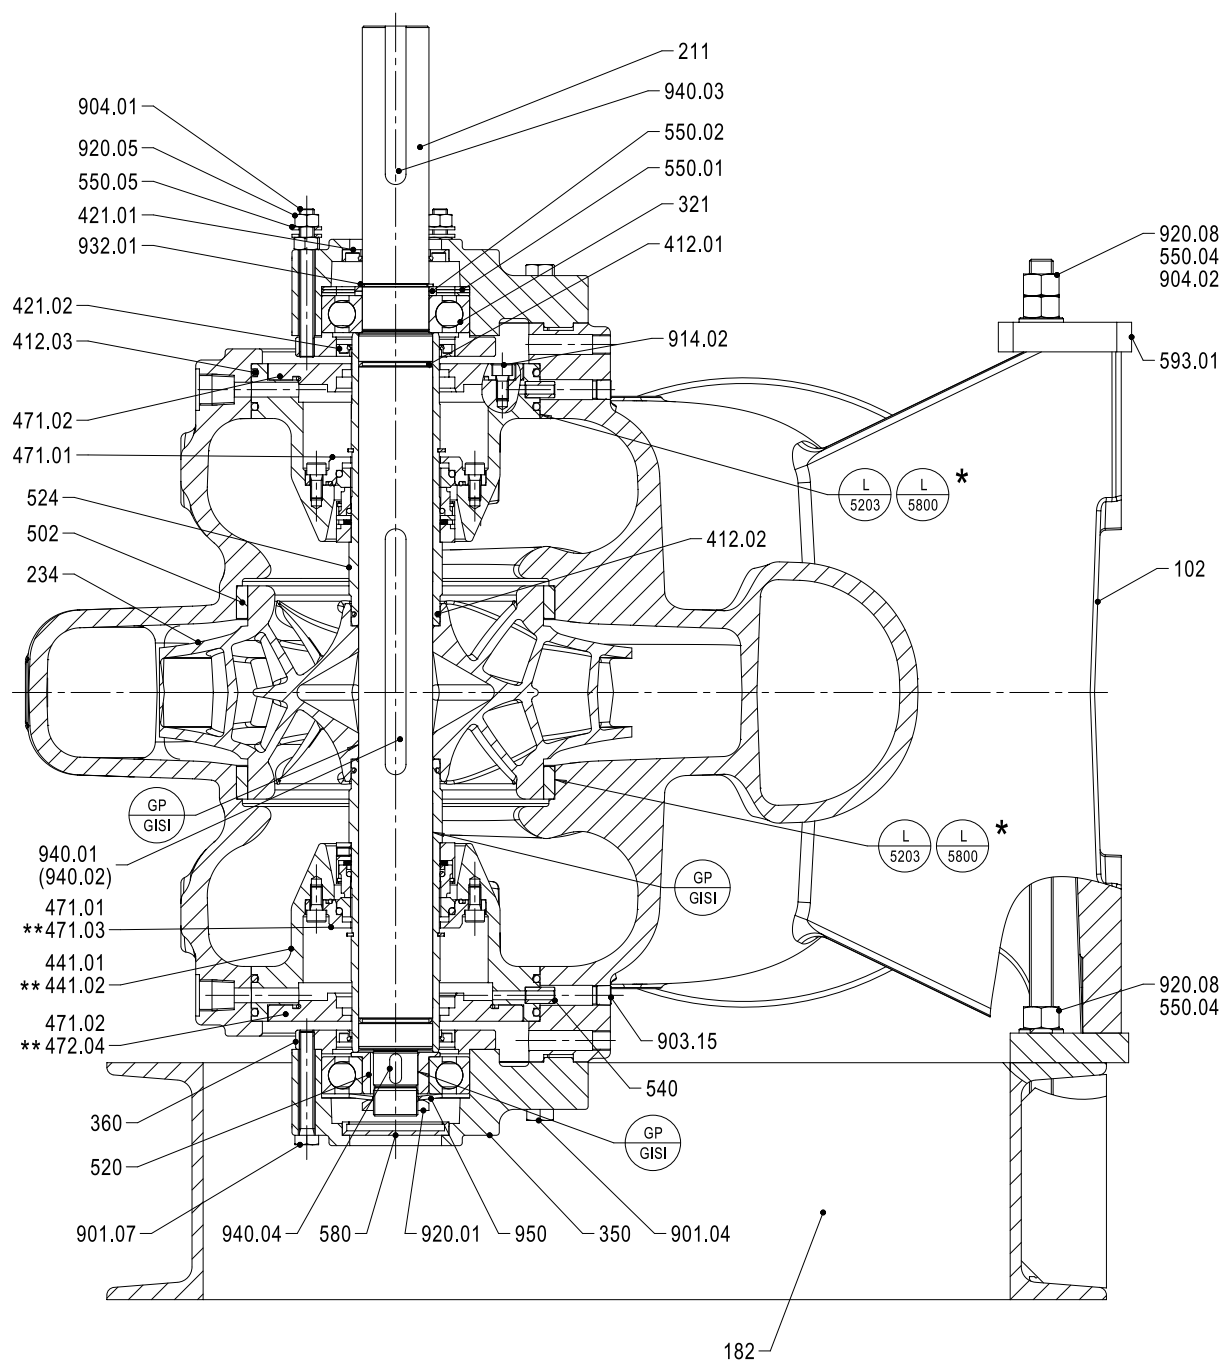


Fig. 14: General assembly drawing of Omega / Omega V (Generation 2), vertical installation DJ

*	For version approved for drinking water
**	For versions with double mechanical seal, tandem arrangement, non-drive end

Table 29: List of components

Part No.	Description	Part No.	Description
102	Volute casing	524	Shaft protecting sleeve
182	Foot	550.01/.02/.04/.05	Disc
211	Pump shaft	540	Bush
234	Impeller	580	Cap
321	Radial ball bearing	593.01	Rail
350	Bearing housing	901.04/.07	Hexagon head bolt
360	Bearing cover	903.15	Screw plug
412.01/.02/.03	O-ring	904.01/.02	Fully threaded stud
421.01/.02	Lip seal	914.02	Hexagon socket head cap screw

Part No.	Description	Part No.	Description
441.01/.02	Shaft seal housing	920.01/.05/.08	Nut
471.01/.02/.03/.04	Seal cover	932.01	Circlip
502	Casing wear ring	940.01/.02/.03/.04	Key
520	Sleeve	950	Spring

Vertical installation DB/DK

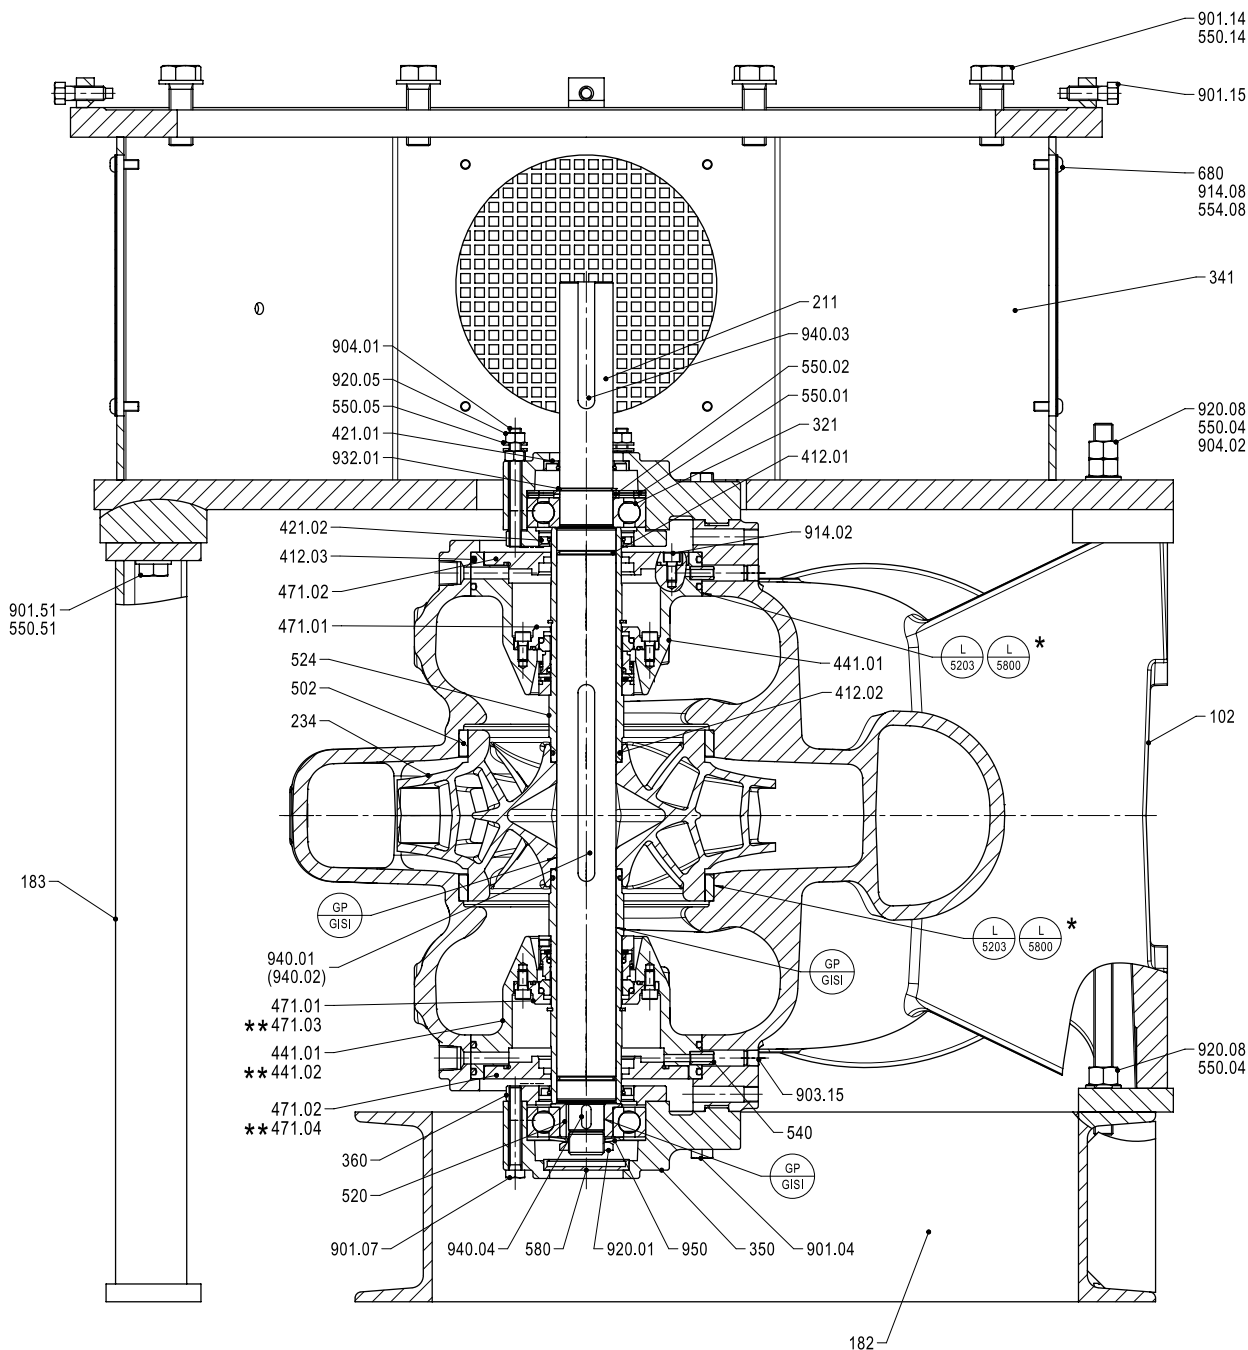


Fig. 15: General assembly drawing of Omega / Omega V (Generation 2), vertical installation DB/DK

*	For version approved for drinking water
**	For versions with double mechanical seal, tandem arrangement, non-drive end

Table 30: List of components

Part No.	Description	Part No.	Description
102	Volute casing	520	Sleeve
182	Foot	524	Shaft protecting sleeve
183	Support foot	550.01/.02/.04/.05/.15/.51	Disc

Part No.	Description	Part No.	Description
211	Pump shaft	554.08	Washer
234	Impeller	580	Cap
321	Radial ball bearing	680	Guard
341	Drive lantern	901.04/.07/.14/.15/.51	Hexagon head bolt
350	Bearing housing	903.15	Screw plug
360	Bearing cover	904.01/.02	Fully threaded stud
412.01/.02/.03	O-ring	914.02/.08	Hexagon socket head cap screw
421.01/.02	Lip seal	920.01/.05/.08	Nut
441.01/.02	Shaft seal housing	932.01	Circlip
471.01/.02/.03/.04	Seal cover	940.01/.02/.03/.04	Key
502	Casing wear ring	950	Spring

Vertical installation DM

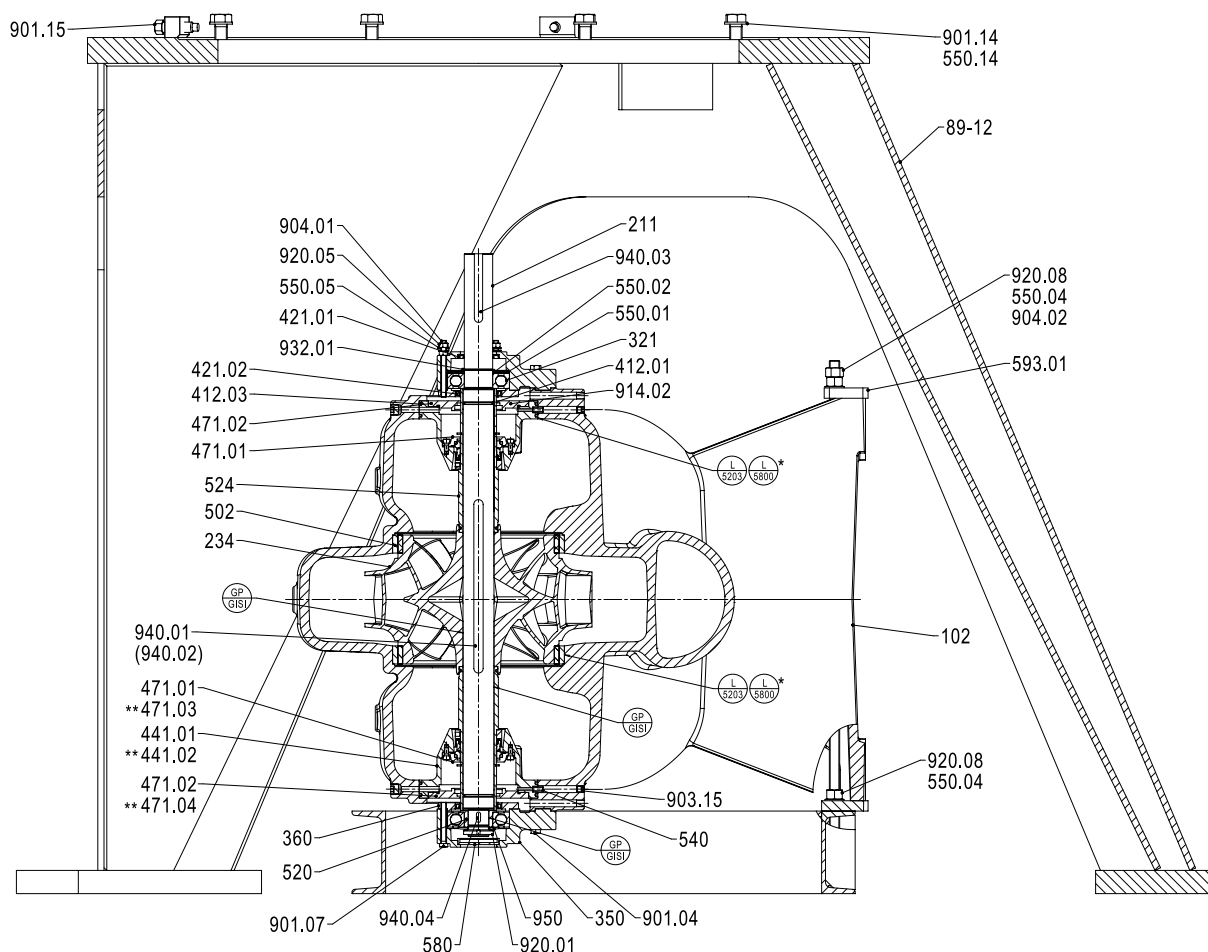


Fig. 16: General assembly drawing of Omega / Omega V (Generation 2), vertical installation DM

*	For version approved for drinking water
**	For versions with double mechanical seal, tandem arrangement, non-drive end

Table 31: List of components

Part No.	Description	Part No.	Description
102	Volute casing	550.01/.02/.04/.05/.14	Disc
211	Pump shaft	540	Bush
234	Impeller	580	Cap
321	Radial ball bearing	593.01	Rail
350	Bearing housing	89-12	Motor bracket
360	Bearing cover	901.04/.07/.14/.15	Hexagon head bolt
412.01/.03	O-ring	903.15	Screw plug
421.01/.02	Lip seal	904.01/.02	Fully threaded stud
441.01/.02	Shaft seal housing	914.02	Hexagon socket head cap screw
471.01/.02/.03/.04	Seal cover	920.01/.05/.08	Nut
502	Casing wear ring	932.01	Circlip
520	Sleeve	940.01/.02/.03/.04	Key
524	Shaft protecting sleeve	950	Spring

Vertical installation: Position of hexagon head bolts and screw plugs

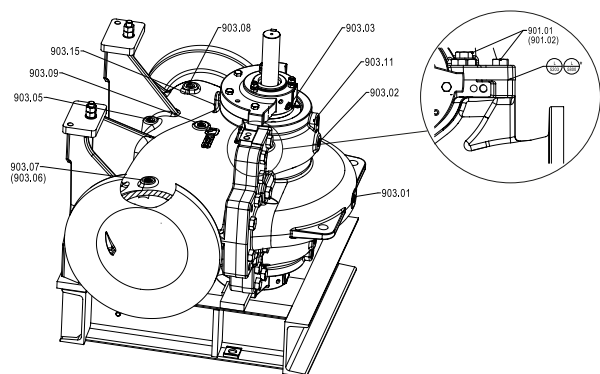


Fig. 17: Vertical installation: Position of hexagon head bolts and screw plugs

* For version approved for drinking water

Table 32: List of components

Part No.	Description
903.01/.02/.03/.05/.06/.07/.08/.09/.11/.15	Screw plug

Standard variant: Single mechanical seals 5A/M7N/M74, unbalanced, drive end

Mechanical seal M74 only for shaft unit DW90.1

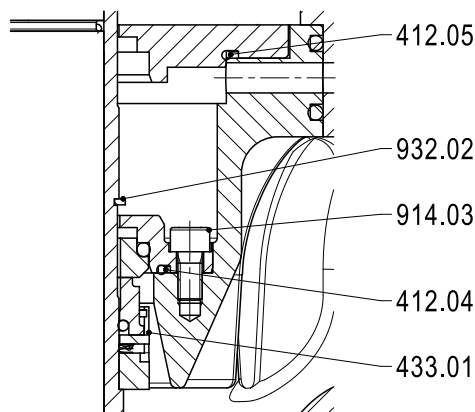


Fig. 18: Single mechanical seals 5A/M7N/M74, unbalanced, drive end

Table 33: List of components

Part No.	Description
412.04/.05	O-ring
433.01	Mechanical seal
914.03	Hexagon socket head cap screw
932.02	Circlip

Standard variant: Double mechanical seals 5A/M7N/M74, tandem arrangement, unbalanced, non-drive end

Mechanical seal M74 only for shaft unit DW90.1

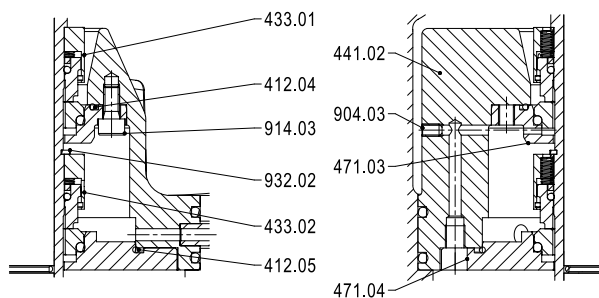


Fig. 19: Double mechanical seals 5A/M7N/M74, tandem arrangement, unbalanced, non-drive end

Table 34: List of components

Part No.	Description
412.04/.05	O-ring
433.01/.02	Mechanical seal
441.02	Shaft seal housing
471.03/.04	Seal cover
904.03	Grub screw
914.03	Hexagon socket head cap screw
932.02	Circlip

Standard variant: Single mechanical seal 5BOM, balanced, drive end

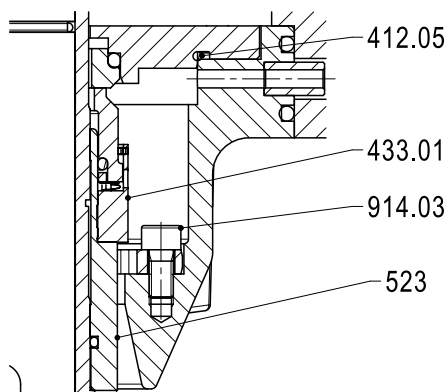


Fig. 20: Single mechanical seal 5BOM, balanced, drive end

Table 35: List of components

Part No.	Description
412.05	O-ring
433.01	Mechanical seal
523	Shaft sleeve
914.03	Hexagon socket head cap screw

Standard variant: Single mechanical seals 5A/M7N, unbalanced, drive end (shaft unit DW40.1)

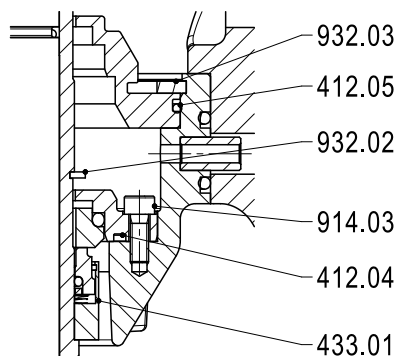


Fig. 21: Single mechanical seals 5A/M7N, unbalanced, drive end (shaft unit DW40.1)

Table 36: List of components

Part No.	Description
412.04/.05	O-ring
433.01	Mechanical seal
914.03	Hexagon socket head cap screw
932.02/.03	Circlip

Standard variant: Double mechanical seals 5A/M7N, tandem arrangement, unbalanced, drive end (shaft unit DW40.1)

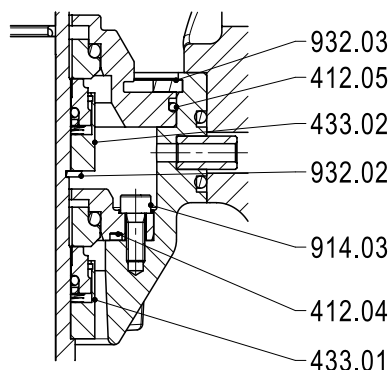


Fig. 22: Double mechanical seals 5A/M7N, tandem arrangement, unbalanced, drive end (shaft unit DW40.1)

Table 37: List of components

Part No.	Description
412.04/.05	O-ring
433.01/.02	Mechanical seal
914.03	Hexagon socket head cap screw
932.02/.03	Circlip

Standard variant: Double mechanical seals 5A/M7N, tandem arrangement, unbalanced, non-drive end (shaft unit DW40.1)

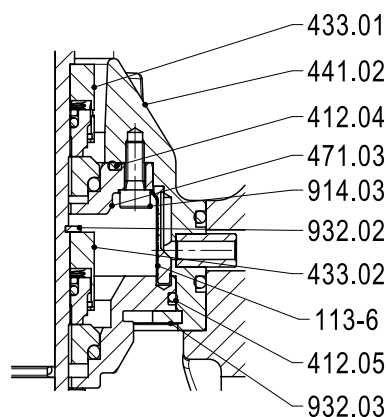


Fig. 23: Double mechanical seals 5A/M7N, tandem arrangement, unbalanced, non-drive end (shaft unit DW40.1)

Table 38: List of components

Part No.	Description
113-6	Intermediate casing
412.04/.05	O-ring
433.01/.02	Mechanical seal
441.02	Shaft seal housing
471.03	Seal cover
914.03	Hexagon socket head cap screw
932.02/.03	Circlip

Standard variant: Single mechanical seal 5BOM, balanced, drive end (shaft unit DW40.1)

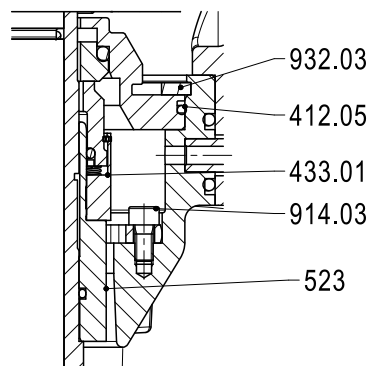


Fig. 24: Single mechanical seal 5BOM, balanced, drive end (shaft unit DW40.1)

Table 39: List of components

Part No.	Description
412.05	O-ring
433.01	Mechanical seal
523	Shaft sleeve
914.03	Hexagon socket head cap screw
932.03	Circlip

Standard design: Position of grooved pins

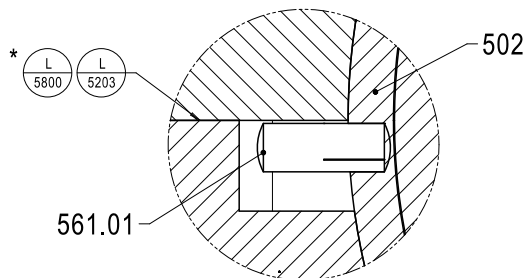


Fig. 25: Position of grooved pins

Table 40: List of components

Part No.	Description
502	Casing wear ring
561.01	Grooved pin

Standard variant: Impeller with impeller wear ring




Fig. 26: Impeller with impeller wear ring

Table 41: List of components

Part No.	Description
502	Casing wear ring
503	Impeller wear ring

