

Masoneilan™ 215X1 Series Control Valve

UOP® Lock Hopper Over
Travel Control Valves



Table of Contents

Features	3	Materials of Construction.....	6
General Data	4	Dimensions	8
Numbering System.....	5	Weights.....	9
Temperature Range/Seat Leakage.....	5	Accessories and Options.....	9
Capacity and Actuation	5	Sales Offices.....	Back Cover

Features

Originally designed in conjunction with UOP, the Masoneilan 215X1 Series is used in severe on-off service within the UOP Lock Hopper control systems as part of their Continuous Catalyst Regeneration Platforming Process. The 215X1 Series design construction is based on the highly successful and reliable 21000 Series unbalanced single ported control valves. Key design features include:

Heavy Top-Guiding

Rugged valve plug support is provided along the entire stroke length using a large guide bushing ensuring excellent plug stability and control. This is critical for controlling vibration damage, repeatable stroking and seating performance, and minimizing trim mechanical wear.

Over Travel Seating

The valve plug subassembly is designed with a primary hard seat and a secondary soft seat. Initial closing contact is made by the hard seating surfaces, followed by additional plug over travel resulting in soft seat closure. Over travel of approximately 0.25 inches (6.4 mm) is achieved with compression of the disk spring sets in the plug subassembly.

Protected Tight Shutoff

Dual seating configuration provides ASME Class VI shutoff leakage with the soft seat and ASME Class IV leakage with the hard seat. As the valve begins to open, the hard seat remains seated while the soft seat retracts into the plug shank. High differential pressure is taken across the metal seat, thus protecting the integrity of the soft seat.

General Data

Flow Direction

Over Travel: Flow-to-Close

Body

Type: High Capacity Globe
Rating: ASME Class 300
End Connections: RFF

Bonnet

Type: Bolted

Body and Bonnet

Materials: Carbon Steel

Severe Service Performance

Typical shutoff pressures up to 400 psig (2800 kPa) can be achieved with the 215X1 Over Travel trim design. Materials of construction are designed to withstand high-pressure drop conditions in hydrogen service with alumina (Al_2O_3) dust particles.

Long Life-Cycle

Excellent wear resistant materials, such as solid Stellite and 17-4 Stainless Steel, are used for the major trim components providing reliable long-term performance with minimum maintenance.

Field Proven Design

The Masoneilan 215X1 Series has a long history of successful operation and performance in numerous UOP Lock Hopper systems installed in refineries around the world.

Ease of Maintenance

Simple top-entry body construction and plug subassembly design allows for easy access and removal of trim components.


Trim

Plug Type: Over Travel
Seat Type: Primary Hard Metal Seat
Secondary Soft Seat
Seat Ring: Threaded
Guide: Heavy Top Guided
Capacity: Full Area
Characteristic: Modified Linear

Actuator

Type: Spring-Diaphragm
Handwheel: Optional

Numbering System

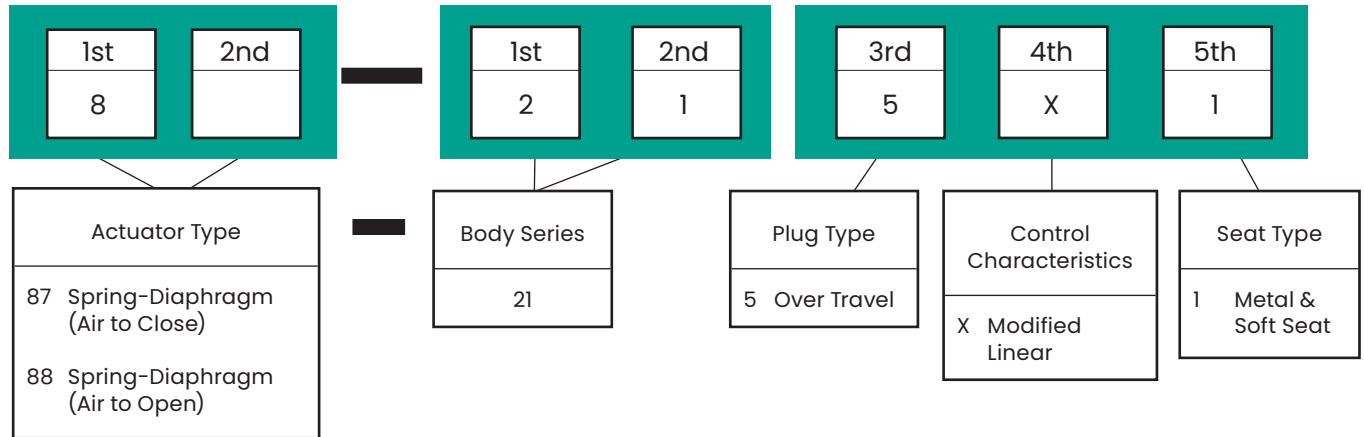

Temperature Range/Seat Leakage

Valve Size		Seat Type	Body Rating	Packing Material	Temperature Range		Seat Leakage Class ¹
inches	DN				Min.	Max.	
1	25	Metal and Soft Seat	ASME Class 300	PTFE	-20°F (-29°C)	450°F (232°C)	VI
1.5	40						
2	50						

Notes:
 1. Seat leakage class ratings per IEC 534-4 and ASME/FCI 70.2.
 2. Primary metal hard seat provides Class IV seat leakage.

Capacity and Actuation

Valve Size		Rated C _v	Travel		Actuator Size	Bench Range	Air Action
inches	DN		inches	mm			
1	25	12	0.8	20.3	No. 10	6 - 30	Direct or Reverse (On-Off)
1.5	40	25	0.8	20.3	No. 10		
2	50	45	0.8	20.3	No. 16		

Materials of Construction

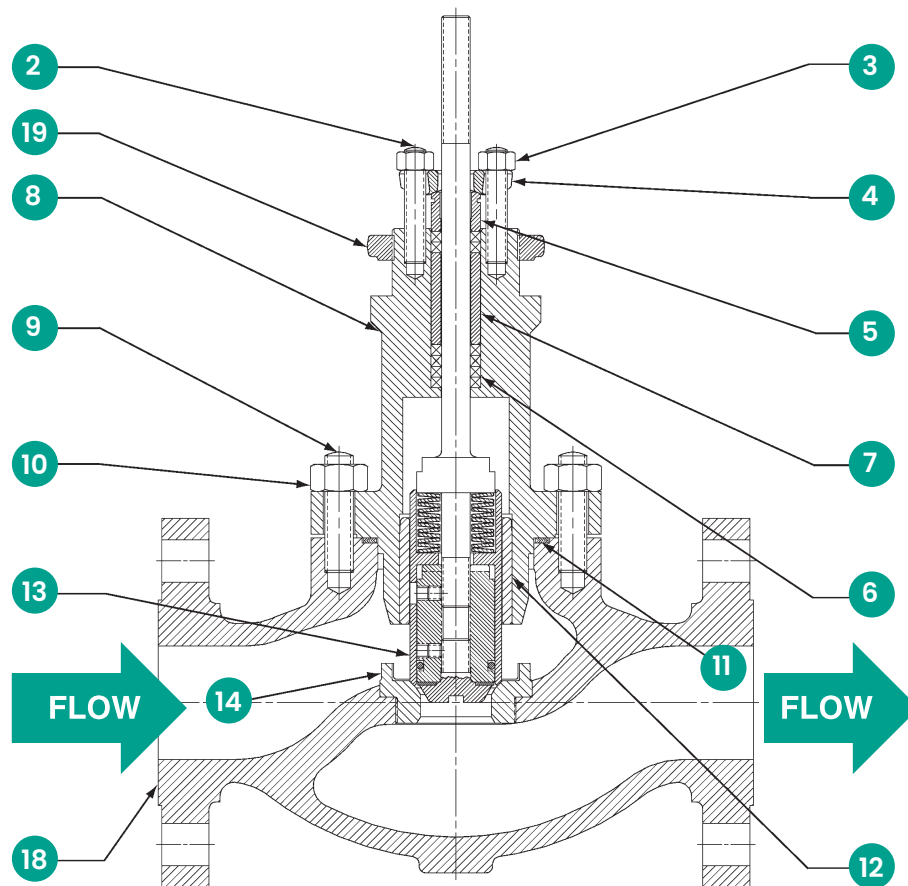


Figure 1 - Body S/A Section

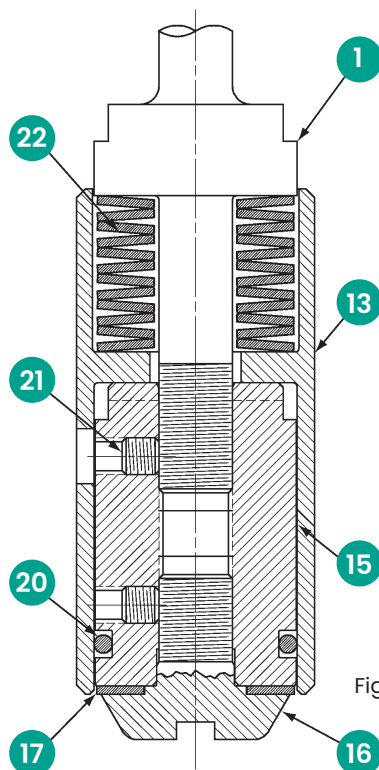


Figure 2 - Trim Details

Materials of Construction


Standard Material Options

Valve Sizes: 1", 1.5" and 2" (DN 25, 40 and 50)

Body Ratings: ASME Class 300

Ref No.	Temperature Range	-20°F	450°F
	Description	Standard Materials	
1	Plug Stem	316 St. St. ASTM A479 TY 316	
2	Packing Flange Stud	304 St. St. ASTM A193 GR B8	
3	Packing Flange Nut	304 St. St. ASTM A194 GR B8	
4	Packing Flange	Carbon Steel ASTM A668 CL B or ASTM A216 GR WCC	
5	Packing Follower	Austenitic 300 Series Stainless Steel	
6	PTFE Packing	PTFE (Teflon®)	
7	Lantern Ring (Optional)	Austenitic 300 Series Stainless Steel	
8	Valve Bonnet	Carbon Steel ASTM A515 Grade 70 (UNSK03101)	
9	Body Stud	Alloy Steel ASTM A193 GR B7	
10	Body Stud Nut	Carbon Steel ASTM A194 GR 2H	
11	Body Gasket	316L St. St. w/Flexible Graphite Filler (Spiral Wound)	
12	Guide Bushing	440C St. St. ASTM A276 TY 440C	
13	Plug Shank	Stellite 6 UNS 30006	
14	Seat Ring	316 St. St. ASTM A479 TY 316 with Hardfaced Seat	
15	Insert Retainer	17-4 PH St. St. ASTM A564 GR 630 (Condition H900)	
16	Plug Tip	17-4 PH St. St. ASTM A564 GR 630 (Condition H900)	
17	Soft Seat Insert	Teflon® ASTM D1457	
18	Valve Body	Carbon Steel ASTM A216 Grade WCC	
19	Drive Nut	Carbon Steel SAE 1117 or ASTM A216 GR WCC	
20	O-Ring	Buna-N ASTM D1418 Class 1 NBR (Nitrile)	
21	Set Screw	Austenitic 300 Series St. St. with NYLOK® Insert	
22	Disc Springs	17-7 PH St. St. ASTM A564 GR 631	
Ref. No.	Temperature Range	-29°C	232°C



Dimensions

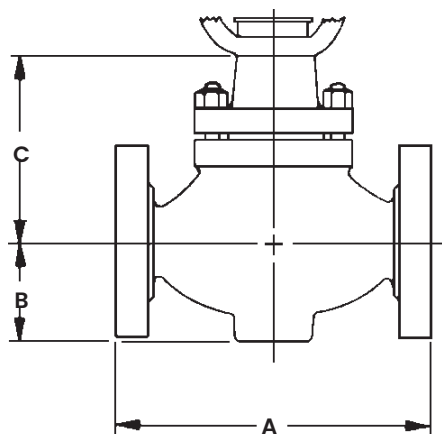

215X1 Series Body S/A Dimensions

ASME Class 300 RFF

Valve Size		A		B		C	
inches	mm	inches	mm	inches	mm	inches	mm
1	25	7.76	197	2.13	54	5.51	140
1.5	40	9.25	235	2.52	64	5.51	140
2	50	10.51	267	3	76	5.51	140

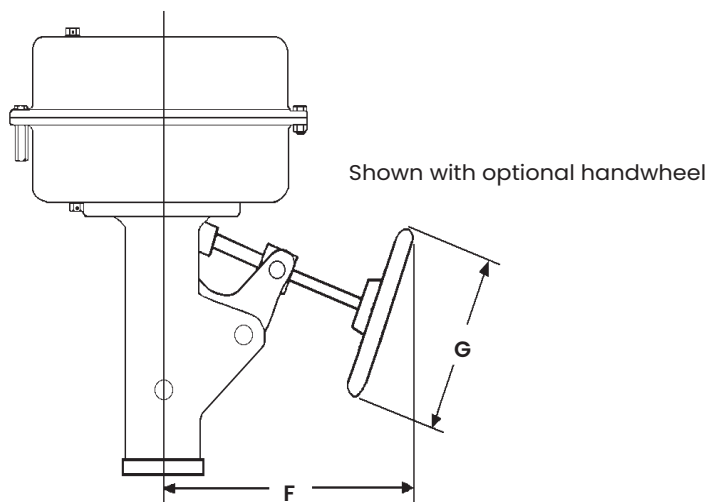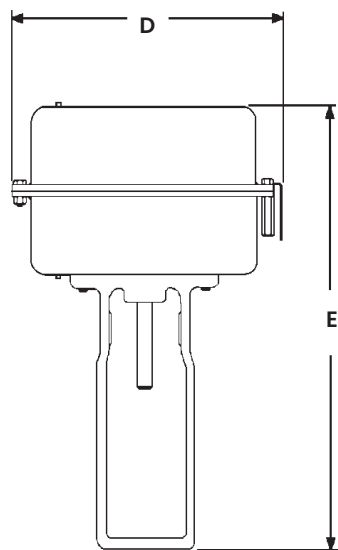

Model 87/88 Actuator Dimensions

Actuator Size	D		E		F		G	
	inches	mm	inches	mm	inches	mm	inches	mm
10	14.50	368	19.58	497	10.90	277	12.00	305
16	18.75	476	28.22	717	14.00	356	18.00	457

Weights

215X1 Series Body S/A ASME Class 300 RFF

Valve Size		Weight	
inches	mm	lbs.	kg
1	25	36	16
1.5	40	49	22
2	50	57	26

Model 87/88 Actuator

Valve Size	Weight		With Handwheel	
	lbs.	kg	lbs.	kg
10	85	39	105	48
16	210	95	245	111

Accessories and Options

Environmental Capabilities (Low Emissions Packing)
Air Sets
Solenoids
Switches

Direct Sales Office Locations

Australia

Brisbane
Phone: +61-7-3001-4319

Perth
Phone: +61-8-6595-7018

Melbourne
Phone: +61-3-8807-6002

Brazil

Phone: +55-19-2104-6900

China

Phone: +86-10-5738-8888

France

Courbevoie
Phone: +33-1-4904-9000

India

Mumbai
Phone: +91-22-8354790

New Delhi

Phone: +91-11-2-6164175

Italy

Phone: +39-081-7892-111

Japan

Tokyo
Phone: +81-03-6871-9008

Korea

Phone: +82-2-2274-0748

Malaysia

Phone: +60-3-2161-03228

Mexico

Phone: +52-55-3640-5060

Russia

Veliky Novgorod
Phone: +7-8162-55-7898

Moscow

Phone: +7-495-585-1276

Saudi Arabia

Phone: +966-3-341-0278

Singapore

Phone: +65-6861-6100

South Africa

Phone: +27-11-452-1550

South & Central America and the Caribbean

Phone: +55-12-2134-1201

Spain

Phone: +34-935-877-605

United Arab Emirates

Phone: +971-4-8991-777

United Kingdom

Phone: +44-7919-382-156

United States

Houston, Texas
Phone: +1-713-966-3600

Find the nearest local Channel Partner in your area:
valves.bakerhughes.com/contact-us

Tech Field Support & Warranty:

Phone: +1-866-827-5378
valvesupport@bakerhughes.com

valves.bakerhughes.com

Copyright 2020 Baker Hughes Company. All rights reserved. Baker Hughes provides this information on an "as is" basis for general information purposes. Baker Hughes does not make any representation as to the accuracy or completeness of the information and makes no warranties of any kind, specific, implied or oral, to the fullest extent permissible by law, including those of merchantability and fitness for a particular purpose or use. Baker Hughes hereby disclaims any and all liability for any direct, indirect, consequential or special damages, claims for lost profits, or third party claims arising from the use of the information, whether a claim is asserted in contract, tort, or otherwise. Baker Hughes reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation. Contact your Baker Hughes representative for the most current information. The Baker Hughes logo and Masoneilan are trademarks of Baker Hughes Company. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.