

Deltaweld® 500/600 Systems

MIG Welding
System



QUICK SPECS

Heavy Industrial Applications

General manufacturing
General fabrication
Structural steel fabrication
Transportation
Sheet metal fabrication
Light-gauge tube and sheet

Processes

MIG (GMAW)
Flux-cored (FCAW)
Accu-Pulse® (GMAW-P)*
Versa-Pulse™ (GMAW-P)**
High-deposition MIG (GMAW)**
RMD® (Regulated Metal Disposition)**
Air carbon arc (CAC-A) — Rated: 5/16-inch carbons

*With Intellix™ Pro and Intellix™ Elite feeders.

**With Intellix™ Elite feeders.

Auxiliary Power 115 V standard

Input Power

208/230/460 V or 575 V, 3-phase, 60 Hz

Rated Output

500: 500 A at 100% duty cycle

600: 600 A at 100% duty cycle

Output Range

500: 30–650 A, 10–44 V

600: 30–750 A, 10–44 V

The standard in manufacturing for welders of all skill levels,
with Intellix™ wire feeder options that deliver application-specific benefits.

Three Intellix™ wire feeder options

- **Basic** with arc control feature means welders can produce better welds with minimal parameter adjustments.
- **Pro** adds EZ-Set, Accu-Pulse®, memory buttons and weld programs.
- **Elite** adds additional weld programs, intuitive display with on-demand graphics and more control.

See pages 3 and 5 for additional Intellix wire feeder features.

Easy to use

EZ-Set simplifies parameter setup based on material thickness, removing complexity.



Pulse capable


Accu-Pulse offers a more forgiving arc and compensates for variations in operator technique, providing a wider operating window.

Ready to weld

Reduce the time and hassle of setting up welding systems. Make your move to a weld-ready Deltaweld MIGRunner™.

Insight

Optional Welding Intelligence™ weld monitoring system. Get more done, produce higher-quality welds and control costs. See page 6 for more information.



Power source is warranted for three years, parts and labor.
Original main power rectifier parts are warranted for five years.
Gun warranted for 90 days, parts and labor.



Miller Electric Mfg. LLC

An ITW Welding Company
1635 West Spencer Street
P.O. Box 1079
Appleton, WI 54912-1079 USA

Equipment Sales US and Canada

Phone: 866-931-9730
International Phone: 920-735-4554

MillerWelds.com



Deltaweld® 500/600 Features

Dedicated constant-current gouge mode, rated for up to 3/8-inch carbons.

Wind Tunnel Technology™. Internal air flow that protects electrical components and PC boards from dirt, dust, debris — greatly improving reliability.

Fan-On-Demand™ operates only when needed reducing noise, power consumption, and the amount of airborne contaminants pulled through the machine.



Deltaweld 500 with meters and Insight



Standard 115-volt auxiliary power provides 15 amps of circuit-breaker-protected power.



ArcConnect™ is a next generation communication that utilizes high speed signals to improve weld performance and allow point-of-use controls to be located at the feeder.

Backwards compatibility. Models are available with both ArcConnect and the standard Miller® 14-pin for use with older Miller® wire feeders.



Deltaweld 500 with meters, 14-pin receptacle and Insight



Industrial cart is more robust with stowaway dual cylinder rack and lockable front casters with oversized rear wheels. Included in MIGRunner packages or sold separately.



Optional industrial water cooler plugs directly into the 115-volt receptacle on the back of the Deltaweld power source and slides into bottom of industrial cart. Has 2.5-gallon coolant capacity with easy front fill, external filter, and power and flow indicators.

Intellx™ Feeders Features



Balanced-pressure drive-roll design and tensioners feed wire in its truest and straightest form for consistent feedability, resulting in better welding performance.

Accu-Mate™ connection aligns the gun perfectly in the drive-roll carrier — preventing the gun from being pulled loose and providing consistent wire feeding.

Drive rolls and guides are common with other Miller® industrial feeders (use existing, not new parts).

Inlet guide and intermediate guide installation is toolless.

Rotatable drive assembly allows operator to rotate the drive, eliminating severe bends in the wire feed path. This extends gun-liner life and aids in feeding difficult wires.



Single-wire feeder swivel kit for convenience and function, reducing wear on gun and liner assembly. It includes integrated handle, MIG gun and cable holders, and moves with the MIG gun, allowing operator to see the front of the feeder and which parameters are selected.



Intellx Pro single-wire feeder

- Memory buttons** for quick program recall
- Display and controls** for volts/arc length, wire feed speed, and EZ-Set (if selected)
- Arc control** to fine tune the welding arc
- LCD setup screen** for easy selection of welding processes
- Jog and purge button**
- Trigger hold, trigger select, preflow and postflow buttons**



Intellx Elite single-wire feeder

- Soft keys** to easily navigate menus
- Full-color LCD screen** to simplify the setup and operation of a fully featured feeder
- Arc control** to fine tune welding arc
- Memory buttons** for quick program recall
- Trigger connections** for standard MIG gun and XR-Aluma-Pro™ Plus and XR™-Pistol Plus push-pull guns



Dual-wire models allow two different wire types to be available on one feeder, avoiding downtime from changing spools and drive rolls.


Deltaweld® 500/600 Processes and Performance Data

BEST FOR	STANDARD SPRAY	HD MIG**	ACCU-PULSE*	VERSA-PULSE**	SHORT CIRCUIT	RMD**
Deposition	A	A	A	B	D	D
Gap filling	D	D	B	B	A	A
Low heat input	D	C	B	A	A	A
Out-of-position welds			A	B	B	B
Low spatter	A	A	A	B	C	B
Thick metals	A	A	A	C	D	D
Thin metals			B	A	A	A
Increased travel speed	A	A	A	A	B	C

HOT  **COLD**

Ratings A, B, C, and D are relative values. An "A" rating indicates a best fit between your performance needs and process. A "blank" rating indicates that the process is not recommended for that application.

*With Intellix™ Pro and Intellix™ Elite feeders. **With Intellix™ Elite feeders.

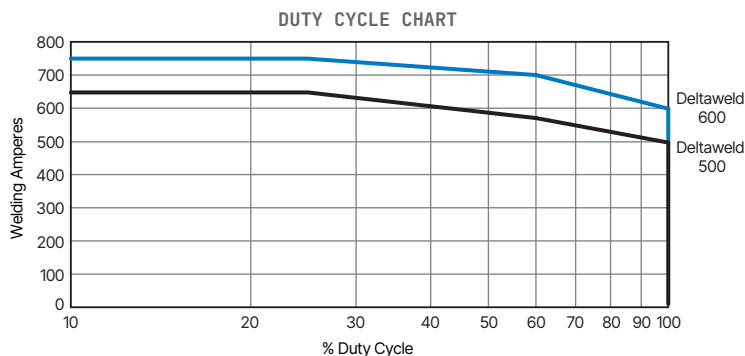

MIG

- Lower spatter than traditional MIG welders
- Better arc performance with silicon bronze and coated materials

Accu-Pulse®*

- The most popular process for majority of industrial welding applications
- Most adaptive arc on 16 gauge (1.6 mm) and thicker
- Designed for all weld positions

Versa-Pulse™ **

- Fast, low-heat, low-spatter process — for materials 1/4 inch (6.35 mm) and thinner
- Great for gap filling
- Shortest arc length/lowest pulse voltage for lower heat and lower spatter at higher speeds

High-deposition MIG (HD MIG)**

- Higher deposition rates than standard spray transfer on thicker materials
- Designed for welding applications in which spray transfer is preferred

RMD® **

- Lowest heat process, best for gap handling
- Limited travel speed

Deltaweld® 500/600 Specifications (Subject to change without notice.)



MODEL	MODE	AMP/VOLT RANGES	RATED OUTPUT	AMPS INPUT AT RATED LOAD OUTPUT, 60 HZ 208 V* 230 V* 460 V 575 V KVA KW								DIMENSIONS	NET WEIGHT
Deltaweld 500	MIG (GMAW)	30–650 A 10–44 V	500 A at 39 VDC, 100% duty cycle	64.2	58.1	30.4	24.8	24.2 (24.7**)	21.7 (21.7**)	H: 22.36 in. (568 mm) <i>(includes lift eye)</i> W: 15.35 in. (390 mm) D: 31.65 in. (804 mm)	145 lb. (65.8 kg)		
			575 A at 42.75 VDC, 60% duty cycle	80.2	73.5	38.0	30.4	30.3 (30.2**)	27.2 (27.2**)				
			650 A at 44 VDC, 25% duty cycle	94.2	84.9	43.9	34.9	35.0 (34.8**)	31.6 (31.7**)				
	Gouge (CAC-A)	30–650 A 10–44 V	500 A at 40 VDC, 100% duty cycle	65.4	59.6	31.1	25.3	24.8 (25.2**)	22.2 (22.3**)				
			575 A at 43 VDC, 60% duty cycle	81.0	73.5	38.0	30.3	30.2 (30.1**)	27.3 (27.4**)				
			650 A at 44 VDC, 25% duty cycle	94.2	84.9	43.9	34.9	35.0 (34.8**)	31.6 (31.7**)				
Deltaweld 600	MIG (GMAW)	30–750 A 10–44 V	600 A at 44 VDC, 100% duty cycle	64.2	58.1	40.6	32.3	29.1 (29.2**)	32.3 (32.2**)	H: 22.36 in. (568 mm) <i>(includes lift eye)</i> W: 15.35 in. (390 mm) D: 31.65 in. (804 mm)	145 lb. (65.8 kg)		
			700 A at 44 VDC, 60% duty cycle	80.2	73.5	47.7	37.6	34.2 (34.1**)	38.1 (37.4**)				
			750 A at 44 VDC, 40% duty cycle	94.2	84.9	51.1	40.5	36.7 (40.5**)	40.8 (40.4**)				
	Gouge (CAC-A)	30–750 A 10–44 V	600 A at 44 VDC, 100% duty cycle	65.4	59.6	40.9	32.2	29.2 (29.2**)	32.6 (32.1**)				
			700 A at 44 VDC, 60% duty cycle	81.0	73.5	47.3	37.8	34.2 (34.3**)	37.8 (37.7**)				
			750 A at 44 VDC, 40% duty cycle	94.2	84.9	51.1	40.5	36.7 (40.5**)	40.8 (40.4**)				

*On 208 and 230 V input power, Deltaweld 600 operates at the same output ratings as Deltaweld 500. **KVA and KW for 575-volt model.



Certified by Canadian Standards Association to both the Canadian and U.S. Standards.

Intellx™ Feeders Comparison



Processes

- MIG
- EZ-Set MIG (Intellx Pro and Intellx Elite)
- EZ-Set Accu-Pulse® (Intellx Pro and Intellx Elite)
- EZ-Set Versa-Pulse™ (Intellx Elite)
- EZ-Set High-deposition MIG (Intellx Elite)
- EZ-Set RMD® (Intellx Elite)



Intellx Pro and Intellx Elite Feeder Programs

- Different wire sizes
- Different gas types
- Flux-cored
- Metal-cored
- Steel
- Stainless steel
- Aluminum

Additional Intellx Elite Feeder Programs

- Nickel
- Copper nickel
- Silicon bronze
- Titanium

FEATURE	INTELLX BASIC FEEDER	INTELLX PRO FEEDER	INTELLX ELITE FEEDER
Digital meters	■	■	Full color LCD
Remote voltage	■	■	■
Wire feed speed	■	■	■
Arc control	■	■	■
Trigger hold	■	■	■
Wire jog and purge	■	■	■
Wire feed speed feedback	■	■	■
Four drive rolls	■	■	■
Dual-wire models	■	■	■
Rotatable drive	■	■	■
Up to 60 lb. spool	■	■	■
MIG process	■	■	■
Insight Centerpoint™ Basic compatible*	■	■	■
EZ-Set MIG and Accu-Pulse®		■	■
Trigger select		■	■
Preflow and postflow		■	■
Memory slots		2	8
Out-of-box programs (steel/stainless/aluminum)		■	■
Out-of-box programs (nickel/copper nickel/silicon bronze/titanium)			■
EZ-Set Versa-Pulse™, high-deposition MIG and RMD®			■
XR™ Plus push-pull gun compatible			■
Profile Pulse™			■
Weld sequence control			■
Trigger dual schedule			■
Dual schedule switch support			■
Parameter limits			■
Memory lockouts			■
System lock			■
Wire retract			■
Auto thread and auto purge			■
Cloning and custom weld library			■
Remote gouge			■
Insight Centerpoint™ Premium compatible*			■

*Insight module required.

Intellx™ Feeder Specifications (Subject to change without notice.)



INPUT POWER	WELDING POWER SOURCE	INPUT WELDING CIRCUIT RATING	WIRE FEED SPEED	WIRE DIAMETER CAPACITY	MAXIMUM SPOOL SIZE CAPACITY	DIMENSIONS (H x W x D)	NET WEIGHT
50 VDC	Deltaweld 350, 500 or 600	600 A at 113 VDC, 60% duty cycle	50–780 ipm (1.3–19.8 m/min.)	.023–5/64 in. (0.6–2.0 mm) Elite model only: Aluminum: .035–1/16 in. (0.9–1.6 mm)	18 in. (457 mm) 60 lb. (27 kg)	Single-wire: 16.25 x 12.38 x 27.88 in. (413 x 314 x 708 mm) Dual-wire: 14 x 18 x 34.5 in. (356 x 457 x 876 mm)	Single-wire: 44.8 lb. (20.3 kg) Dual-wire: 77 lb. (34.9 kg)

Certified by Canadian Standards Association to both the Canadian and U.S. Standards.




Insight Welding Intelligence™

With an Insight weld monitoring system you can get more done, produce higher-quality welds and control costs.

Insight Centerpoint™ (Purchased license(s) of Centerpoint required.)

On-premises application providing productivity/utilization metrics, capture of welding parameters, operator weld sequence governance, and integration with enterprise IIoT solutions. Scalable to end user needs.

- **Measure welding productivity.** See each welder's arc-on time to set baselines and plan improvements. Capture activities to understand downtime reasons.
- **Govern operator tasks.** Through an easy-to-use operator interface direct welding and non-welding tasks to follow standard work practices, reduce out of sequence welds, and prevent missing welds.
- **Reduce training costs.** Utilize Centerpoint as the "Digital Mentor" to train new welders on proper production steps freeing up senior personnel for more productive activities.
- **Configure weld process remotely.** Full fleet management allows configuration of Deltaweld settings from Centerpoint.

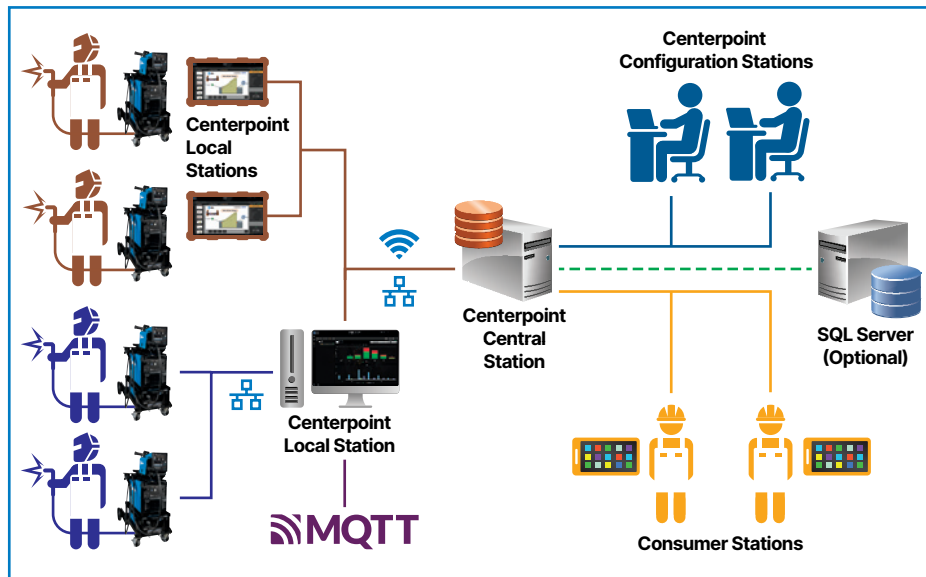

Learn more at MillerWelds.com/insight

Requirements

Deltaweld® 500 requires Insight factory option (page 12) or Insight field install kit (289303).

Deltaweld 600 includes required Insight board option.

Modes of operation

- **Basic mode** included at no cost
- **Premium mode** requires a purchased capability key for each Deltaweld


301485 Centerpoint v10 Single License

301490 Centerpoint Premium Capability Activation



▲ Premium mode

▼ Basic mode

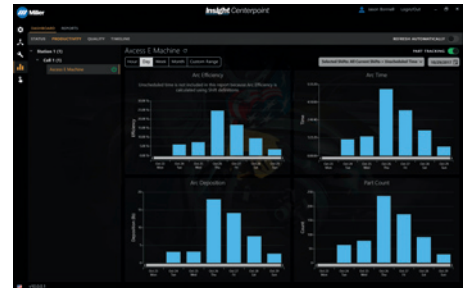

Deltaweld® 500 MIGRunner™ Packages

Deltaweld 500 MIGRunner with Intellex™ Basic Feeder

951000147 With single-wire Intellex Basic

951000148 With dual-wire Intellex Basic

Includes

- Deltaweld power source (907785) with factory-installed industrial cart with stowaway dual cylinder rack
- Intellex Basic single- **OR** dual-wire feeder
- 15 ft. (4.6 m) Bernard® BTB Gun 400 A (two with dual-wire feeder) with AccuLock™ consumables
- Factory-installed swivel kit with integrated handle, cable and gun holders, and chains for gas cylinders
- Cart accessory kit for single- or dual-wire feeders consisting of flowmeter regulator with 5 ft. (1.5 m) gas hose (two with dual-wire feeder), 10 ft. (3 m) 4/0 feeder weld cable with lugs, 15 ft. (4.6 m) work cable with 600-amp C-clamp, and 9 ft. (2.7 m) ArcConnect control/motor cable
- .035/.045 in. V-groove drive rolls
- Quick-setup guide



Deltaweld 500 MIGRunner with Intellex™ Pro Feeder

208/230/460 V

575 V

951000149 With single-wire Intellex Pro

951000155 With single-wire Intellex Pro

951000151 With dual-wire Intellex Pro

Includes

- Deltaweld power source (208/230/460 V: 907785) **OR** (575 V: 907786) with factory-installed industrial cart with stowaway dual cylinder rack
- Intellex Pro single- **OR** dual-wire feeder
- 15 ft. (4.6 m) Bernard® BTB Gun 400 A (two with dual-wire feeder) with AccuLock™ consumables
- Factory-installed swivel kit with integrated handle, cable and gun holders, and chains for gas cylinders
- Cart accessory kit for single- or dual-wire feeders consisting of flowmeter regulator with 5 ft. (1.5 m) gas hose (two with dual-wire feeder), 10 ft. (3 m) 4/0 feeder weld cable with lugs, 15 ft. (4.6 m) work cable with 600-amp C-clamp, and 9 ft. (2.7 m) ArcConnect control/motor cable
- .035/.045 in. V-groove drive rolls
- Quick-setup guide



Deltaweld 500 MIGRunner with Intellex™ Elite Feeder

208/230/460 V

951000280 With single-wire Intellex Elite

951000281* With Insight and single-wire Intellex Elite

951000277 With dual-wire Intellex Elite

Includes

- Deltaweld power source (208/230/460 V: 907785, or 907785002 on Insight package) with factory-installed industrial cart with stowaway dual cylinder rack
- Intellex Elite single- **OR** dual-wire feeder
- 15 ft. (4.6 m) Bernard® BTB Gun 400 A (two with dual-wire feeder) with AccuLock™ consumables
- Factory-installed swivel kit with integrated handle, cable and gun holders, and chains for gas cylinders
- Cart accessory kit for single- or dual-wire feeders consisting of flowmeter regulator with 5 ft. (1.5 m) gas hose (two with dual-wire feeder), 10 ft. (3 m) 4/0 feeder weld cable with lugs, 15 ft. (4.6 m) work cable with 600-amp C-clamp, and 9 ft. (2.7 m) ArcConnect control/motor cable
- .035/.045 in. V-groove drive rolls
- Quick-setup guide

**Includes Insight Centerpoint™ Basic mode. Insight Centerpoint Basic mode requires Centerpoint license(s). Optional Insight Centerpoint Premium (301490) can be added for use with Intellex Elite feeder/ROI.*



Genuine Miller® Accessories

Industrial Cart and Feeder Swivel Kit

Feeder Swivel Kit (301838) is required to add handle, MIG gun holder, cable management, and gas cylinder support.



Industrial Cart 301758
Robust cart features small footprint, stowaway dual-cylinder rack and lockable front casters with oversized rear wheels. Industrial cooler (sold separately) integrates into bottom portion of cart.



Feeder Swivel Kit 301838
For single- and dual-wire feeders. Allows feeder to mount to the top of Deltaweld. Includes integrated handle, MIG gun and cable holders.
Note: ONLY the single-wire feeder can swivel.



Stationary Handle Kit 301529
Allows easy movement and portability of the power source.
Note: Stationary handle kit is not compatible with feeder swivel kit above.



Hanging Bail 058435
Used for suspending feeder over work area.



Cart Accessory Kit 301528
Single-wire feeder kit for use with industrial cart 301758. See note below for dual-wire feeder kit. Consists of flowmeter regulator with 5-foot (1.5 m) gas hose, 10-foot (3 m) 4/0 feeder weld cable with lugs, 15-foot (4.6 m) work cable with 600-amp C-clamp, and 9-foot (2.7 m) ArcConnect control/motor cable. Dual kit comes with an additional flowmeter regulator and gas hose.

Note: For dual-wire feeder kit both 301528 and 301579 are required.



Spool Covers 295231
For single-wire feeders and left side of dual-wire feeders
090389
For right side of dual-wire feeders

For 12-inch (305 mm) spool.


Note: Spool covers cannot be installed if the wire drive assembly is in a rotated position.



Spool Adapter 047141
For use with 14-pound (6.4 kg) spool of Lincoln self-shielding wire.



Wire Reel Assembly 108008
For 60-pound (27 kg) coil of wire.



Reel Covers 195412 For single-wire feeders and left side of dual-wire feeders
091668 For right side of dual-wire feeders
For 60-pound (27 kg) coil. Helps to protect the welding wire from dust and other contaminants.

Note: Reel covers cannot be installed if the wire drive assembly is in a rotated position.



ArcConnect Control/Motor Cables

280471009 9 ft. (2.7 m)
280471015 15 ft. (4.6 m)
280471025 25 ft. (7.6 m)
280471050 50 ft. (15.2 m)
280471075 75 ft. (22.9 m)
280471100 100 ft. (30.5 m)
280471150 150 ft. (45.7 m)

Connects power source directly to feeder or remote operator interface.

Note: Cables cannot be joined together to create longer lengths and extension cables are not available.



Work Sense Leads (volt sense)

300461 25 ft. (7.6 m)
300462 50 ft. (15.2 m)

When connected from the back of the wire feeder to the workpiece, the work sense lead provides accurate voltage feedback on the wire feeder display, and compensates for any voltage drop from the weld cables.



AccuLock™ Nozzle N-A3412C

ONLY for use with Intellix™ Elite feeders. Required for high-deposition MIG (HD MIG) process when using Bernard® BTB gun with AccuLock consumables.

Coolant Systems



Industrial Water Cooler (115 V) 301759
2.5-gallon cooler for use with water-cooled torches rated up to 600 amps. Plugs directly into the 115-volt receptacle on the back of the Deltaweld power source and slides into bottom of new cart. Features easy front fill, external filter, and power and flow indicators.

Coolant Fitting 081543
5/8-18 UNF-2B LH THRD (sold separately).

Coolant 043809
Sold in cases of four one-gallon recyclable plastic bottles. Miller coolants contain a base of ethylene glycol and deionized water to protect against freezing to -37 degrees Fahrenheit (-38°C) or boiling to 227 degrees Fahrenheit (108°C). Also contains a compound that resists algae growth.

XR™ Plus Push-Pull Guns (ONLY for use with Intellx™ Elite feeder/ROI/Swingarc™.)



XR-Aluma-Pro™ Plus Guns

Air-Cooled

301575 15 ft. (4.6 m)
301574 25 ft. (7.6 m)
301739 35 ft. (10.7 m)

Water-Cooled

301576 15 ft. (4.6 m)
301577 25 ft. (7.6 m)
301740 35 ft. (10.7 m)

XR™-Pistol Plus Guns

Air-Cooled

300753 15 ft. (4.6 m)
300754 25 ft. (7.6 m)

Water-Cooled

300757 25 ft. (7.6 m)

Available in air- or water-cooled versions in multiple lengths for extended reach with trouble-free, reliable feeding.

Aluminum-series-specific tension setting ensures smooth wire feeding performance with 4000 or 5000 series aluminum wires.

Replaceable feed cable liner is designed to provide consistent arc performance. It also reduces parts cost and service time by allowing a simple means of removing and replacing liner and not the complete feed cable.

Isolated common knurled drive roll helps reduce wear, reducing down time and cost.

Easy-to-rotate self-seating head tube allows for better access into tight spots, providing excellent current transfer.

Serviceability. These guns feature a full-length hook-and-loop sealed leather jacket with integrated strain reliefs for easy cable maintenance and protection. Additionally, the Aluma-Pro Plus guns feature quick connections between the control cable and electrical components (trigger, motor, potentiometer).

Specifications (Subject to change without notice.)

MODEL	WELDING CURRENT RATING	WIRE FEED SPEED	WIRE TYPE AND DIAMETER CAPACITY	DIMENSIONS	NET WEIGHT (GUN ONLY)
XR-Aluma-Pro Plus (Air-cooled)	300 A at 100% duty cycle	70–900 ipm (1.8–23 m/min.) dependent on feeder used	.030–1/16 in. (0.8–1.6 mm) aluminum wire	H: 5 in. (127 mm) W: 2.5 in. (64 mm) D: 17 in. (432 mm)	2.5 lb. (1.1 kg)
XR-Aluma-Pro Plus (Water-cooled)	400 A at 100% duty cycle	70–900 ipm (1.8–23 m/min.)	Requires gun wire kit 230708 to run 1/16 in. (1.6 mm) wire		2.9 lb. (1.3 kg)
XR-Pistol Plus (Air-cooled)	200 A at 100% duty cycle 250 A at 60% duty cycle	70–900 ipm (1.8–23 m/min.)	.030–1/16 in. (0.8–1.6 mm) aluminum wire	H: 7.375 in. (187 mm) W: 1.875 in. (48 mm) D: 10.625 in. (270 mm)	2.2 lb. (1 kg)
XR-Pistol Plus (Water-cooled)	400 A at 100% duty cycle		Requires gun wire kit 230708 to run 1/16 in. (1.6 mm) wire		2.4 lb. (1.1 kg)

Note: XR Plus guns are only compatible with MPa Plus feeder, Intellx Elite feeder, Intellx Elite ROI/remote wire drive or Intellx Elite Swingarc boom-mounted feeder.



Certified by Canadian Standards Association to both the Canadian and U.S. Standards.



Conforms to European standards.

Drive Roll Kits and Guides

Select drive roll kits from chart below according to type and wire size being used.

Drive roll kits include four drive rolls, necessary guides and feature an anti-wear sleeve for inlet guide.

WIRE SIZE	V-GROOVE FOR HARD WIRE 	U-GROOVE FOR SOFT WIRE OR SOFT-SHELLED CORED WIRES 	V-KNURLED FOR HARD-SHELLED CORED WIRES 	U-COGGED FOR EXTREMELY SOFT WIRE OR SOFT-SHELLED CORED WIRES, (I.E., HARD FACING TYPES) 
.023/.025 in. (0.6 mm)	087132	—	—	—
.030 in. (0.8 mm)	046780	—	—	—
.035 in. (0.9 mm)	046781	044750	046792	—
.040 in. (1.0 mm)	191917	—	—	—
.045 in. (1.1/1.2 mm)	046782	046785	046793	083319
.052 in. (1.3/1.4 mm)	046783	046786	046794	—
1/16 in. (1.6 mm)	046784	046787	046795	046800
.068/.072 in. (1.8 mm)	—	—	—	—
5/64 in. (2.0 mm)	—	046788	046796	046801

*Included with Intellx feeder packages. Drive roll is dual-size reversible with one .035-inch and one .045-inch groove.

**Included with push-pull gun packages. Drive roll is dual-size reversible with one .035-inch and one .045-inch groove which also accommodates .047-inch (3/64-inch) wire.

Wire Guides

WIRE SIZE	INLET GUIDE	INTERMEDIATE GUIDE
.023–.040 in. (0.6–1.0 mm)	221030	056206
.045–.052 in. (1.2–1.3 mm)	221030	056207
1/16–5/64 in. (1.6–2.0 mm)	221030	056209
5/64–1/8 in. (2.0–3.2 mm)	229919	056211

Note: When ordering hard wire kits, retain factory-supplied inlet guide.


Nylon Guides for Feeding Aluminum

WIRE SIZE	INLET GUIDE AND INTERMEDIATE GUIDE KITS
.035 in. (0.9 mm)	293928
.047 in. (1.2 mm)	293929
1/16 in. (1.6 mm)	293930

Note: U-groove drive rolls are recommended when feeding aluminum wire.


Typical Deltaweld® 500/600 System Installations

Standard installation

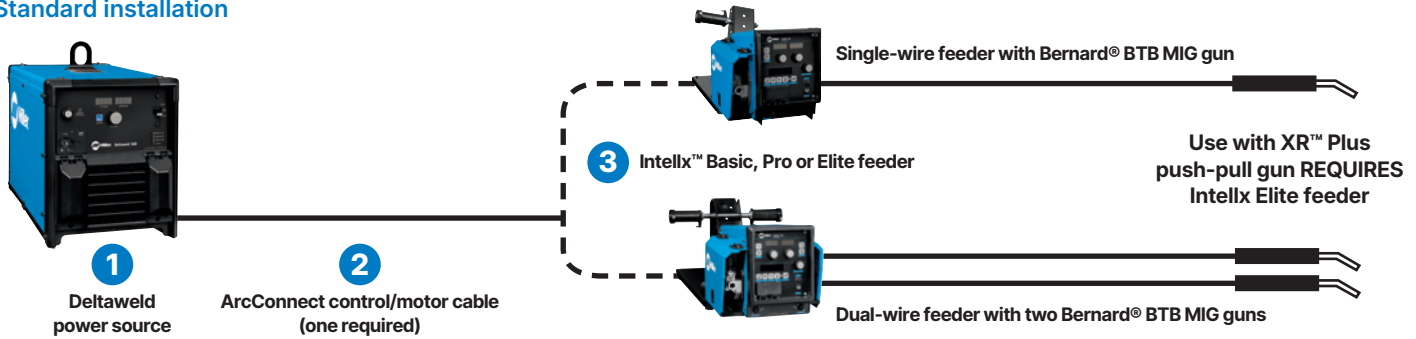


Remote wire drive installations

Ideal for fixed automation and boom applications where the wire drive motor is installed/controlled remotely.

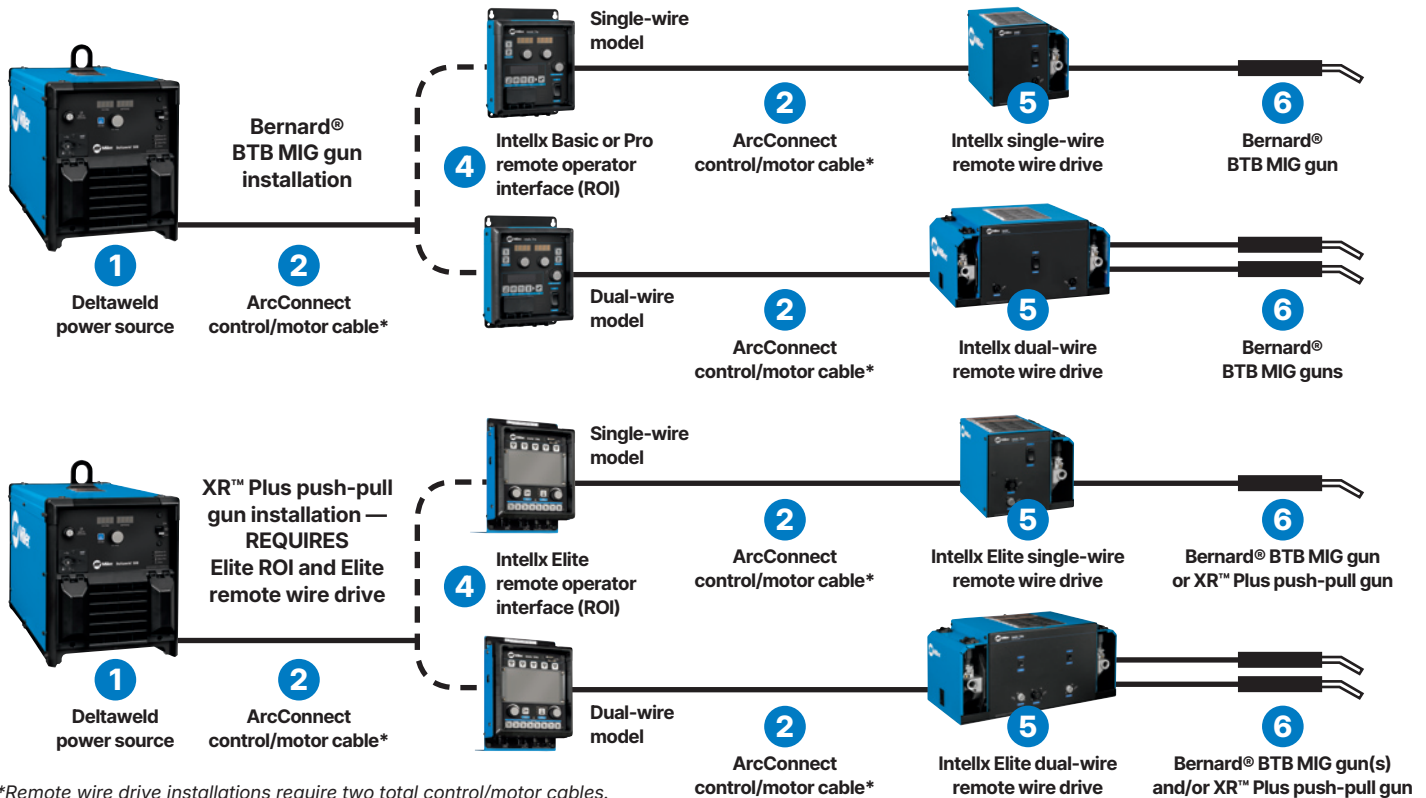

Swingarc™ boom-mounted installation

Accommodates a wide variety of semi-automatic applications, including large weldments and hard-to-reach areas.

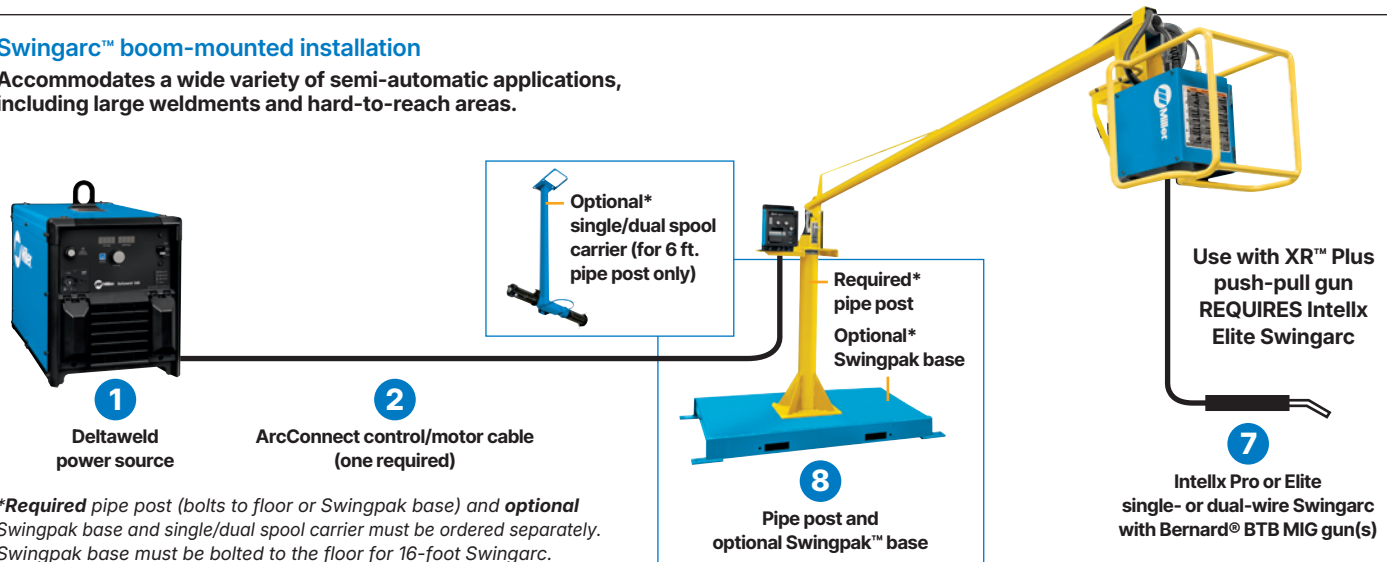

*Required pipe post (bolts to floor or Swingpak base) and optional Swingpak base and single/dual spool carrier must be ordered separately. Swingpak base must be bolted to the floor for 16-foot Swingarc. See page 11.

Ordering Information (Most popular models ◀)

Configure a Custom Deltaweld System (See corresponding item numbers in Typical Deltaweld Systems Installations on page 10.)
See page 12 for packages.

EQUIPMENT AND OPTIONS	STOCK NO.	DESCRIPTION	QTY.	PRICE
1 Power Source				
Deltaweld™ 500 208/230/460 V	907785 ◀ 907785001 907785002* 907785003*	With ArcConnect and meters With ArcConnect, meters and 14-pin receptacle With ArcConnect, meters and Insight With ArcConnect, meters, 14-pin receptacle and Insight		
Deltaweld™ 600 208/230/460 V	907941003*	With ArcConnect, meters, 14-pin receptacle and Insight		
Deltaweld™ 500 575 V	907786 907786001 907786002* 907786003*	With ArcConnect and meters With ArcConnect, meters and 14-pin receptacle With ArcConnect, meters and Insight With ArcConnect, meters, 14-pin receptacle and Insight		
Deltaweld™ 600 575 V	907942003*	With ArcConnect, meters, 14-pin receptacle and Insight		
Insight Field Install Kit	289303	Adds Insight Centerpoint™ Basic mode to non-Insight power sources above. See page 6		
2 Cables and Leads				
ArcConnect Control/Motor Cables		See page 8 for available lengths		
Work Sense Leads (volt sense)		See page 8 for available lengths		
3 Feeder, ROI and Swingarc				
Intellx™ Basic Bench-Style Wire Feeders	951783001 951815001	Single-wire feeder with Bernard BTB Gun 400 A Dual-wire feeder with two Bernard BTB Gun 400 A	With AccuLock™ consumables and .035/.045 in. V-groove drive rolls	
Intellx™ Pro Bench-Style Wire Feeders	951784001 ◀ 951816001	Single-wire feeder with Bernard BTB Gun 400 A Dual-wire feeder with two Bernard BTB Gun 400 A		
Intellx Elite Bench-Style Wire Feeders	951000282 951000283	Single-wire feeder with Bernard BTB Gun 400 A Dual-wire feeder with two Bernard BTB Gun 400 A		
4				
Intellx Basic Remote Operator Interface (ROI)	301548 301551	Control box for single-wire drive assembly Control box for dual-wire drive assembly		
Intellx Pro Remote Operator Interface (ROI)	301552 301553	Control box for single-wire drive assembly Control box for dual-wire drive assembly		
Intellx Elite Remote Operator Interface (ROI)	301606 301607	Control box for single-wire drive assembly. ONLY for use with Intellx Elite remote wire drive Control box for dual-wire drive assembly. ONLY for use with Intellx Elite remote wire drive		
5				
Intellx Remote Wire Drives	301554 301555	Single-wire drive assembly Dual-wire drive assembly		
Intellx Elite Remote Wire Drives	301722 301723	Single-wire drive assembly. ONLY for use with Intellx Elite ROI Dual-wire drive assembly. ONLY for use with Intellx Elite ROI		
6				
Bernard® BTB Gun 400 A	Q4015AE9EMC	400 A, 15 ft. (4.6 m) with AccuLock™ consumables		
XR™ Plus Push-Pull Guns		ONLY for use with Intellx Elite wire feeder, Elite ROI/remote wire drive or Elite Swingarc boom-mounted wire feeder. See page 9		
7				
Intellx Pro Swingarc™ Boom-Mounted Wire Feeders	951804001 951806001 951932001	12 ft. single-wire model with Bernard BTB Gun 400 A 16 ft. single-wire model with Bernard BTB Gun 400 A 12 ft. dual-wire model with two Bernard BTB Gun 400 A	With AccuLock™ consumables and .035/.045 in. V-groove drive rolls	
Intellx Elite Swingarc™ Boom-Mounted Wire Feeders	951000091 951000093 951000092	12 ft. single-wire model with Bernard BTB Gun 400 A 16 ft. single-wire model with Bernard BTB Gun 400 A 12 ft. dual-wire model with two Bernard BTB Gun 400 A		
8				
Pipe Post	149838 149839	4 ft. pipe post. Required for mounting Swingarc booms 6 ft. pipe post. Required for mounting Swingarc booms		
Swingpak™ Base	183997	Optional mounting platform for pipe post		
Single/Dual Spool Carrier	300352	Optional spool carrier for 6 ft. pipe post		
Accessories				
Industrial Cart	301758	For Deltaweld 350/500/600		
Cart Accessory Kit		For single- or dual-wire bench feeders. See page 8		
Stationary Handle Kit	301529			
Feeder Accessories		See page 8		
Coolant Systems				
Industrial Water Cooler	301759	See page 8		
Coolant Fitting	081543	5/8-18 UNF-2B LH thread		
Coolant	043809	See page 8		

DATE:

TOTAL QUOTED PRICE:

*Includes Insight Centerpoint™ Basic mode. Insight Centerpoint Basic mode requires Centerpoint license(s).
Optional Insight Centerpoint Premium (301490) can be added for use with Intellx Elite feeder/ROI.

Ordering Information (Most popular models ◀)

DELTAWELD® 500 PACKAGES	STOCK NO.	DESCRIPTION	QTY.	PRICE
Deltaweld 500 MIGRunner™ with Single-Wire Intellx™ Basic	951000147	Includes Deltaweld 500 power source (907785), single- or dual-wire Intellx Basic feeder with Bernard® BTB Gun 400 A (two with dual-wire feeder) and AccuLock™ consumables. See page 7 for complete package description		
Deltaweld 500 MIGRunner with Dual-Wire Intellx Basic	951000148			
Deltaweld 500 MIGRunner with Single-Wire Intellx Pro	951000149 ◀	Includes Deltaweld 500 power source (907785), single- or dual-wire Intellx Pro feeder with Bernard® BTB Gun 400 A (two with dual-wire feeder) and AccuLock™ consumables. See page 7 for complete package description		
Deltaweld 500 MIGRunner with Dual-Wire Intellx Pro	951000151			
Deltaweld 500 MIGRunner with Single-Wire Intellx Elite	951000280	Includes Deltaweld 500 power source (907785, or 907785002 on Insight package), single- or dual-wire Intellx Elite feeder with Bernard® BTB Gun 400 A (two with dual-wire feeder) and AccuLock™ consumables. See page 7 for complete package description		
Deltaweld 500 MIGRunner with Insight and Single-Wire Intellx Elite	951000281*			
Deltaweld 500 MIGRunner with Dual-Wire Intellx Elite	951000277			
Deltaweld 500 with Insight, Running Gear, and Cart Accessory Kit	907898*	Same as above, but without wire feeder and MIG gun (see options on page 11). If ordering a dual-wire feeder, also order accessory kit (301579)		
Deltaweld 500 (575 V) MIGRunner with Single-Wire Intellx Pro	951000155 ◀	Includes Deltaweld 500 (575 V) power source (907786), single-wire Intellx Pro feeder with Bernard® BTB Gun 400 A and AccuLock™ consumables. See page 7 for complete package description		
Deltaweld 500 (575 V) with Insight Running Gear, and Cart Accessory Kit	907900*	Same as above, but without wire feeder and MIG gun (see options on page 11). If ordering a dual-wire feeder, also order accessory kit (301579)		

DATE :

TOTAL QUOTED PRICE :

**Includes Insight Centerpoint™ Basic mode. Insight Centerpoint Basic mode requires Centerpoint license(s). Optional Insight Centerpoint Premium (301490) can be added for use with Intellx Elite feeder/ROI.*

Distributed by:

