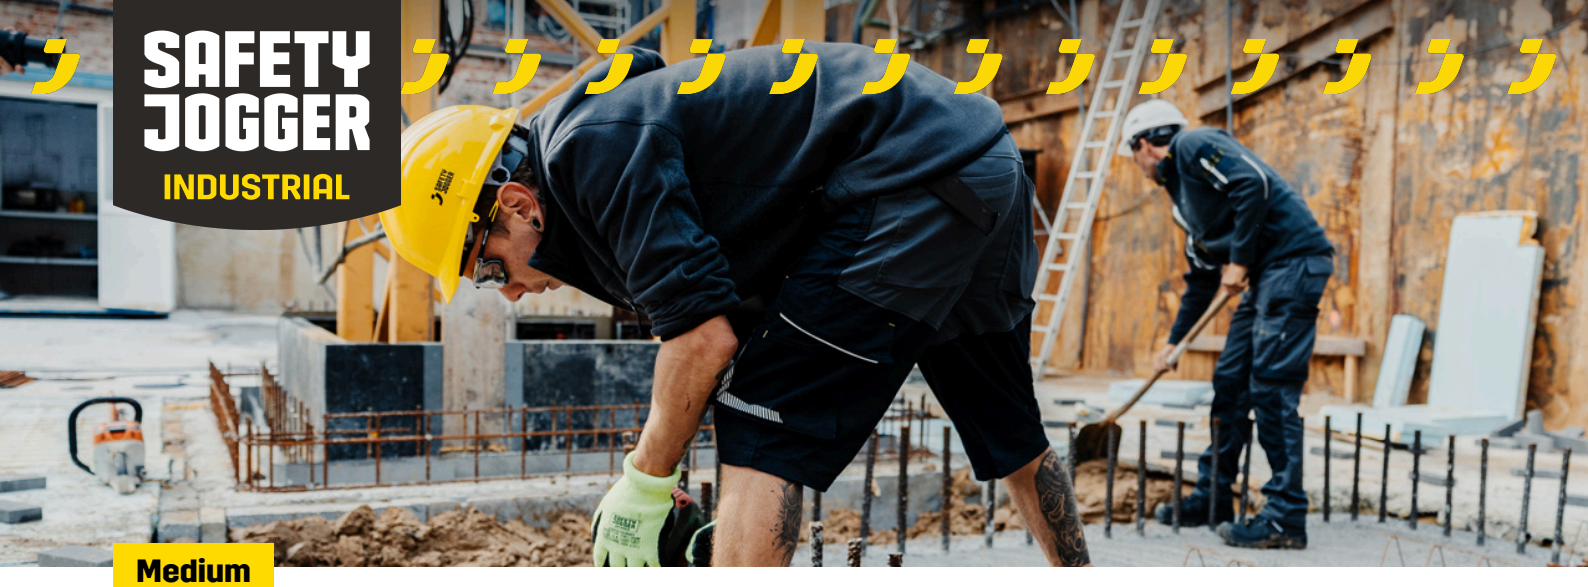

SAFETY JOGGER INDUSTRIAL

Medium

DAKAR EW S3

DAKAREWS3

Extra-Wide Steel Toe Safety Boots

DAKAR EW S3 steel toe safety shoes with oil and fuelresistant outsole for stability and waterresistant leather for comfort in tough conditions.

Upper	Textile, Crazy Horse Leather
Lining	Recycled Mesh (100% recycled)
Footbed	SJ Recycled Foam Footbed (96% recycled)
Midsole	Steel
Outsole	BASF PU/BASF PU
Toecap	Steel
Category	S3 / SR, SC, LG, FO, CI
Size range	EU 35-48 / UK 3.0-13.0 / US 3.0-13.5 JPN 21.5-31.5 / KOR 230-315
Sample weight	0.703 kg
Norms	ASTM F2413:2018 EN ISO 20345:2022+A1:2024

BLK

BRN

Breathable leather upper
Natural leather provides a high degree of wearer comfort combined with durability in versatile applications.

Ladder Grip (LG)
Especially defined contour in the shank area of a safety shoe to provide additional safety while standing on ladders.

Oil & fuel resistant
The outsole is resistant against oil and fuel.

S3
S3 safety shoes are suitable for work in an environment with high humidity and presence of oil or hydrocarbons. These shoes also protect against perforation risk of the sole, and foot crushing.

Scuff Cap (SC)
Separately tested material to cover the toe cap area to reduce abrasion of the upper material (e.g. during kneeling operations) and extend usability of the safety shoe.

SJ Foam
Removable comfortable antistatic footbed providing fit, guidance and optimum shock absorption in heel and forefoot. Breathable and moisture absorbing.

Industries:
Construction, Logistics

Environments:
Muddy environment, Dry environment, Wet environment

Maintenance instructions:
To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator, nor nearby a heat source.

	Description	Measure unit	Result	EN ISO 20345
Upper	**Textile, Crazy Horse Leather**			
	Upper: permeability to water vapor	mg/cm²/h	68	≥ 0.8
	Upper: water vapor coefficient	mg/cm²	7.8	≥ 15
Lining	**Recycled Mesh (100% recycled)**			
	Lining: permeability to water vapor	mg/cm²/h	46.42	≥ 2
	Lining: water vapor coefficient	mg/cm²	372	≥ 20
Footbed	**SJ Recycled Foam Footbed (96% recycled)**			
	Footbed: abrasion resistance (dry/wet) (cycles)	cycles	Dry 25600 cycles/Wet 12800 cycles	25600/12800
Outsole	**BASF PU/BASF PU**			
	Outsole abrasion resistance (volume loss)	mm³	50	≤ 150
	Basic Slip resistance - Ceramic + NaLS - Forward heel slip	friction	0.46	≥ 0.31
	Basic Slip resistance - Ceramic + NaLS - Backward forepart slip	friction	0.45	≥ 0.36
	SR Slip resistance - Ceramic + glycerin - Forward heel slip	friction	0.35	≥ 0.19
	SR Slip resistance - Ceramic + glycerin - Backward forepart slip	friction	0.34	≥ 0.22
	Antistatic value	MegaOhm	50.5	0.1 - 1000
	ESD value	MegaOhm	N/A	0.1 - 100
	Heel energy absorption	J	41	≥ 20
Toecap	**Steel**			
	Impact resistance toecap (clearance after impact 100J)	mm	N/A	N/A
	Compression resistance toecap (clearance after compression 10kN)	mm	N/A	N/A
	Impact resistance toecap (clearance after impact 200J)	mm	20.5	≥ 14
	Compression resistance toecap (clearance after compression 15kN)	mm	22.0	≥ 14

Sample size: 42

Our shoes are constantly evolving, the technical data above may change. All product names and brand Safety Jogger, are registered and may not be used or reproduced in any format, without written consent from us.