Product datasheet

Specifications



Isoled Analog Converter - 0..5 A - for Harmony Analog

Local distributor code:

387098719 RMCA61BD

Discontinued on: 29 Jun 2026

EAN Code: 3389110108880

Discontinued

Main

Range of product	Harmony Analog
Product or component type	Voltage/current converter
Analogue input type	Current 0...1.5 A AC/DC 50/60 Hz Current 0...15 A AC/DC 50/60 Hz Current 0...5 A AC/DC 50/60 Hz
Analogue output type	Current 0...20 mA <= 500 Ohm by cabling Current 4...20 mA <= 500 Ohm by cabling Voltage 0...10 V >= 100 kOhm by cabling

Complementary

Protection type	Reverse polarity protection on output Short-circuit protection on output Overvoltage protection on output (+/- 30 V)
abnormal analogue output voltage	-15...0 V no input or input wire broken
abnormal analogue output current	-30…0 mA, output selected 0...20 mA no input or input wire broken 4…30 mA, output selected 4...20 mA no input or input wire broken
[Us] rated supply voltage	24 V DC +/- 20 %, isolated
Current consumption	<= 70 mA for voltage output <= 90 mA for current output
Local signalling	LED (green) for power ON
Tightening torque	0.6…1.1 N.m
Marking	CE
Surge withstand	0.5 kV during 1.2/50 µs conforming to IEC 61000-4-5
[Ui] rated insulation voltage	2 kV
Fixing mode	By screws (mounting plate) Clip-on (35 mm symmetrical DIN rail)
Safety reliability data	B10d = 22108 MTTFd = 23.9 years
Net weight	0.15 kg

Environment

Standards	IEC 60947-1 IEC 60584-1
Product certifications	CSA UL GL
Fire resistance	850 °C conforming to IEC 60695-2-1 850 °C conforming to UL

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Shock resistance	50 gn for 11 ms conforming to IEC 60068-2-27
Vibration resistance	5 gn (f= 10…100 Hz) conforming to IEC 60068-2-6
Resistance to electrostatic discharge	6 kV (in contact) conforming to IEC 61000-4-2 level 3 8 kV (in air) conforming to IEC 61000-4-2 level 3
Resistance to fast transients	1 kV (on input-output) conforming to IEC 61000-4-4 2 kV (on power supply) conforming to IEC 61000-4-4
Disturbance radiated/conducted	CISPR 11 CISPR 22 group 1 - class B
Ambient air temperature for storage	-40…85 °C
Ambient air temperature for operation	0…50 °C mounting side by side 0…60 °C 2 cm spacing
Pollution degree	2 conforming to IEC 60664-1

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.400 cm
Package 1 Width	4.700 cm
Package 1 Length	8.000 cm
Package 1 Weight	175.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	33
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	6.100 kg
Unit Type of Package 3	P06
Number of Units in Package 3	528
Package 3 Height	75.000 cm
Package 3 Width	60.000 cm
Package 3 Length	80.000 cm
Package 3 Weight	106.000 kg

Logistical informations

Country of origin	ID

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**117 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**3 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**114 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.1 kg CO2 eq.**
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
SCIP Number	**A23b5c8f-6893-4fd3-af99-564158dacf76**
EU RoHS Directive	Compliant By Exemption
REACh Regulation	Reference contains Substances of Very High Concern above the threshold

Use Again


Repack and remanufacture

End of life manual availability	End of Life Information
Take-back	**No**

Dimensions Drawings

Analog Interface: Voltage/Current Converter

Dimensions

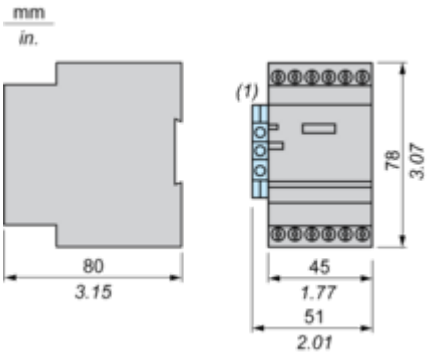


(1) Terminal block AB1TP435U or AB1RRNTP435U2


Mounting and Clearance

Mounting

Mounting on Rails AM1•••••




Panel Mounting

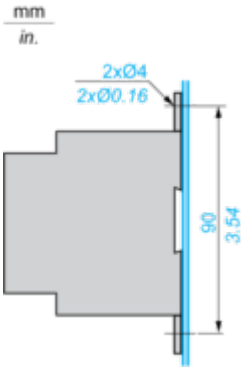

Connections and Schema

Analog Interface: Voltage/Current Converter


Wiring Diagment

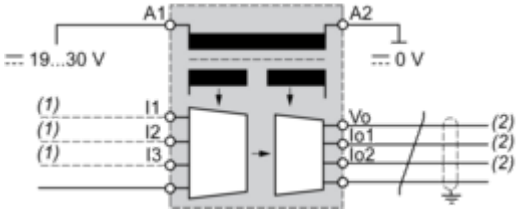

(1) Use 1 input only.
(2) Use 1 output only.
The input, output and power supply lines must be kept away from the power cables to avoid effects due to induced interference.
The supply, input and output cables must be shielded as indicated in the schemes and must be kept away from each other.


Image of product / Alternate images


Alternative

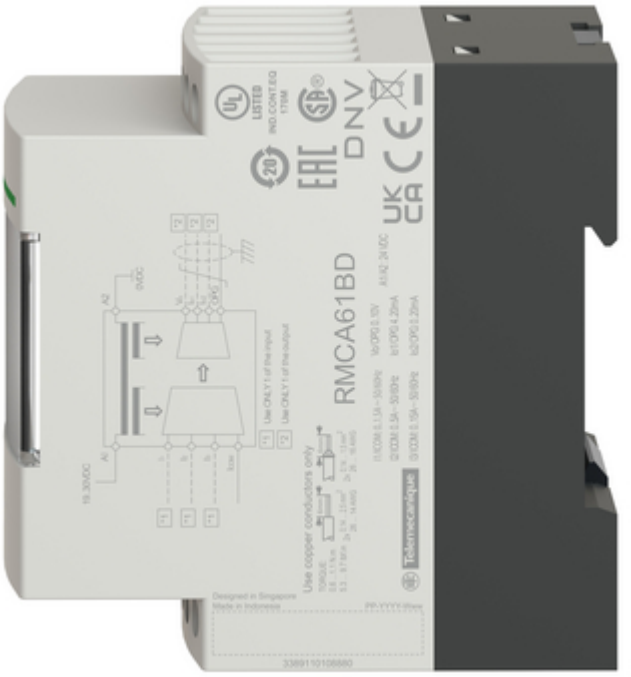






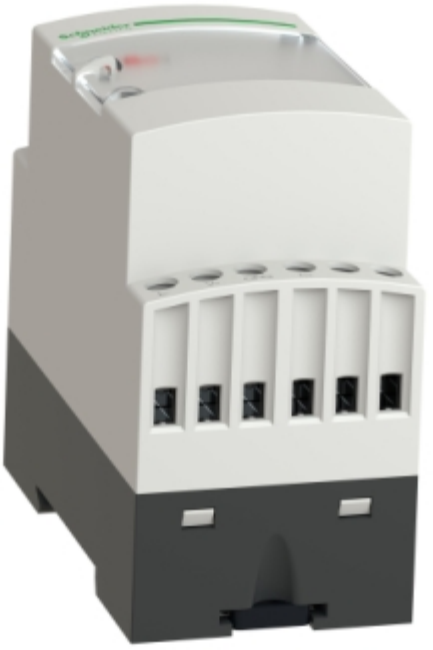

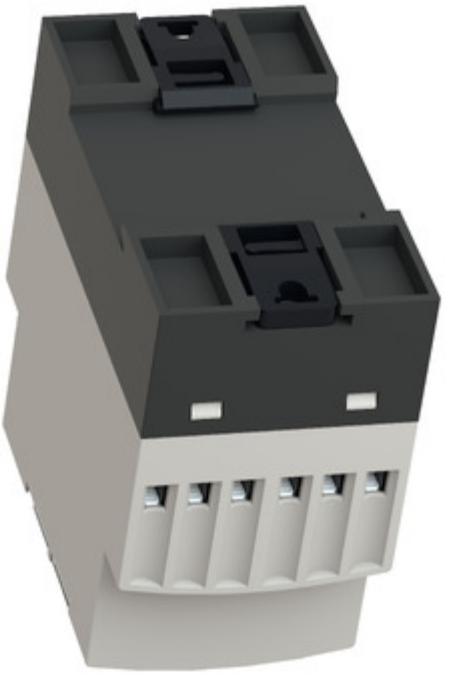

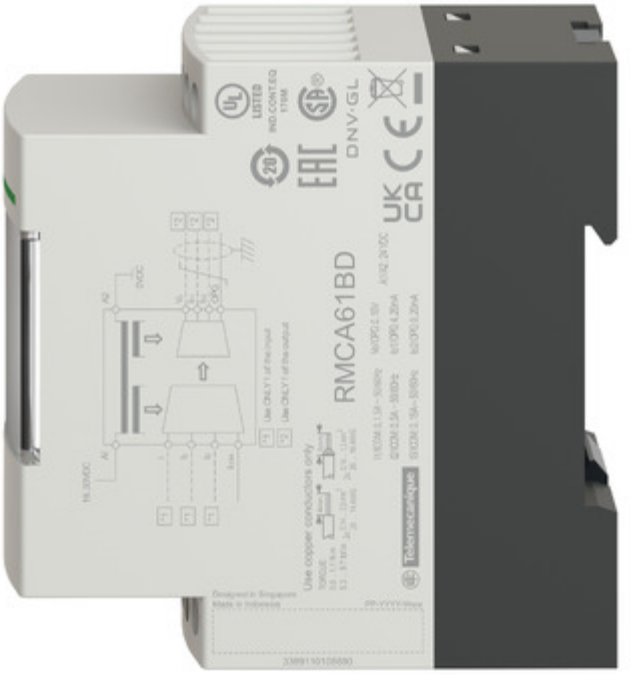
RMCA61BD
DNV·GL

