# Product datasheet

Specifications



## Monolithic pilot light, Harmony XB5, grey plastic, blue, 22mm, universal LED, plain lens, 230…240V AC

Local distributor code:

402651633 XB5EVM6

**Important message: A change in appearance may be noted on the product but does not affect its use in terms of function and safety. This makes it compatible with our Universal LED blocks**

**EAN Code: 3389119041676**

## Main

| | |
|---|---|
| **Range of product** | Harmony XB5 |
| **Product or component type** | Monolithic pilot light |
| **Device short name** | XB5 |
| **Bezel material** | Dark grey plastic |
| **Fixing collar material** | Plastic |
| **Head type** | Standard |
| **Mounting diameter** | 22.5 mm |
| **Sale per indivisible quantity** | 1 |
| **Shape of signaling unit head** | Round |
| **Cap/operator or lens colour** | Blue |
| **Operator additional information** | With plain lens |
| **Light source** | Universal LED |
| **Bulb base** | Integral LED |
| **Light source colour** | Blue |
| **[Us] rated supply voltage** | 230...240 V AC at 50/60 Hz |
| **Device presentation** | Monolithic product |

## Complementary

| | |
|---|---|
| **Height** | 29 mm |
| **Width** | 29 mm |
| **Depth** | 54 mm |
| **Terminals description ISO n°1** | (X1-X2)PL |
| **Net weight** | 0.038 kg |
| **Resistance to high pressure washer** | 7000000 Pa at 55 °C, distance : 0.1 m |
| **Connections - terminals** | Screw clamp terminals, <= 2 x 1.5 mm² with cable end conforming to IEC 60947-1<br>Screw clamp terminals, 1 x 0.22...2 x 2.5 mm² without cable end conforming to IEC 60947-1 |
| **[Ui] rated insulation voltage** | 250 V (pollution degree 3) conforming to IEC 60947-1 |
| **[Uimp] rated impulse withstand voltage** | 4 kV conforming to IEC 60947-1 |
| **Signalling type** | Steady |
| **Compatibility code** | XB5 |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

| | |
|---|---|
| **Supply voltage limits** | 195…264 V AC |
| **Current consumption** | 14 mA |
| **Service life** | 100000 h at rated voltage and 25 °C |
| **Surge withstand** | 1 kV conforming to IEC 61000-4-5 |

## Environment

| | |
|---|---|
| **Protective treatment** | TH |
| **Ambient air temperature for storage** | -40…70 °C |
| **Ambient air temperature for operation** | -25…70 °C |
| **Overvoltage category** | Class II conforming to IEC 60536 |
| **IP degree of protection** | IP66 conforming to IEC 60529<br>IP67 conforming to IEC 60529<br>IP69 conforming to IEC 60529<br>IP69K conforming to ISO 20653 |
| **Enclosure Type** | UL type 4X/13 |
| **IK degree of protection** | IK05 conforming to IEC 50102 |
| **Standards** | CSA C22.2 No 14<br>IEC 60947-5-4<br>IEC 60947-5-1<br>JIS C8201-5-1<br>IEC 60947-1<br>UL 508<br>JIS C8201-1 |
| **Product certifications** | UL listed<br>CSA |
| **Vibration resistance** | 5 gn (f= 12…500 Hz) conforming to IEC 60068-2-6 |
| **Shock resistance** | 50 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>30 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27 |
| **Resistance to fast transients** | 2 kV conforming to IEC 61000-4-4 |
| **Resistance to electromagnetic fields** | 10 V/m conforming to IEC 61000-4-3 |
| **Electromagnetic compatibility** | Electrostatic discharge - test level: 6 kV (on contact (on metal parts)) conforming to IEC 61000-4-2<br>Electrostatic discharge - test level: 8 kV (in free air (in insulating parts)) conforming to IEC 61000-4-2<br>Electromagnetic emission class B conforming to IEC 55011 |
| **Resistance to electrostatic discharge** | 6 kV on contact (on metal parts) conforming to IEC 61000-4-2<br>8 kV in free air (in insulating parts) conforming to IEC 61000-4-2 |
| **Electromagnetic emission** | Class B conforming to IEC 55011 |

## Packing Units

| | |
|---|---|
| **Unit Type of Package 1** | PCE |
| **Number of Units in Package 1** | 1 |
| **Package 1 Height** | 3.300 cm |
| **Package 1 Width** | 3.400 cm |
| **Package 1 Length** | 5.800 cm |
| **Package 1 Weight** | 25.000 g |
| **Unit Type of Package 2** | S01 |
| **Number of Units in Package 2** | 10 |

| | |
|---|---|
| **Package 2 Height** | 15 cm |
| **Package 2 Width** | 15 cm |
| **Package 2 Length** | 40 cm |
| **Package 2 Weight** | 570.000 g |

## Logistical informations

| | |
|---|---|
| **Country of origin** | ID |

## Contractual warranty

| | |
|---|---|
| **Warranty (in months)** | 18 |

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

### Environmental footprint

| | |
|---|---|
| Total lifecycle Carbon footprint | **6 kg CO2 eq.** |
| Carbon footprint of the manufacturing phase [A1 to A3] | **0.2 kg CO2 eq.** |
| Carbon footprint of the distribution phase [A4] | **0 kg CO2 eq.** |
| Carbon footprint of the installation phase [A5] | **0 kg CO2 eq.** |
| Carbon footprint of the use phase [B2, B3, B4, B6] | **6 kg CO2 eq.** |
| Carbon footprint of the end-of-life phase [C1 to C4] | **0 kg CO2 eq.** |
| Environmental Disclosure | Product Environmental Profile |

## Use Better

### Materials and Substances

| | |
|---|---|
| Packaging made with recycled cardboard | **Yes** |
| Packaging without single use plastic | **Yes** |
| SCIP Number | **3d14fd98-3859-4733-a5ee-a3016769973c** |
| EU RoHS Directive | Compliant By Exemption |
| REACh Regulation | Reference contains Substances of Very High Concern above the threshold |

## Use Longer

### Lifetime extension

| | |
|---|---|
| Product repair index | **A** |


## Use Again

### Repack and remanufacture

| | |
|---|---|
| Recyclability potential, in % | **22** |
| End of life manual availability | End of Life Information |
| Take-back | **No** |

Dimensions Drawings

## Dimensions

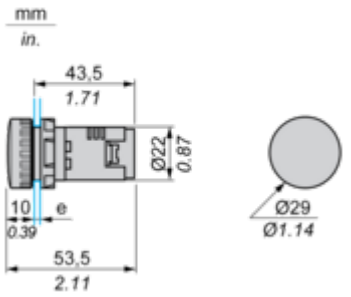


**e:** clamping thickness: 1 mm to 6 mm / 0.03 in. to 0.24 in.

Image of product / Alternate images

**Alternative**

