SICK.COM



DATA SHEET

WL4SL-3P2232

W4
Photoelectric sensors

SICK Sensor Intelligence



Illustration may differ

PHOTOELECTRIC SENSORS

WL4SL-3P2232

ORDERING INFORMATION

Type	part no.
WL4SL-3P2232	1061561

Further device versions and accessories at www.sick.com/W4

DETAILED TECHNICAL DATA

FEATURES

Functional principle	Photoelectric retro-reflective sensor
Functional principle detail	Without reflector minimum distance (autocollimation/coaxial optics)
Sensing range max.	0 m ... 12 m [1]
Sensing range	0 m ... 8 m [1]
Polarisation filter	Yes
Emitted beam	
Light source	Laser [2]
Type of light	Visible red light
Light spot size (distance)	Ø 1 mm (500 mm)
Key laser figures	
Normative reference	EN 60825-1:2014, IEC 60825-1:2014 / CDRH 21 CFR 1040.10 & 1040.11
Laser class	1 [3]
Wave length	650 nm
Adjustment	Single teach-in button
Special applications	Detecting small objects
Mounting hole	M3

[1] Reflector PL80A.

[2] Average service life: 50,000 h at T_U = +25 °C.

[3] Do not intentionally look into the laser beam. Never point the laser beam at people's eyes.

SAFETY-RELATED PARAMETERS

$MTTF_D$	616 years (EN ISO 13849-1) [1]
DC_{avg}	0 %
T_M (mission time)	10 years

[1] Mode of calculation: Parts-Count-calculation.

ELECTRONICS

Supply voltage U_B	10 V DC ... 30 V DC [1]
Ripple	< 5 V_{pp} [2]
Current consumption	30 mA [3]
Protection class	III
Digital output	
Type	PNP [4]
Switching mode	Light/dark switching [4]
Output current $I_{max.}$	≤ 100 mA
Response time	≤ 0.5 ms [5]
Switching frequency	1,000 Hz [6]
Output function	Complementary
Circuit protection	A [7] B [8] C [9]

[1] Limit values when operated in short-circuit protected network: max. 8 A.

[2] May not fall below or exceed U_V tolerances.

[3] Without load.

[4] Q = light switching.

[5] Signal transit time with resistive load.

[6] With light/dark ratio 1:1.

[7] A = V_S connections reverse-polarity protected.

[8] B = inputs and output reverse-polarity protected.

[9] C = interference suppression.

MECHANICS

Housing	Rectangular
Design detail	Slim
Dimensions (W x H x D)	12.2 mm x 41.8 mm x 17.3 mm
Connection	Male connector M8, 4-pin
Material	
Housing	Plastic, Novodur
Front screen	Plastic, PMMA
Weight	100 g

AMBIENT DATA

Enclosure rating	IP66 IP67
Ambient operating temperature	–10 °C ... +50 °C
Ambient operating temperature extended	–30 °C ... +55 °C [1] [2]
Ambient temperature, storage	–30 °C ... +70 °C

[1] As of T_a = 50 °C, a max. supply voltage $V_{max.}$ = 24 V and a max. load current $I_{max.}$ = 50 mA is permitted.

[2] Operation below Tu –10 °C is possible if the sensor is already switched on at Tu > –10 °C, then cools down, and the supply voltage is subsequently not switched off. Switching on below Tu –10 °C is not permissible.

CERTIFICATES


EU declaration of conformity	✓

UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	✓
China RoHS	✓
China Compulsory Product Certification (CCC) exempt	✓
ECOLAB certificate	✓
Laser safety (IEC 60825-1) certificate	✓

CONNECTION DIAGRAM CD-083




CHARACTERISTIC CURVE

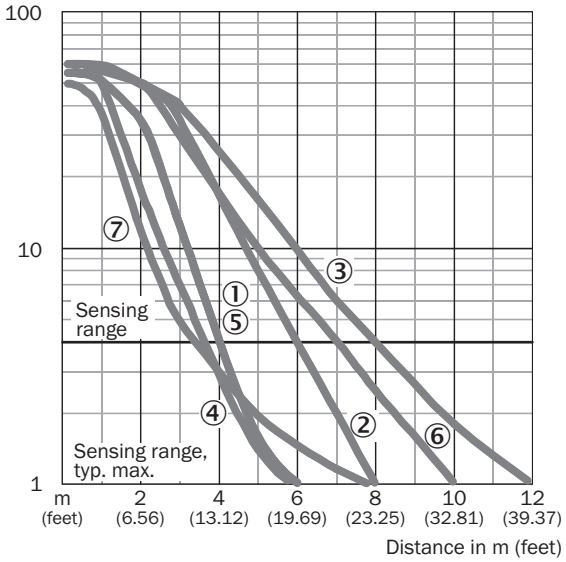

① Reflector PL20A
② Reflector PL40A
③ Reflector PL80A
④ PL10F reflector
⑤ Reflector PL20F
⑥ Reflector P250F
⑦ Reflective tape REF-AC1000


LIGHT SPOT SIZE

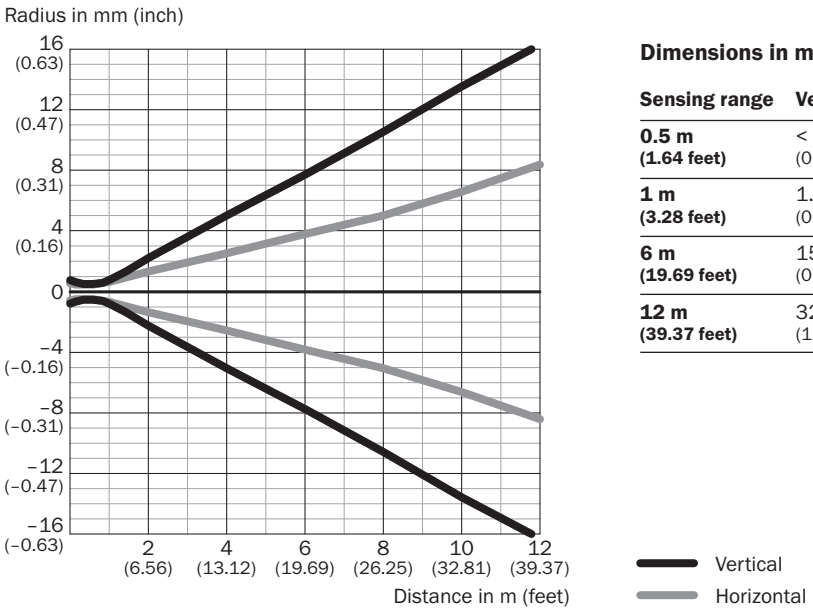


Dimensions in mm (inch)

Sensing range	Vertical	Horizontal
0.5 m (1.64 feet)	< 1.0 (0.04)	< 1.0 (0.04)
1 m (3.28 feet)	1.5 (0.06)	1.2 (0.05)
6 m (19.69 feet)	15.2 (0.60)	7.6 (0.30)
12 m (39.37 feet)	32.4 (1.28)	16.4 (0.65)

LIGHT SPOT SIZE (DETAILED VIEW)

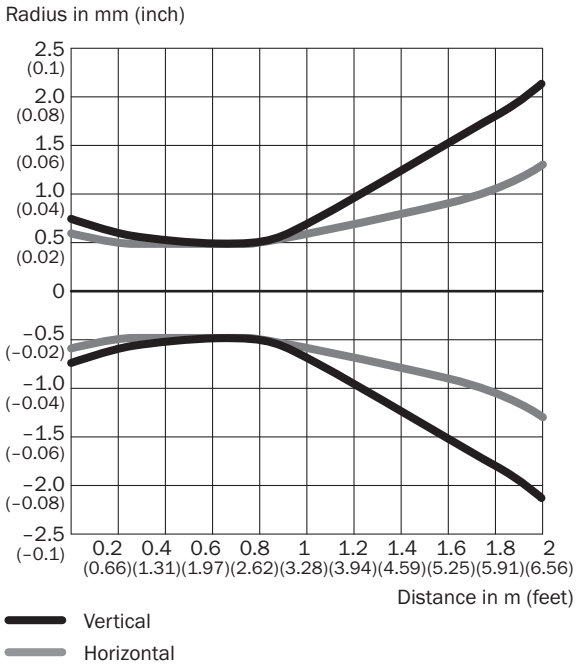


SENSING RANGE DIAGRAM

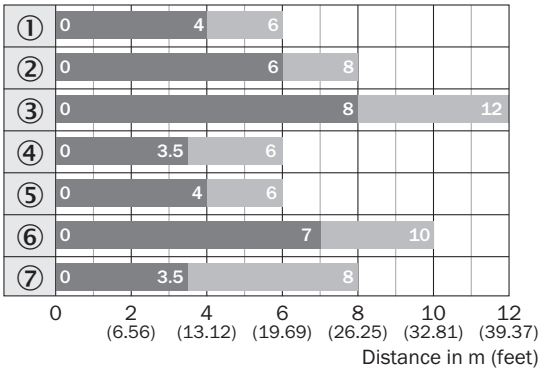

① Reflector PL20A
② Reflector PL40A
③ Reflector PL80A
④ PL10F reflector
⑤ Reflector PL20F
⑥ Reflector P250F
⑦ Reflective tape REF-AC1000

DIMENSIONAL DRAWING WL4SL-3, WL4SLG-3, WSE4SL-3, PLUG

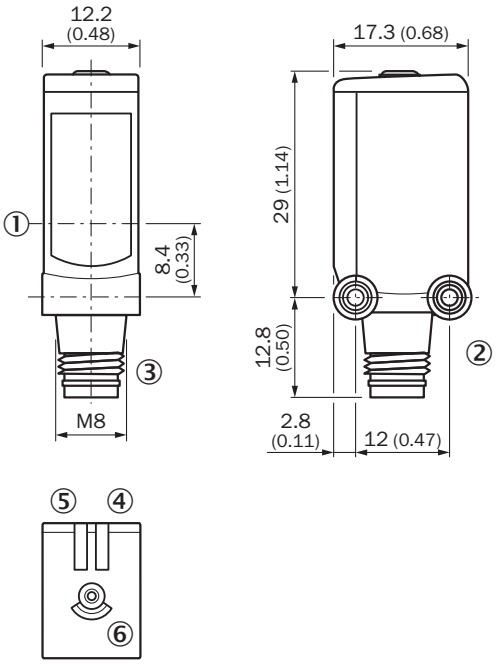

Dimensions in mm (inch)
① Center of optical axis
② Threaded mounting hole M3
③ Connection
④ LED indicator green: Supply voltage active
⑤ LED indicator yellow: Status of received light beam
⑥ single teach-in button

Further information as well as suitable accessories, example applications and downloads such as CAD dimensional models, operating instructions and software can be found at www.sick.com/1061561

SICK AG
WALDKIRCH
GERMANY
SICK.COM

SICK AT A GLANCE

SICK is a leading global technology company for intelligent sensors and integrated solutions in industrial automation. Our technologies set benchmarks, making your industrial processes more efficient, safer and more sustainable – both in logistics and manufacturing operations.

SICK combines sensor intelligence with industry expertise and certified consulting services. We provide the ideal foundation for scalable as well as tailor-made automation solutions and create added value along the entire value chain. Our close partnerships with our customers are more than just a promise: Together, we optimize productivity, improve quality, protect health and safety, and help build a sustainable future. All with empathy and trust.

Since 1946, we have been developing innovative technologies with passion and a pioneering spirit. With a global network in around 40 countries, SICK has a global presence and is always close by. The company's headquarters are located in Waldkirch near Freiburg, Germany. Our customers benefit from our understanding of both local and global requirements, which enables us to deliver tailor-made solutions

SICK

Sensor Intelligence