

# Technical Data Sheet

CODE 61721

## NORDIK INTERNATIONAL PLUS 140/56

Ceiling fans



### Certifications




CB TEST CERTIFICATE

## Technical and performance data

|                          |         |                          |        |
|--------------------------|---------|--------------------------|--------|
| Fan diameter             | 140     | giri_minuto              | 231    |
| Frequency (Hz)           | 50      | Max airflow (m³/h)       | 13500  |
| Insulation class         | I°      | Max airflow (m³/min)     | 225,00 |
| Max absorbed current (A) | 0,33    | Max flow speed (m/s)     | 1,69   |
| Max absorbed power (W)   | 70      | RPM                      | 231    |
| Voltage (V)              | 220-240 | Service value (m³/min)/W | 3,214  |
| Weight (Kg)              | 7,00    | Sound power Lw [dB(A)]   | 52,6   |

## Dimensions

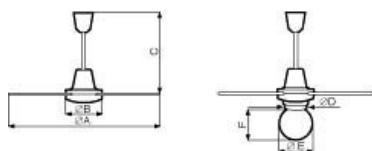

|             |        |
|-------------|--------|
| Size A (mm) | Ø 1422 |
| Size B (mm) | Ø 230  |
| Size C (mm) | 495    |

PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

#### UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

#### OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

# Technical Data Sheet

CODE 61721

## NORDIK INTERNATIONAL PLUS 140/56

Ceiling fans



## Description

- Nominal diameter of blades 1400 mm
- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour white
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant PP, colour white.
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings.
- Maximum air flow: 13,500 m<sup>3</sup>/h.
- 3 sheet steel blades powder coated with scratch-resistant polyester, colour white.
- Steel ceiling rod with polyester powder coated finish, colour white, length 375 mm.
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Factory-prepared to accept Light Kit (optional), suitable for lamp rated 150W max with E27 screw fitting, or equivalent energy-saving lamp with E27 screw fitting.
- Speed selectable by way of control units (optional)

## Accessories



**SCNR5  
UNIFICATA NK  
SOFFITTO**

Code 12955



**SCNRL5  
UNIFICATA NK  
SOFFITTO**

Code 12957



**KIT SCB5  
(TRASF.5 V.)**

Code 22483



**TELENORDIK  
5T**

Code 22387



**PLUS LIGHT  
KIT (KIT LUCE)**

Code 22415



**C 2.5  
(COMANDO EL.  
2.5 A)**

Code 12967



**SC 503 B**

Code 12801



**SC 503 N**

Code 12802



**SC EXT B**

Code 12803



**SCI503**

Code 22461



**PSC-W**

Code 22462

**PSC-B**

Code 22463

**KIT SCB  
(TRASF.E.C.)**

Code 22481

**ASTA NK I 200  
BIANCA**

Code 22032

**ASTA NK I 250  
BIANCA**

Code 22033

**ASTA NK I 350  
BIANCA**

Code 22042

**ASTA NK I 500  
BIANCA**

Code 22051

**ASTA NK I 750  
BIANCA**

Code 22074

**ASTA NK I 1000  
BIANCA**

Code 22077

**PER INFORMAZIONI / FOR INFORMATION****ITALY**

Pre Sales:

[prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

After Sales:

[postvendita@vortice-italy.com](mailto:postvendita@vortice-italy.com)**UNITED KINGDOM & REP. OF****IRELAND**

Sales Dept:

[sales@vortice.ltd.uk](mailto:sales@vortice.ltd.uk)

Technical Dept:

[technical@vortice.ltd.uk](mailto:technical@vortice.ltd.uk)**OTHER COUNTRIES**

Sales Dept:

[export@vortice-italy.com](mailto:export@vortice-italy.com)

After Sales:

[after-sales@vortice-italy.com](mailto:after-sales@vortice-italy.com)